July 1981
USA $2.95/DM 9.80

kilobaud

MICROCOMPUTING™


DESKTOP COMPUTING™

Make a Scene With Your Micro

Computerists Exhibit Their Art



Winchester Disk Drives:
Mass Storage Never Had It So Good

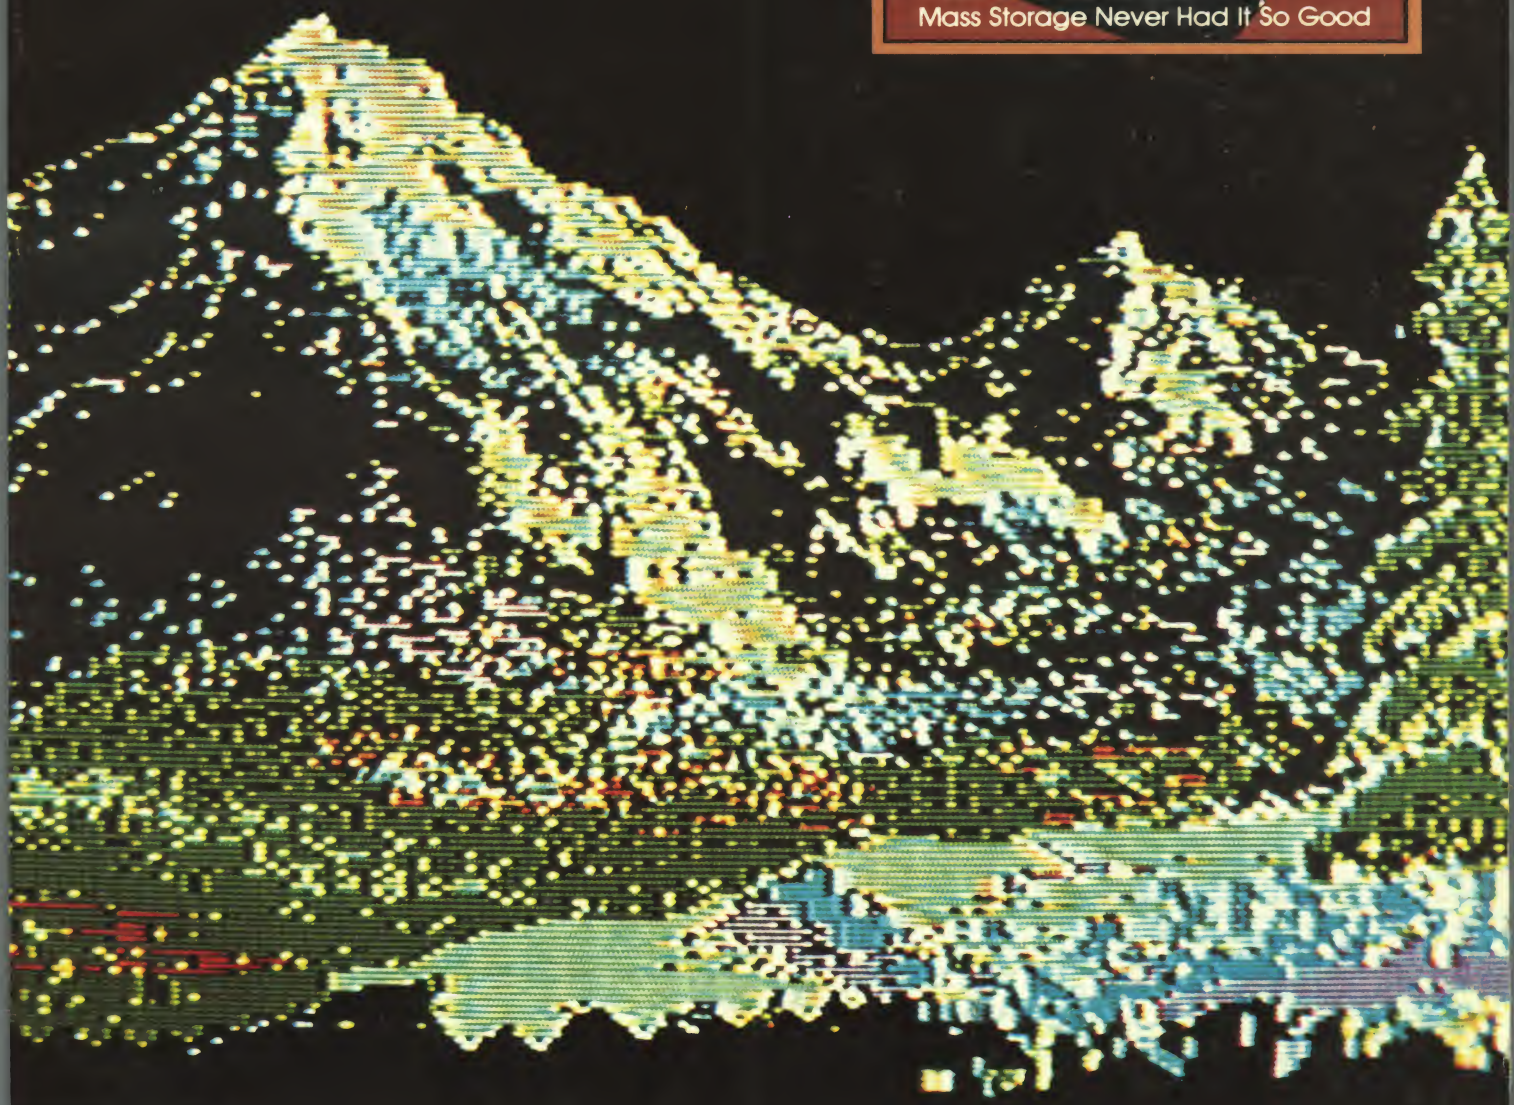




VDTs: Are They Hazardous? ☐ 6800 Mailing List ☐ Word Processor Extraordinaire ☐ Strolling on Wall Street with Your Micro ☐ Atari's Assembler Editor ☐ Add Extra Drive to Your Heath ☐ Orbit the Planets on Your Apple ☐ Build a Multi-Purpose Power Supply ☐ Inside Info on HDOS Disk Structure

Now! Color for Your . . .

SYSTEM-50

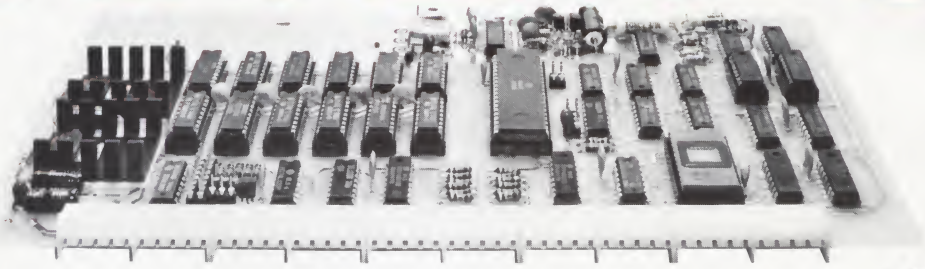

Introducing COLO*RAM*A-50™ Percom's SS-50 Bus Color VDG


Introductory Price $219.95

Featuring . . .

- **Eleven display formats** including 8-color semigraphics, 4-color graphics, 2-color high density graphics and 2-color alphanumerics.

  Moreover, two- and four-color displays may be switched between primary and complementary color sets under software control or from the keyboard.

  Full graphic resolutions range from 64 x 64 picture elements to 256 x 192 picture elements.
- **Instant display control:** The COLO*RAM*A-50™ is memory mapped: your MPU has direct, instant access to display RAM and display control registers.
- **Low-cost Modulator Option for Color TV Interface:** The COLO*RAM*A-50™ provides for installation of an inexpensive RF modulator such as Radio Shack PN 277-122 for operation using a color TV.



SS-50 Bus Department Store

Nobody supports the SS-50 bus like Percom:

- √ SS-50 Bus/Single-Board Computers with I/O ports & memory
- √ Static and Dynamic RAM cards — memory expansion kits
- √ LFD-400/800 1-, 2- and 3-drive mini-disk systems
- √ Color and monochrome memory-mapped display controllers
- √ Extendable 7-slot SS-50 bus motherboards
- √ Versatile prototyping boards: SS-50 and SS-30 bus
- √ Field-proven software: monitors, operating systems, drivers, editors, assemblers, debuggers and HLLs.

- **Mix in Sound:** With the optional modulator installed, you can complement your colorful displays with software-controlled audio.
- **Extended Addressing:** The COLO*RAM*A-50™ is compatible with the SS-50A bus *and* the extended-address SS-50C bus. Map the board into any of the sixteen 64-Kbyte banks of the 1-Mbyte SS-50C address space. The COLO*RAM*A-50™ card "defaults" to the first (lowest) bank for the SS-50A bus.
- **Cassettee I/O Option:** Add a few inexpensive components to the on-card circuitry provided and use an audio cassette for program/data storage.
- **Provision for On-Card Firmware:** Put your display operating system, cassette control program, etc. right on the COLO*RAM*A-50™ card in a 2516 (5-volt 2716) EPROM. Resides in the top 2-Kbyte of the card memory space.
- **Operating Software:** Included in the comprehensive users manual is a listing of a display operating system and cassette controller that may be implemented as a callable subroutine function from BASIC or existing operating systems. The programs are optionally available in a plug-in ROM for just $69.95.

System Requirements

The COLO*RAM*A-50™ is pin- and outline-compatible with the Percom System-50™ bus, the SS-50A (SS-50) bus and the SS-50C bus. The composite video-sync signal output will directly drive a color (or BW) video monitor. The output may be modulated for operation with a standard (NTSC) TV set. A modulator is not included. The COLO*RAM*A-50™ card occupies 8-Kbytes of memory in the upper half of a 64-Kbyte memory space. Included on-card is 1-Kbyte of display RAM which will accommodate alphanumeric displays, semigraphic displays and two low-density full-graphic displays. For the higher density graphic displays, additional display RAM is required. The optional RAM ICs may be installed on the card.

For quality Percom SS-50 bus products, see your nearby authorized Percom dealer. To order direct, call **toll-free, 1-800-527-1592.** *Prices and specifications subject to change without notice.* Prices do not include shipping and handling.

PERCOM DATA COMPANY INC
211 N KIRBY GARLAND TEXAS 75042
(214) 272 3421

PERCOM

™ trademark of Percom Data Company, Inc.

SOLVE THE STORAGE SHORTAGE

with ten multi-user megabytes





CompuStar's 8-inch Winchester



Intertec's exclusive 255 User Controller



CompuStar Cable Assembly

If you could think of just one way to improve our phenomenally popular SuperBrain, what would it be? More disk storage? Well, we already thought about it. And for only a few thousand dollars for a whopping 10 megabytes of lightning-fast storage, it's nothing short of another major breakthrough! From the company that wrote the book on price/performance . . . Intertec.

Our New CompuStar™ 10 Megabyte Disk Storage System (called a DSS) features an 8 inch Winchester drive packaged in an attractive, compact desktop enclosure. Complete with disk, controller and power supply. Just plug it into the Z80 adaptor of your SuperBrain and turn it on.* It's so quiet, you'll hardly know it's there. But, you'll quickly be astounded with its awesome power and amazing speed.

*Some models require hardware/software modification.

The secret behind our CompuStar DSS is its unique controller/multiplexor. It allows many terminals to "share" the resources of a single disk. So, not only can you use the DSS with your SuperBrain, you can configure multiple user stations using our new series of CompuStar™ terminals, called Video Processing Units or VPU's™.

Four CompuStar VPU's are available. At prices starting at less than $2,500. Some models are designed to operate as stand-alone microcomputers, with internal disk storage. Just like your SuperBrain. Each model features its own 64K of RAM and can be "daisy-chained" into a powerful multi-user network. Just connect one VPU into the next. Using easy-to-install cable assemblies. Connect up to 255 users in a single system. One at a time. As you need them.

Whether you need an extra 10 megabytes for your SuperBrain or an enormous multi-user network, the CompuStar™ DSS solves your storage shortage problems. Sensibly. And economically. Plus, your investment is protected by a nationwide service network with outlets in most major U.S. cities. Providing efficient on-site or depot maintenance.

Get a demonstration of this extraordinary new system today. Call or write now for the name and address of your nearest CompuStar dealer.

INTERTEC DATA SYSTEMS. -3

2300 Broad River Rd. Columbia, S.C. 29210
(803) 798-9100 TWX: 810-666-2115

MICROCOMPUTING

PUBLISHER/EDITOR
Wayne Green
EXECUTIVE VICE PRESIDENT
Sherry Smythe
EDITORIAL MANAGER
Jeff DeTray
PUBLICATIONS MANAGER
Edward Ferman
MANAGING EDITOR
Dennis Brisson
ASSISTANT MANAGING EDITOR
Susan Gross
COPY EDITOR
Eric Maloney
EDITORIAL ASSISTANT
Linda Stephenson
ADMINISTRATIVE ASSISTANTS
Pat Graham, Nancy Noyd
ASSOCIATE EDITORS
Robert Baker, Ken Barbier, Frank Derfler, Jr., Rod Hallen, Peter Stark, Sherm Wantz

PRODUCTION MANAGER/PUBLICATIONS
Nancy Salmon
ASSISTANT PRODUCTION MANAGER
Michael Murphy
ART DIRECTOR
Diana Shonk
ADVERTISING GRAPHICS
Robert Drew, Bruce Hedin, Steve Baldwin, Jane Preston
PRODUCTION DEPARTMENT
Joan Ahern, Fiona Davies, Linda Drew, Bob Dukette, Sandra Dukette, Gary Graham, Kenneth Jackson, Ross Kenyon, Theresa Ostebo, Dianne Ritson, Deborah Stone, Susan Symonds, Thomas Villeneuve, Donna Wohlfarth
PHOTOGRAPHY
William Heydolph, Terrie Anderson, Bill Suttenfield
TYPESETTING
Barbara Latti, Sara Bedell, Michele DesRochers, Stephen Jewett, Luann Keddy, Mary Kinzel, Karen Stewart

CORPORATE CONTROLLER
Charles Garniss, Jr.
EXECUTIVE ASSISTANT
Leatrice O'Neil
ACCOUNTING MANAGER
Knud Keller
CIRCULATION MANAGER
Debra Boudrieau
CIRCULATION
Doris Day, Pauline Johnstone, Dion Owens, designer
BULK SALES MANAGER
Ginnie Boudrieau
ASSISTANT TO THE PRESIDENT
Matthew Smith
ADVERTISING
603-924-7138
Kevin Rushalko, Mgr.
Louise Caron, Hal Stephens, Marcia Stone

APPLICATIONS

143 **6800 Disk-Based Mailing List** Dr. Gordon W. Wolfe — SWTP
Here's a timesaving approach to handling subscription lists.

150 **Electronic Orrery** Fred J. Gunther — Apple
Simulate planetary motion using high-resolution graphics.

167 **Get on the PET Instrument Bus** Kepa Zubeldia — PET
The PET as a real-time bus controller.

BUSINESS

126 **Put Your Micro on Wall Street** Dex Hart
This BASIC program gives you portfolio values at a glance.

GENERAL INTEREST

34 **Right on Target with Winchester** Martin Moore
The latest rung on the mass storage ladder is hard disk.

42 **Video Dismay Terminals** Eric Maloney
Are they hazardous to your health?

44 **Ionizing Radiation and VDTs** Dr. Gordon W. Wolfe
How much is too much?

GRAPHICS

92 **TRS-80 Graphics on the Heath H-19** D. C. Shoemaker — Heath
BASIC subroutines let you reformat graphics.


94 **6800 High-Speed, High-Resolution Graphics** Terry Mayhugh — SWTP
At last–graphics as good as any, and it doesn't eat up memory.

104 **A One-Two Punch for CBM/PET Graphics** J. W. Froelich — PET
This hardware/software combo delivers a knockout graphics display.

108 **Mix it Up on Your Apple** R. Daniel Bishop — Apple
Display text on your screen while using Apple's HIRES page-2 graphics.

116 **New, Improved Sorcerer Graphics** Avram R. Vener — Sorcerer
Use graphics routines in a BASIC program.

120 **Hot Rod Graphics** Dorn Greenwood — OSI
Test your driving skills and the C1P's graphics capability.

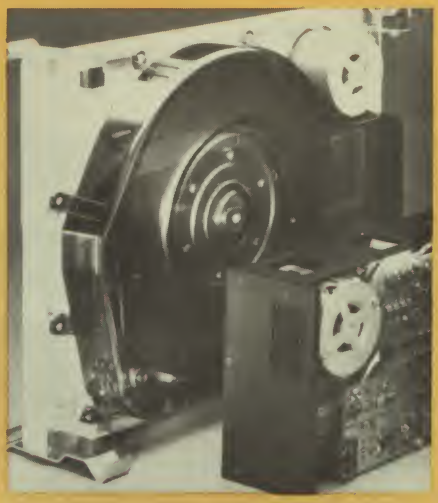

Page 34.

Page 42.



Contents: July 1981

Volume V
No. 7

HARDWARE PROJECTS

J. C. Hassall **Construct a Modular, Multi-Purpose Power Supply** 61
It can serve as a test fixture or power a small system.

6809 — David R. Rawson **Clock/Calendar for the 6809** 132
No complexities needed to implement time and date.

George Young **A Proven Formula to Program 2716s** 162
6502 + two 6522s + four DIP cables = 2716 programmer.

REVIEWS

Atari — Robert W. Baker **Atari's Assembler Editor** 74
Write assembly-language programs for your Atari.

Heath — Kirk L. Thompson **Shift into Extra Drive on Your Heath** 80
Expand your H-89 with this new H-77 floppy drive.

CP/M — Glenn A. Hart **Word Processor Extraordinaire** 152
Here's an in-depth look at WordStar.


TUTORIAL


Heath — E. Tom Jorgenson **Dissecting the HDOS Diskette** 66
Here's inside information on Heath's DOS.

DEPARTMENTS

Publisher's Remarks–6
PET-pourri–10
Dial-up Directory–16
Computer Blackboard–20
As the Word Turns–24
Micro Quiz–26
Micro-Scope–28
Letters to the Editor–32
Graphics Contest–84
Classifieds–172
Dealer Directory–173
New Products–198
New Software–206
Reader Reviews–212
Corrections–215
Book Reviews–216
Calendar–220
Perspectives–221

Page 84.

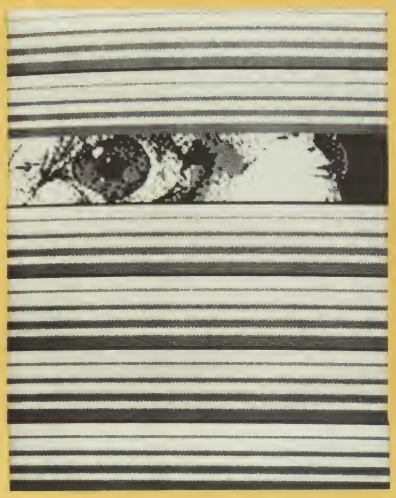

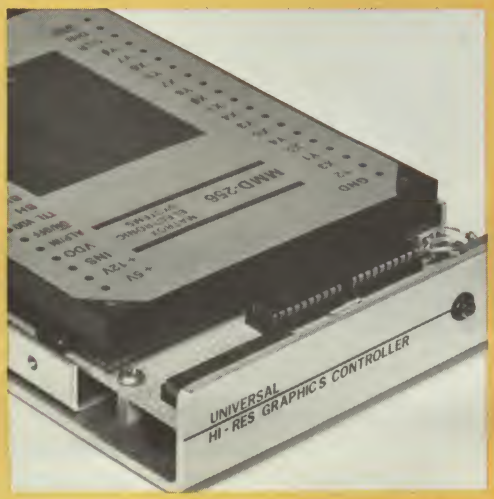

Page 94.

This month:

If a picture is worth 1K words, then this month's issue of *Kilobaud Microcomputing* can be measured in megabytes.

Our exploration of the world of graphics begins with the results of our graphics contest (p. 84). Entries were submitted in one of four categories—black and white and color video, and printer and plotter hard copy—and the results show the complexity you can achieve with a little programming skill and creativity.

As the graphics articles in this issue point out, graphics are for more than just cartoon animation or for games; they can be used to display statistics, in plotting and as a convenient aid in scanning data.

It is anticipated that the computer graphics field will triple within the next four years, due, in large part, to the growing uses of graphics in business. As this field continues to expand, we'd like to see more articles about how micrographics are being used as business tools.

—The Editors

Next month:

Next month *Kilobaud Microcomputing* will take a look at the popular Apple II and the much-heralded Apple III computers. We'll examine some unique applications for the versatile Apple II and find out what delayed the widespread introduction of the Apple III.

This month's cover:

The first place prize winner in *Kilobaud Microcomputing*'s first annual graphics contest was entitled "Mountains," by Ben Lanterman (12162 Haldane Court, Bridgeton, MO 63044). Ben's color video composition was produced with VersaWriter on a 48K Apple II microcomputer.

Photo inset: Shugart Technology's ST500 series 5.25-inch disk drive system. (Photo courtesy Seagate Technology)

Kilobaud *Microcomputing* (ISSN 0192-4575) is published monthly by Wayne Green, Inc., 80 Pine St., Peterborough NH 03458. Subscription rates in U.S. are $25 for one year and $53 for three years. In Canada: $27 for one year only, U.S. funds. Foreign subscriptions (surface mail)—$35 for one year only, U.S. funds. Foreign air mail subscriptions—$62 for one year only, U.S. funds. Canadian Distributor: Micron Distributing, 409 Queen St. West, Toronto, Ontario, Canada M5V 2A5. In Europe, contact: Monika Nedela, Markstr. 3, D-7778 Markdorf, W. Germany. South African Distributor: KB Microcomputing, PO Box 782815, Sandton, South Africa 2146. Australian Distributor: Electronic Concepts, Attention: Rudi Hoess, 55 Clarence Street, Sidney 2000, Australia. Second-class postage paid at Peterborough NH 03458 and at additional mailing offices. Phone: 603-924-3873. Entire contents copyright 1981 by Wayne Green, Inc. No part of this publication may be reprinted or otherwise reproduced without written permission from the publisher.

By Wayne Green

That's Show Biz

Commodore Hops onto The Circuit

Commodore Shows

Commodore has been putting on a series of shows. But, unlike Radio Shack, they have allowed spaces for their supporting firms, not just their own products. Radio Shack seems to pay lip service to their supporting manufacturers and software firms, but when it comes to letting them in on the act, even marginally, no dice.

The accompanying photos show some of the highlights of a Commodore show I recently attended in Boston.

Since most of the advertising for the show was on local TV and in the newspapers, the turnout was mostly interested businessmen and their families, with only a few hobbyists. I went down to see how the show went—and also to give a couple of talks on microcomputers. The turnout for the talks was not impressive, but those who did come were seriously interested and asked excellent questions.

I had hoped to meet some of the Commodore corporate people who were there, but they were far too busy talking with each other to meet many of us visitors. I was quickly introduced to several of them by Mike Tomczyk, Commodore marketing strategist, but was unable to talk with them.

The show was interesting, but many of us wondered if it was cost-effective. They sure spent a bundle for such a sparsely attended show.



One of the big hits of the show—perhaps to the consternation of the PET and CBM contingents—was the new VIC-20. Here's Mike Tomczyk, center, the VIC-20 guru, explaining it to an amazed crowd.



Commodore recently moved into Boston for a weekend, taking up the grand ballroom at the Sheraton in the Prudential Center. Commodore did a good job of organizing the show, with big signs showing what each participating firm was doing.

IBM, Where *Are* You?

Every so often one of the trade papers prints a story about IBM and their "about to be introduced" microcomputer. I don't think anyone in the industry is really anxious for the other shoe to drop.

A recent story claimed that the IBM machine will be S-100 compatible, in which case IBM will have both gone against all precedent for them and have pulled off one of the best coups in the micro business. Most of the early microcomputers used the S-100 bus, with the result that an enormous number of accessories and gadgets were built up around that standard. With the push of George Morrow, the S-100 has become an IEEE standard.

The first major firm to jump off the bus was Commodore. Then came Heath, and

YOUR ROAD TO VALUE IS. . .

PLAIN JANE™
DISKETTES
$19.95
BOX OF 10
SS, SS, 5¼"

DISKETTE
FILE BOX
$22.95
HOLDS 50-60
5¼" DISKS

DISK DRIVE
EXTENDER CABLE
$9.95
FOR VISTA, MTI, PERTEC, PERCOM & OTHERS

EPSON
MX-70 & MX-80
—PRINTERS—
CALL FOR PRICE

CABLE
$24.95
CONNECTS EPSON PRINTER & TRS-80 MICRO

"OTHER MYSTERIES"
VOLUMES I & II
$39.95
SAVE $12.50

TRI-STAR
FLOPPY SAVER™
HUB RING KIT
$8.95
FOR 5¼" DISKS

JULY SPECIALS!

METATRONICS
CORPORATION ✓161

TO ORDER
CALL TOLL FREE 1-800-321-9390
IN OHIO, call (216) 289-1210 (COLLECT)

VISA

MasterCard

RETAIL STORE
22297 EUCLID AVENUE
EUCLID, OHIO 44117
(EAST 222nd & EUCLID AVE.)

OFFICES
26111 BRUSH AVENUE
EUCLID, OHIO 44132
(SEND MAIL ORDERS HERE)

TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation. PLAIN JANE is a Trademark of Meta Technologies Corporation.

PRICES IN EFFECT
July 1, 1981 THRU
July 31, 1981,
Prices, Specifications, and Offerings subject to change without notice.

- Add $3.00 for shipping & handling.
- $3.00 EXTRA for C.O.D.
- Ohio residents add 6½% sales tax.

MOST ORDERS SHIPPED WITHIN ONE BUSINESS DAY

© 1981 by Metatronics Corp.

SUPER DISCOUNTS ON ALL COMPUTER EQUIPMENT

16K MEMORY ..... **ONLY $25.95!**
For **TRS-80** Keyboard or Expansion interface. KEYBOARD requires jumpers: $2.00 Extra. These are 200 ns tested RAM for the **TRS-80, APPLE** or **EXIDY.**

DISK DRIVES for the TRS-80 OR PMC-80:

All of our drives come complete with power supply and chassis. They may be used with existing Radio Shack drives on the same cable! 40 track drives store 102K bytes single density, and 175K double density. 80 track drives have 175K single density and 345K double density! All drives guaranteed 90 days, one year on power supply.

40 track MPI drives **$319.95**
40 track TEAC drives **$315.95**
40 track TANDON drives **$319.95**
80 track MPI drives **$449.95**
80 track TEAC drives **$429.95**
2 drive cable ..... **$ 25.95**
4 drive cable ..... **$ 39.95**
NEWDOS 80 OPERATING SYSTEM **$139.95**
NEWDOS 80 PATCH Patches **NEWDOS 80** to work with single or double density and the doubler..... **$ 59.95**
PERCOM'S DOUBLER for double density operation! **$219.95**
The **DOUBLER** works with the **TRS** or **PMC** expansion interfaces to allow you to use your drives in double density! You may still operate your drives as single density also! Comes with **DBLDOS** operating system which allows you to transfer single density files to double and vice versa! *GREAT BUY!*
DISKETTES: VERBATIM DATALIFE! *BOX OF TEN* SOFT OR HARD SECTORED 5¼' **$32.50**

WE HAVE DRIVES AND CONTROLLERS FOR THE MODEL III. CALL FOR PRICES!!!

MODEMS AND TELE-COMMUNICATIONS



LYNX Telecommunication system for the TRS-80 and PMC-80 .....**$279.95**
Includes terminal software and connections for instant hookup! Can be connected to the **TRS-80** or **PMC-80** with or without an expansion interface!

LEXICOM MODEM 300 BAUD Requires RS-232..... **$169.95**
THE SOURCE: Hook-up to the "SOURCE" ..... **$ 99.95**
ATARICONNECTION: Modem for 400/800, complete with software! **$249.00**
APPLECONNECTION: Modem for APPLE II **$279.95**

COMPLETE SYSTEMS:



PMC-80, 16K LEVEL II COMPUTER.....$739.00
The **PMC-80** is a work alike to the **TRS-80** mod I computer! Comes with Microsoft's **BASIC** in ROM. Built in cassette. 12" video monitor. Expandable to 48K.
Compatible to All **TRS-80 MOD I Programs.**
PMC 80 without monitor **$595.00**
RF—MOD for PMC to TV hookup **$39.95**
PMC-80 EXPANDER 100 SYSTEM..... **$644.00**
INCLUDES: 32K memory, S-100 bus, RS-232 interface, Parallel printer driver, Disk controller. Fully compatable with **TRSDOS, NEWDOS, VTOS,** and all other **TRS-80 Mod I disk software!**

APPLE II COMPUTERS 48K **$1299.00**
ATARI 400 ..... **$ 495.95**
ATARI 800 COMPUTER..... **$ 795.00**
ZENITH Z-89 48K, 1 DISK ALL IN ONE COMPUTER..... **$2495.00**

VIDEO MONITORS

LEEDEX 100 12' B/W MONITOR **$139.95**
SANYO 9' B/W MONITOR **$199.95**

PRINTERS

OKIDATA MICROLINE 80 All OKI'S have *TRS-80* Graphics!!! **$420.00**
Comes with friction and pin feed. upper/lower case, Graphics.
EPSON MX-80 PRINTER: Word Processing Quality Printout with Graphics!.....**Call**
NEC SPINWRITER with Tractor Feed ... **$2995.00**
DIABLO MODEL 1630 with Tractor **$2695.00**
UNIVERSAL PRINTER STANDS..... **$ 94.50**

Other Accessories:
SUP-R-MOD RF Modulator for APPLE... **$29.95**
ARCHBOLD SPEED-UP MOD FOR TRS MOD I. Allows up to 300% increase!..... **$45.00**
MICROSOFT BASIC Decoded and other mysteries **$29.95**
TRS-80 DISK and other mysteries **$18.95**
ZBASIC BASIC COMPILER for MOD I and MOD III TRS-80 and PMC-80 Increase basic program speeds by up to 200 times!!!!!
Tape ..... **$79.95** **Disk** **$89.95**

Both For Only $99.95 Specify MOD I or MOD III

WE HAVE HUNDREDS OF PROGRAMS FOR ALL THE POPULAR COMPUTERS! CALL FOR OUR FREE CATALOG

Personal and Business Checks take 3 weeks to clear. For fastest delivery use Certified Checks, Money Orders, Credit Card, or C.O.D.

We will try and beat any published price on any system! Call!

SIMUTEK COMPUTER PRODUCTS ™ ⌐386

4877 E. Speedway Blvd.
Tucson, Arizona 85712
(602) 323-9391 Technical Questions

CALL TOLL FREE TO ORDER

(800) 528-1149

Please mention this magazine when ordering
ARIZONA RESIDENTS ADD 6% SALES TAX.
WE TAKE VISA, MASTER CARD.

TRS-80 IS A TRADEMARK OF RADIO SHACK A TANDY CORP APPLE IS A TRADEMARK OF APPLE INC

finally—as a capping blow—Radio Shack. As one after another of the S-100 firms mismanaged themselves into oblivion, only the seriously dedicated microcomputer enthusiast remained involved with the S-100. Apple, which avoided the S-100, was still small during the early micro period, but now is in second place in sales. No firm in the top ten today is using the S-100. This has managed to kill off about 90 percent of the firms which were building S-100 compatible boards.

The S-100, which was cooked up in a few minutes one day by Ed Roberts, the president of Mits, and producer of the first microcomputer, left a lot to be desired. The basic idea was good—to build the computer using a large enough bus structure so any type of board could be plugged in to expand the system. The IEEE committee and George Morrow have since developed the bus to the point where today it is probably the single most practical bus structure for a genuinely flexible computer system. With shielding and other special techniques, it is even possible to keep the noise radiation of the bus down to FCC-acceptable limits.

With an S-100 system you can expand the uses of a computer system just about as much as you want. The CPU is on one board, the display generator often on another, memories on further boards, interfaces on others, and so on. Thus a system can be used for business with word processing, color graphics, disk control, music generation, control purposes, and so on, without having to plug in outside boxes for each new application.

Obviously, the cost of an S-100 system is going to be higher than the single board computers, but then IBM has never been a low-price outfit, and there is no reason to expect them to start now.



The Neeco exhibit was typical of the dealer support. Note the small kids, who were there in large numbers. They got a real kick out of the computers and picked up a lot of literature for their folks.

Programs

Most of the interest these days is in providing more business-oriented programs, for most of the popular systems. There is still an unlimited need for programs for publication by our magazines and books, as well as by Instant Software. Remember one thing—if your program runs in one of the magazines we *don't* publish, we can't consider it for Instant Software, and you *could* lose a fortune.

What programs are needed? Of particular interest are programs for helping specific types of businesses. For instance, small towns need a program to help them keep track of their voters, land owners, taxes, assessments and so on. Printers need programs to help them estimate print jobs. Virtually every type of business can be helped by specialized computer programs, which can then be sold by Instant Software.

General programs, such as inventory, are important, too. These come in a wide variety of shapes and sizes, each geared to special needs. Some of these variables can be handled in the initializing of the program if you build in the flexibility, while others will just have to be geared for certain applications. I suspect that we will end up with perhaps a dozen or two inventory programs that are stocked by stores, each with different ways of handling things. It is useful to remember to put routines in your programs that will enable data to be accessed by other programs when needed, such as for totaling inventory assets.

Games are not very important right now. Good adventure games are selling and will be considered for publication. Most computerized versions of board games have declined in sales. Utilities are good sellers, as are diagnostics.

Educational programs are getting started, but no one knows yet where they are going. It would seem reasonable that programs which can replace tutors would help sell systems. Many of these are drill programs in math, languages and so on. Educators with a programming bent might see what they can do.

If you're not into original programming, perhaps you'd like to try your hand at conversions. Programs for the TRS-80 can be converted to run on most other systems, though the graphics can be tricky at times. If you want to have at this, let us know what system you'd like to tackle. We have over 1000 programs accepted for publication, most of which can be made to run on at least a half-dozen popular systems. □



Sure, Instant Software had a booth. Reese Fowler, the head of software procurement for Instant Software, is answering questions, while Sherry, on the right, shows copies of Microcomputing.

By Robert W. Baker

8032 Data Handlers

Database Programs Reviewed

OZZ, the Information Wizard

OZZ is a general-purpose database program. Designed specifically for the 8032 CBM with an 8050 disk, it was written by the Bristol Software Factory and is being sold through Commodore. It's written entirely in machine language, and is thus very fast, though dependent on the CBM ROMs. It's not quite as powerful or flexible as Jinsam, but it does have several very nice features all its own.

OZZ requires a matched set of diskettes to maintain up to ten data files, depending on the size of the files. To conserve space, each data file only uses as much space as necessary and can be extended at any time. The maximum size of any one data file is 364K with a single 8050 disk unit (two diskettes). The maximum number of records within any one data file is 64,000 records. For each data file created, there's about a 68.8K overhead: 60K for a printed document format, 7.8K for a calculator program and 1K for file management.

One of the nicest features of OZZ is the way the data file format is defined. A special editor allows you to effectively draw a picture of how you want each data record to look. You simply define boxes to contain the information along with headings, titles, comments, etc. Each box also defines the data type (text or numeric) and the length of the field. For numeric fields you can even define the exact decimal position within the field. You have complete freedom in defining the format; everything is placed wherever desired on the CBM display. However, the maximum total length for all fields in the record cannot exceed 252.

The first text field defined within the record is always used as the key field. This is used whenever you want to access a particular record by name. This fact is very important and must be kept in mind when first creating a data file. The key field must be something that will be unique for every entry in the data file. Also, once entered, this field should not be changed at any time.

Once you've defined the file format, it can be saved on the disk as a named file. The name is then used to later reference a particular data file, and any subsequent commands will refer to that file until another is selected.

Adding or editing records is easy. The file format is displayed on the screen and the cursor appears in the first box. If you're editing a record, the existing data is also displayed within each field. All you do now is position the cursor and fill in or change the boxes. Normal, full-screen editing is provided so you can easily correct mistakes and make appropriate changes.

Several methods of retrieving information are provided to handle your varying demands. You can find records by the key field, asking for a record by its name. For convenience, you can use an asterisk (*) for abbreviated names with character matching. You can also specify a particular record number within the data file, or even perform a sequential search both forwards or backwards. More powerful searching allows you to specify particular pieces of information within a record you want to find.

> The current OZZ package from Commodore is a well-documented and very useful product.

Another powerful feature of OZZ is a built-in calculator. It lets you make calculations based on information in the data files. The calculator can be operated under direct control or can be programmed to perform a number of calculations successively. Numeric fields of the data records are referenced by their associated labels.

The calculator memory can contain an additional 16 newly defined working variables if required. The calculator is accurate to 14 significant places for addition, subtraction, multiplication, division and percentage calculations. The results of any calculation can be posted into the data record, displayed or saved on the calculator memory. When programming the calculator, up to 16 calculation steps can be entered in any one calculator program. For added convenience, calculator programs can be saved on disk as named files for later recall.

For printed output, OZZ has a document editor that's used to define how printed documents are to be generated and what they contain. This editor is much like the one used to define the data file format. It allows you to draw the layout of the document on the computer screen, defining fields, labels, headers, footers, etc. You can even insert breakpoints in the format that tell OZZ when to stop printing and get new information from the data file. As expected, the document formats can also be saved on disk as named files for later recall.

Combining the many features of OZZ, you can easily list a data file in a specific document format while performing calculations defined by a calculator program. Optionally the data records can also be updated. Another feature allows selectively listing a data file depending on an analysis mask. Any number of criteria can be set in the mask to list only the exact records desired.

There are several other functions provided that allow deleting records, printing whatever is currently displayed on the screen, or even verifying the database. You can also display a list of all data files, showing the record length and

THE MOST INCREDIBLE LITTLE WORKER NEXT TO YOUR SECRETARY CAN SIT RIGHT NEXT TO YOUR SECRETARY.



The Zenith Z89 sub-compact: a dual Z80 microcomputer, a video terminal, and a floppy-disk drive . . . all in a single, desktop stand-alone.

The Z89: a subcompact microcomputer that needs about as much space on a desk as a portable TV set.

And needs about as much technical training to operate. Because the Z89 uses the industry-standard CP/M ™ operating system, it accepts a vast variety of existing software. Most microcomputer programmers already know it, and anyone trained on larger systems adapts to CP/M* in a flash. The Z89 also uses standard, currently available software on both 5¼" and 8" floppy disks, yet is capable of more sophisticated operation using extended languages such as Microsoft BASIC, COBOL, FORTRAN, and PASCAL.

The keyboard follows the standard typewriter format, with every touch of a key confirmed by an audible click. Numbers are duplicated in calculator format, with up to 18 decimal-place accuracy. And the large-capacity non-glare video display is easy on the eyes.

The Z89 is a sub-compact desktop unit with a memory of up to 64K bytes of RAM—more than enough for word processing, accounts payable, accounts receivable, inventory control, and many other business, scientific, and technical applications . . . without a zillion different cords hanging out of the back.

And now, for you tech-spec freaks, some important jargon regarding standardization and flexibility:

Disk data: Choice of internal or external storage, or combination; 100K to 2.5 megabytes. 5¼" flexible drives (standard 10-sector hard-sector media, single-side single-density) for lowest media cost. 8" disk drives (double-side double-density) for greater storage; also standard IBM single-side single-density format for exchanging data with other computer systems. Available in either 48K or 64K systems.

Zenith is a boot-loaded RAM system, so it can accommodate the latest software on the market, and anything new that's likely to come along in the future. Twin serial input/output ports let you interface with just about any printer or modem on the market—handy whether you already have them now, or want to add them in the future. And with five different Zenith models, from a basic 48K no-disk-drive, to built-in 5¼" or 8" single or double disc drives, you can put together 18 different configurations . . . which means you can design a system to fit your exact job, rather than force your job to fit a system. In other words, the Z89's capabilities make the microcomputers with the cute names look like toys

Service? Available just about everywhere.

The Zenith Z89 . . . a highly reliable, highly affordable, state-of-the art microcomputer for the state of your business—whatever its size.

For the name of your nearest dealer, give us a call.

LEADING EDGE.™ ✓355

Leading Edge Products, Inc., 225 Turnpike Street, Canton, Massachusetts 02021.

1-800-343-6833.

In Massachusetts, call collect (617) 828-8150. Telex 951-624.

DEALERS: For immediate delivery from our Inventory Bank,™ and some of the most attractive margins in the industry, call toll-free.

✓See List of Advertisers on page 194

number of records in each data file.

The current OZZ package from Commodore is a well-documented and very useful product. However, it lacks several features that could make it much more powerful and certainly more flexible. The biggest problem is the lack of provisions for changing a record format. If you wanted to later change the format of a data file, you'd have to create an entirely new data file and reenter the entire database.

Also, there's no way to interface a data file with other programs like Word Pro or VisiCalc. In fact, there's no mention of the file formats in the documentation that would allow you to create your own interface. Lastly, there's no way to define additional sort keys or to extract a subportion of an existing data file.

Commodore has mentioned that future additions and enhancements are planned to correct some of these shortcomings. There may even be a few related utility programs provided, rather than incorporating a number of new features within OZZ itself. Even so, OZZ is still a very useful and potentially powerful program.

Create-A-Base

Create-A-Base is another high-quality, versatile database program, this one coming from Micro Computer Industries (1520 East Mulberry, Suite 170, Fort Collins, CO 80524). The program was designed to be simple and easy to use, and really lives up to this claim. The user is prompted through all functions with a friendly question and answer dialogue. Owners of older CBM/PET systems are out of luck, however, since Create-A-Base only works on the 8032 CBM with a 4040 or 8050 disk drive.

On the other hand, the program will operate correctly with a number of different printers: CBM, NEC Spinwriter, Tally 8024 or any ASCII printer. Math functions are also included so the program can be used to set up inventory, accounts receivable and other common bookkeeping operations.

The program comes with an extensive 65-page manual, divided into four basic sections. The first section gives basic information on preparing your system to use Create-A-Base. The second section contains simplified lessons to give the beginning user hands-on experience in using the many features provided. After working through the lessons you should have a very good idea of how to use the program for your particular applications. The third section gives a brief explanation of each command, including the special command functions. The last section is really an appendix, containing technical data, a list of two-letter state abbreviations and information in case you should run into difficulties with the program.

The Create-A-Base program modules are written in BASIC and require a special ROM installed in the usually empty UD12 socket of the 8032. This socket is the last empty socket toward the rear of the main logic board. The Word Pro 4 ROM normally goes in the UD11 socket just in front of UD12. Unfortunately, the UD12 socket is also used by the VisiCalc ROM. Complete instructions are included for installing the ROM; just follow normal precautions for handling MOS devices.

When first loaded, Create-A-Base lets you select whether or not you want sound, and the type of printer being used.

However, it does not let you specify the printer address in case it is not device #4 on the IEEE bus. The program then requests the data file name to be created or used. You can, if desired, enter a special command at this point to display the disk directory, sort a database or create a Word Pro formatted file. When a file name is specified, the main command selection menu is displayed and the program waits for further input.

When first creating a data file, you have a choice between two major structures. One allows up to 24 fields or 220 characters per record with 650 records maximum. The other allows up to 12 fields or 105 characters but 999 records maximum. Thus, you must choose between having maximum characters and minimum records, or minimum characters and maximum records. There is no in-between with Create-A-Base.

As with other database programs, Create-A-Base has many commands for adding, editing, listing or deleting records. You can also rename fields within records or even add new fields to existing data files. Other functions allow you to easily merge or transfer data files. A separate sort module allows sorting on any one field or a pair of fields. You can recall records by record number or a sort key field.

Output can be in a standard format or user-defined formats. A number of parameters are selectable to design the output however desired. The program can save up to nine different formats for each data file. You can even do calculations with totals, enter headings, print by a select code, format numbers as dollar and cents or integers, etc. For mailing labels there are three predefined formats in the most commonly used layouts.

Other special commands allow merging, transferring and scratching files. You can merge different data files or even transfer files from a 2040 disk to an 8050 or 4040 disk. There's even a method of reading sequential files to develop files that can be manipulated by Create-A-Base.

Other nice features include the ability to create input files for Word Pro 4 and being able to display the disk directories. The list of features and commands is rather extensive; you really have to play with the program to see all that it can do.

After trying Create-A-Base for a few weeks, I found it to be a very fine product and nicely documented. It provides a host of features, many of which can be very handy at times. The program is easy to use and data entry is very straightforward. Create-A-Base may not be quite as fast or powerful as Jinsam, but for small-scale users it just might be very attractive depending on your needs.

As more and more high-quality software packages such as Create-A-Base, OZZ and Jinsam become available, choosing what is best for a certain user with a particular application gets harder and harder. If at all possible, try to see a local dealer and experiment with various software packages before running out to buy. Many of the better-quality products are being displayed at the various Commodore shows across the country. Attending various computer shows also gives you an excellent opportunity to try different software packages, sometimes side by side for easy comparison.

A New Product For an Old PET

Optimized Data Systems has an adapter for the old style 8K PET that allows the use of industry standard 2114 1K-by-4 RAMs as a replacement for defective 22-pin 6550 memory chips. The 2114

What kind of person reads the "OLCTD"?

So far, our subscribers include medical doctors, a few printing companies, Data Processing executives, and lots of just plain folks like you who enjoy the fascinating world of hobbiest information retrieval and exchange via the telephone. That is what "The On-Line Computer Telephone Directory" is all about. Useful data, not egotistical hype, is what we offer to our readers. They appreciate it -- and you will too.

Almost as spectacular as Artesian New Year...

The On-Line Computer Telephone Directory celebrates one year of publication with a double-sized edition featuring articles describing the user operation of hobbiest bulletin board systems like ABBS, CBBS, Message-80, Remote NorthStar, NetWork and FORUM-80. Also featured -- "The Compleat RS-232 Primer" and a reprint of "ASCII Control Codes Explained". All this along with the usual 200-plus list of computer Bulletin Board Numbers! Join the celebration and subcribe today!

The On-Line Computer Telephone Directory ↙356

To subscribe to the OLCTD (a quarterly publication) send $9.95 (for one year) or $15.95 (for two years) to:

OLCTD, P.O. Box 10005
Kansas City, MO 64111
MasterCard / VISA accepted

Please include your card number, expiration date and signature with your charge order.

memory chips are much less expensive and more readily available than the 6550, typically selling for as little as one third the cost of a 6550.

The PH-001 RAM adapter is a small, 4.25 by 2.7 inch, double-sided printed circuit board that normally plugs into the 6550 sockets on the PET main logic board. It provides space for up to eight 2114s (4K). If more than eight 6550s require replacement, a second adapter can be used. Even though the adapter uses two 6550 sockets for connection, both 6550 ICs can still be installed in sockets on the adapter. Therefore, the adapter can be installed prior to any 6550 failure and be ready for use when one does occur. For each 6550 failure, one 2114 is installed on the adapter. Low-power 2114s (2114L) with an access time of 450 ns or faster should be used.

Both the 2114 and 6550 are 1K by four-bit static NMOS memory devices. The primary differences between them are in pin configurations and the use of an internal 1K chip select decoder in the 6550. The PH-001 adapter board uses a 74LS139 dual decoder to provide the necessary 1K chip selects as well as a valid write strobe for all 2114s on the board. There is a one-to-one correspondence between 6550 address and data lines and those in the 2114s. Therefore, any memory diagnostic programs you use that refer to memory locations or bits will still correspond properly to the 2114 locations.

In addition to replacing defective 6550s, the PH-001 adapter can be used as a low-cost 4K byte memory expansion for the PET. This requires constructing a cable between the PH-001 wire-wrap sockets and the PET memory expansion connector. Directions are included in the user instructions supplied with the adapter board, telling how to make the proper connections. By merely plugging a second adapter into the first one, a total of 8K can be easily added. Another section of the user instructions even tells how the adapter can be used for screen RAM replacement if necessary. This also requires building a simple interface cable, for which instructions are given.

The PH-001 adapter board is available in several versions to suit your budget—bare board, complete parts kits, or fully assembled. Prices range between about $9 and $25, while postage and handling are extra. Overall, it's a nicely made, high-quality package that's priced just right.

For more information and latest pricing on the RAM adapter or various PET programs also available, write Optimized Data Systems, PO Box 595, Placentia, CA 92670.

Food for Thought

I've come up with a little programming idea in the last few weeks that I think has great potential. Unfortunately, I really haven't had time to explore it further, so I thought I'd at least briefly tell what I've been thinking about. Maybe someone out there can come up with a real-life use for this, or expand upon the original idea.

We all know the problems caused by the various ROM sets that may exist in any given PET/CBM system. The problems get even worse when writing assembly-language programs, since they tend to interface directly with the ROM routines or low memory pointers.

My idea is simple. Suppose you're writing an assembly-language program but you intend to use disk files, perform intricate calculations or do something that would normally be quite easy in BASIC. If you try to do this same function in assembly language, it could get complicated. If you decide to take advantage of the existing ROM routines, then you'd normally be locked to a particular ROM version. Any changes in the ROMs would require a reassembly, or at least a few patches to the original program. However, there may be an easy way to avoid all this.

Why not write your main program in assembly language as planned, but return to BASIC to do special functions? This is just the opposite of the common practice of using short assembly-language routines within a main BASIC program. You can use predetermined areas of memory to pass parameters between your main assembly-language program and your BASIC subroutines. One byte could be used to indicate a desired function to be performed, while additional pointers and counters could be used to pass strings or numeric values.

The whole thing works like this:

You change the top of memory pointer to reserve an area for the machine-language program while leaving sufficient memory for the simple BASIC program. The first line of the BASIC program is an SYS command that branches to the first instruction of the assembly-language program.

Now your assembly-language program executes and goes about its business until it needs a function from the BASIC subroutines. It first sets a flag byte to indicate the number of the function to be performed, then sets any parameters needed by the subroutine in predetermined areas of memory. The program then sets a continue address and returns to BASIC via a 6502 RTS instruction (op code $60).

The PET will now fetch the next BASIC statement after the SYS command that originally passed control to the assembly-language program. All the BASIC program has to do now is read the flag byte via a PEEK instruction and branch to the indicated subroutine based on the number read. This can easily be done with a simple ON X GOSUB 100,200,300,. . . statement.

The selected subroutine then gets the

NO ONE CAN MAKE A TRS-80 WORK THE WAY SNAPP CAN!

SNAPP II EXTENDED BASIC A family of enhancements to the Model II BASIC interpreter. Part of the package originated with the best of APPARAT, INC.'s thoughts in implementing NEWDOS BASIC. The system is written entirely in machine language for SUPER FAST execution. The extensions are fully integrated into Model II BASIC, and require NO user Memory, and NO user disk space. The package is made up of the following six modules.

XBASIC—Six single key stroke commands to list the first, last, previous, next, or current program line, or to edit the current line. Includes quick way to recover BASIC program following a NEW or system or accidental re-boot. Ten single character abbreviations for frequently used commands: AUTO, CLS, DELETE, EDIT, KILL, LIST, MERGE, NEW, LLIST and SYSTEM.

XREF—A powerful cross-reference facility with output to display and/or printer. Trace a variable through the code. Determine easily if a variable is in use.

XDUMP—Permits the programmer to display and/or print the value of any or all program variables. Identifies the variable type for all variables. Each element of any array is listed separately.

XRENUM—An enhanced program line renumbering facility which allows specification of an upper limit of the block of lines to be renumbered, supports relocation of renumbered blocks of code, and supports duplication of blocks of code.


XFIND—A cross reference facility for key words and character strings, also includes global replacement of keywords.

XCOMPRESS—Compress your BASIC programs to an absolute minimum. Removes extraneous information; merge lines; even deletes statements which could not be executed. Typically saves 30-40% space even for programs without REM statements! Also results in 7-10% improvement in execution speed.

ENTIRE Pkg for Model II $200
ENTIRE Pkg for Model III $125

8160 Corporate Park Dr.
Cincinnati, Ohio 45242

Call Toll Free
1 - 800 - 543-4628
Ohio residents
call collect (513) 891-4496



All products now available to run with TRSDOS 2.0.
TRS-80 is a trademark of the Radio Shack division of Tandy Corporation

SPECIALSPECIAL**
TRS-80 ADD ON DRIVES
IMMEDIATE DELIVERY

SINGLE SIDED $225.00
DOUBLE SIDED $345.00

COMPLETE SYSTEMS
SINGLE SIDED $365.00
DOUBLE SIDED $485.00
INCLUDES:
MINI DISK DRIVE
FUSED POWER SUPPLY
VENTED CABINET
CABLE
90 DAY WARRANTY
FACTORY ASSEMBLED
FACTORY TESTED

THESE ARE NEW 5" FD's

I2 INTERFACE, INC ✓151
20932 CANTARA ST
CANOGA PARK, CA 91304
(213) 341-7914
VISA AND MASTER CHARGE ACCEPTED

$$$ DISCOUNT PRICES $$$

SCOTCH DISKETTES
for Apple*, Pet & TRS80
32% less abrasive than the industry average.
Box of 10 - Soft Sector - 5¼ inch* $28.95
Scotch Disk Drive Cleaning Kit $22.95
Add $1.00 shipping for each box/kit
*Free set of 3M instructional programs (high res. demonstration) with order on request.

APPLE II SOFTWARE
(Available only with purchase of diskettes)
Typing Teacher (teaches touch typing)* $4.00
Math Sequences (gives hints - builds IQ)** $2.00
Unicopy (copy diskette using 1 drive)** $2.00
All three programs $7.00
*Integer Basic **Applesoft

APPLE II SOFTWARE/HARDWARE
(With or without purchase of diskettes)
Back•It•Up
(use to backup most protected diskettes) $54.00
Apple Brain Surgeon
(diagnoses RAM, ROM, Disk drives, Micromodem II, & more) $38.00
Home Money Minder
(checks, charges, budget & high res graphics) $31.00
Super Text II or Visicalc
(two of the most professional programs) $125.00
MicroTech Lower Case Adaptor
(for Revision 7 - Dan Paymar compatible) $34.95
Shipping & insurance for 1 or more items $2.00

EPSON MX 80 PRINTER
(80 Chars/sec.-9x9 dot matrix-letter quality)
Apple II (with interface and cable) $579.00
Pet (with IEEE interface and cable) $565.00
TRS-80 (with cable) $509.00
Shipping and insurance for MX80 $10.00
Friction Feed Adaptor Kit (with shipping) $49.00
Add to above for new MX80FT model $95.00

Visa and Mastercard accepted.
Michigan residents add sales tax.

THE COMPUTER ANSWER
P.O. Box 573 K ✓58
Birmingham, Michigan 48009
(313) 642-4338 (Order Phone — 24 hours/day)

required parameters from a known area of memory via PEEK statements. After completing the desired function the return parameters are placed back in memory with appropriate POKE statements. An additional status byte might be set to indicate successful completion or an error. The BASIC subroutine then returns to the next statement after the ON X GOSUB . . . statement.

Two PEEK commands get the desired continue address, and an SYS to that address returns to the calling assembly-language program. A GOTO statement should follow the last SYS command to take the BASIC program back to the PEEKs and ON X GOSUB . . . statements to repeat the whole process the next time a BASIC subroutine is called.

Therefore, the simple BASIC program might look like:

```
10 SYS(.....)
20 X=PEEK(.....)
30 ON X GOSUB 100,200,300,...
40 X=PEEK(...)
50 X=X+(256•PEEK(...))
60 SYS(X):GOTO 20

100 REM SUBROUTINE—FUNCTION #1
    .
    .
    .
190 RETURN

200 REM SUBROUTINE—FUNCTION #2
    .
    .
    .
290 RETURN
```

With this simple structure, you can easily perform a string of calculations, open or close a disk file, read or write data records or whatever else desired. You don't have to worry about what happens to the ROMs, since you're using the standard BASIC interface to the ROM routines.

Also, you don't have to be concerned with the pointers in low memory since BASIC takes care of them. However, you are losing some speed by relying on BASIC to do part of your work for you. On the other hand, if you don't quite understand how to do certain functions in assembly language, this method gives you an easier way to handle difficult problems.

Somehow this whole idea seems useful, but I haven't found a place to use it yet. If anyone comes up with additional ideas or a real-life application, I'd be more than happy to hear from you.

Miscellaneous

Commodore's newsletter is finally back in print, but under a new name. *Interface* will be published six times a year and should appear on a regular basis, since they now have a full-time editor. Subscriptions are $15 for six issues and inquiries should be addressed to: Commodore Business Machines, Inc., Attn: Editor, *Commodore Interface*, 681 Moore Road, King of Prussia, PA 19406.

Eastern House Software, authors of the MAE assembler, are now publishing their own *EHS Gazette*. It contains programming hints, updates and notes on their products, information on various new products, and, of course, advertising for items sold by EHS. Information contained in the *Gazette* can be copied and reproduced. The *EHS Gazette* is free to anyone sending an SASE with appropriate postage to: *EHS Gazette* c/o Eastern House Software, 3239 Linda Drive, Winston-Salem, NC 27106.

Philip Chao of Rochester, NY, is trying to organize a program exchange between various PET user groups. He has written most user groups explaining his ideas of creating a disk library for the PET. Any user group that contributes to the library will have access to anything currently in the library for simply the cost of disks and postage. To help keep the work load to a minimum, the disk library will only be available to user groups, and not to individuals. Also, only entire disks will be copied; individual programs will not be provided.

If your group is interested and hasn't been contacted, write Philip W. Chao, Strong Memorial Hospital, PO Box 387, Rochester, NY 14642. When submitting programs for the library, please keep in mind that you should include only original software generated by members of the group. Programs from magazine articles should not be included unless specifically stated that they are in the public domain. If you read the masthead in *Compute* magazine, you'll find that any program published remains the property of the original author. Besides, it makes sense not to submit magazine programs. If everyone submitted a copy of the same program, you'd only be wasting time and valuable disk space. If in doubt about the true origins of any program, don't distribute it.

For those that haven't heard, Commodore has a 64K memory expansion for the 8032 system. This gives you a 96K CBM system, but BASIC can still only use 32K. Details on the new expansion board haven't been released as yet but should be out by the time this appears.

For owners of all model CBMs, Spima Computer of West Germany is offering a line of 64K memory expansion units. From the photographs, it appears to be a nicely made separate box that sits next to the CBM with an interconnecting ribbon cable. Unfortunately, the information included was all in German. For more information you can write: Spima Computer GMBH, Turbinenstrasse 4, 6800 Mannheim 31, West Germany.□

Address correspondence to Robert W. Baker, 15 Windsor Drive, Atco, NJ 08004.

Star Warrior: Slay the Dictator and Save the Civilized People



You owe yourself some fun time and you have just loaded the new **Star Warrior** into your computer. Suddenly, you are one of the Furies ...and retribution is your business.

The Interstellar Union of Civilized People has been annexed by a soul-crushing dictatorship. You have been given the mission to assassinate the military governor and then destroy the installation. That's Scenario 2.

In Scenario 1, you are on a diversionary mission for the assassination attempt. You want to do as much damage to the enemy units as possible.

The terrain is dangerous and difficult; the enemy forces are powerful and varied. (You both in the same general area...but, on the other hand, the enemy may not see you either.) There is always the chance of an attack by an invisible enemy.

There are two scenarios and five levels of difficulty...level five is almost impossible to win. There are usually no fixed playing times for Scenario 2; you play until you get the governor and escape or until you are killed. But you can even set a fixed playing time in Scenario 1.

You have the choice of suits and equipment, and of movement, combat and special commands.

In other words, like all EPYX games, there are enough variations in the game so that you will never tire of playing. Each game is different and fresh. You will never get bored playing the game. Not in your computer's lifetime. Or even your computer.

Star Warrior. Another bug-free, fantastic game from EPYX. With the unique **EPYX lifetime warranty:** If anything happens to your cassette or disk at any time and for any reason, send it back with just $5.00 for shipping and handling and we will send you a brand new one.

(Of course, there is also our 30-day unconditional guarantee: if your EPYX game has any defect whatsoever within 30 days of purchase, return it to us or your dealer and we will replace it free. No questions asked.)

Visit your dealer now and pick up **Star Warrior** in its good-looking, protective box with one of the best instruction books you ever read. Now available on disk for the Apple II (48K RAM with Applesoft) and Radio Shack's TRS-80 (Level II, 16K) and on cassette for the TRS-80 (32K RAM). And on cassette for the Atari (32K). **Only $39.95 on disk or cassette.**

If your dealer is out of stock and you can't wait, order directly from Automated Simulations. **$39.95** plus $2.00 for shipping and handling (and sales tax if you are in California).

We guarantee you will be delighted with **Star Warrior.** (If it is not exactly what you want, return it to us for full refund. Again, no questions asked.)

Enclose your check. Or if you order by Visa or MasterCard, use our toll-free phones: In the United States: operator 861 **(800) 824-7888;** In California: operator 861 **(800) 852-7777;** In Hawaii and Alaska: operator 861 **(800) 824-7919.**

Order today. You and your computer deserve the fun.

AUTOMATED SIMULATIONS, INC.
Dept. SW7, P.O. Box 4247
1988 Leghorn Street
Mountain View, CA 94040



COMPUTER GAMES THINKERS PLAY

EPYX

-55

By Frank J. Derfler, Jr.

Novation Unveils New Modem Line

Apple-Cat II, Modem Terms Explained

This month I'm going to get into some modem terminology. You won't need this information often, but when you do, you might not find it anywhere else. I'll also take a look at an exciting new versatile product, the Novation Apple-Cat II.

Apple-Cat II

Novation has developed an LSI technology modem module which will become the basis of a whole new family of microcomputer modems. The first product to use this modem module is the Apple-Cat II. Novation carefully gives Apple computers the credit for the Apple name, but Apple shouldn't mind, because the Apple-Cat II gives the Apple II great new communications capabilities.

The Apple-Cat II modem has two strong points: flexibility and total package integration. The integrated system comes ready to plug in. It has all the needed cables and interfaces and a powerful smart terminal software package on disk.

The flexibility of the system is outstanding. It will not only provide full Bell 103 standard 300 baud capability, but it will also operate at 1200 baud using the Bell 202 transmission standard. (See the following information on modem terms.) It has an option that will allow the modem device to operate as a 45.5 baud, Murray/Baudot coded, Weitbrecht modem for the use of the deaf community. That feature means that a deaf user can use ASCII signals for access to information utilities such as The Source or CompuServe and still communicate with users of older TTY equipment. (The change of mode is not quick; it may require a ROM replacement.)

Telephone operations can be controlled from the keyboard or from software. The system will auto dial using either pulse or dual-tone dialing, will redial calls and will auto disconnect. The Apple-Cat II can be told to listen for a second dial tone before dialing additional numbers in case you are using a system where you have to reach an outside line. (Almost all other dialing modems simply wait a few seconds and assume they received the second dial tone. This can often be a false assumption.) An optional module provides jacks so you can attach a telephone handset (not provided) and have a complete integrated voice or data installation—you can even hang the handset on a special "cradle" on the side of the Apple II.

Another modem system option will decode the tones from push-button phones so you can command your system from long distance even without a terminal. Jacks are provided for control of a tape recorder motor by the modem and for audio output to the recorder. Finally, the software to integrate the Apple-Cat II with a BSR X-10 remote control transmitter is optionally available on ROM.

The combination of all of that software, tone decoding and remote controlling capability should challenge the imagination of any microcomputer user.

The communications software (dubbed Comm-Ware by Novation) provides many features. It will save data in files, transmit either binary or text files, and allow off-line message preparation. It will transmit word processor files if they are standard ASCII. The only soft spot in the software I found is that it will not do prompted transmission. Systems like the ABBS, PMS and CompuServe want the transmission software to send message inputs a line at a time. They want to prompt each line with a character, such as a greater-than sign or question mark.



This Novation modem module is about the size of a deck of cards. It will be the heart of a whole new line of modem products for microcomputers.

The Comm-Ware program does provide for variable rate transmission. If you set this speed properly, you can match the prompt rate of most systems, but you usually transmit more slowly than you need to or miss an occasional character. This is particularly true when CompuServe's EMAIL sends a new top-of-page header. It expects you to wait when it does this. Aside from the lack of prompted transmission, the Comm-Ware program provides for a very intelligent terminal capability. (At publication time, Novation says they are upgrading the software for prompted transmission.)

Most terminal functions may be performed at 1200 baud using the Bell 202 signaling format, but a special Comm-Ware feature makes use of the 1200 baud mode to send files to another Apple-Cat II system. The system uses a unique protocol, but it does open great possibilities for the transfer of messages between message systems and between individual Apple-Cat II users.

Also, remember that the Novation modem module which is the heart of the Apple-Cat II will soon show up in modems for other microcomputers. These systems should also be able to use the 1200-baud file transfer program.

The program runs from a helpful menu and has other nice features, such as a status line which shows the transmission parameters selected, program features activated, and free memory available; di-

Address correspondence to Frank J. Derfler, Jr., PO Box 691, Herndon, VA 22070.



TYPE-'N-TALK™ IS T.N.T.

The exciting text-to-speech synthesizer that has every computer talking.

- ***Unlimited vocabulary***
- **Built-in text-to-speech algorithm**
- **70 to 100 bits-per-second speech synthesizer**

Type-'N-Talk,™ an important technological advance from Votrax, enables your computer to talk to you simply and clearly — with an unlimited vocabulary. You can enjoy the many features of Type-'N-Talk,™ the new text-to-speech synthesizer, for just $375.00.

You operate Type-'N-Talk™ by simply typing English text and a talk command. Your typewritten words are automatically translated into electronic speech by the system's microprocessor-based text-to-speech algorithm.

The endless uses of speech synthesis.

Type-'N-Talk™ adds a whole new world of speaking roles to your computer. You can program verbal reminders to prompt you through a complex routine and make your computer announce events. In teaching, the computer with Type-'N-Talk™ can actually tell students when they're right or wrong — even praise a correct answer. And of course, Type-'N-Talk™ is great fun for computer games. Your games come to life with spoken threats of danger, reminders, and praise. Now all computers can speak. Make yours one of the first.

Text-to-speech is easy.

English text is automatically translated into electronically synthesized speech with Type-'N-Talk.™ ASCII code from your computer's keyboard is fed to Type-'N-Talk™ through an RS 232C interface to generate synthesized speech.

Just enter English text and hear the verbal response (electronic speech) through your audio loud speaker. For example: simply type the ASCII characters representing "h-e-l-l-o" to generate the spoken word "hello."

TYPE-'N-TALK™ has its own memory.

Type-'N-Talk™ has its own built-in microprocessor and a 750 character buffer to hold the words you've typed. Even the smallest computer can execute programs and speak simultaneously. Type-'N-Talk™ doesn't have to use your host computer's memory, or tie it up with time-consuming text translation.

Data switching capability allows for ONLINE usage.

Place Type-'N-Talk™ between a computer or modem and a terminal. Type-'N-Talk™ can speak all data sent to the terminal while online with a computer. Information randomly accessed from a data base can be verbalized. Using the Type-'N-Talk™ data switching capability, the unit can be "de-selected" while data is sent to the terminal and vice-versa — permitting speech and visual data to be independently sent on a single data channel.

Selectable features make interfacing versatile.

Type-'N-Talk™ can be interfaced in several ways using special control characters. Connect it directly to a computer's serial interface. Then a terminal, line printer, or additional Type-'N-Talk™ units can be connected to the first Type-'N-Talk,™ eliminating the need for additional RS-232C ports on your computer.

Using unit assignment codes, multiple Type-'N-Talk™ units can be daisy-chained. Unit addressing codes allow independent control of Type-'N-Talk™ units and your printer.

Look what you get for $375.00. TYPE-'N-TALK™ comes with:

- Text-to-speech algorithm
- A one-watt audio amplifier
- SC-01 speech synthesizer chip (data rate: 70 to 100 bits per second)
- 750 character buffer
- Data switching capability
- Selectable data modes for versatile interfacing
- Baud rate (75-9600)
- Data echo of ASCII characters
- Phoneme access modes
- RS 232C interface
- Complete programming and installation instructions

The Votrax Type-'N-Talk™ is one of the easiest-to-program speech synthesizers on the market. It uses the least amount of memory and it gives you the most flexible vocabulary available anywhere.

Order now. Toll free.

Call the toll-free number below to order or request additional information. MasterCard or Visa accepted. Charge to your credit card or send a check for $375.00 plus $4.00 delivery. Add 4% sales tax in Michigan.

1-800-521-1350.

Votrax ✓200

Distributed by Vodex
A Votrax Company — Dept. RT
500 Stephenson Highway, Troy, MI 48084
(313) 588-0341

Type-'N-Talk™ is covered by a limited warranty. Write Votrax for a free copy.

Lowest Prices on Personal Computers

ATARI 800™. . .$789

ATARI List $1080



ATARI® 400. . . $359

HEWLETT PACKARD HP-85



$2795

HP-85 Accessories

5¼" Dual Master Disc Drive List $2500. . . . . $2125
5¼" Single Master Disc Drive List $1500. . . $1275
HP 7225A Graphics Plotter List $2050. . . . . $1845
HP-85 16K Memory Module List $395. . . . . $355
HP-85 Application Pacs Standard List $95. . . . $85
Serial (RS-232C) Interface Module List $395. . $355
GPIO Interface Module List $495. . . . . $445

new HP-83 List $2250 **$1895**

NEW! **HP-41CV** with five times more memory **built in.** List $325 **$249**



HP-41C List $250 **$199**

HP-32E Scientific w/Statistics — 53.95
HP-33C Scientific Programmable $79.95
HP-34C Advanced Scientific Programmable — 123.95
HP-37E Business Calculator — $49.95

Personal Computer Systems 303

609 Butternut Street
Syracuse, N.Y. 13208
(315) 475-6800

Prices do not include shipping by UPS. All prices and offers subject to change without notice.

rect entry of DOS commands; a self-test feature which loops back the modem internally; extensive self-customizing to match various printer and external device options; utilities to convert between integer, BASIC and binary files; and a "Hello" program which greets people dialing-in and allows them to leave messages in RAM.

Other communications software designed for integrated modems probably will not yet work with the Apple-Cat II. I understand that Bill Blue and other Apple communications software types have been contacted by Novation, and I expect to see compatible versions of various popular programs, including those in Pascal and CP/M, available soon.

The basic Apple-Cat II sells for about $390 and requires a 48K Apple II or Apple II Plus with a single disk drive and 3.2, 3.2.1, or 3.3 Apple Disk Operating System. The Apple-Cat II hardware includes a full duplex serial port with full handshaking for a printer, so you could eliminate that cost if you need that kind of printer interface. It is a well-designed product aimed at the Apple II owner who wants the ultimate in system flexibility. It isn't low-priced. If you get all of the accessories (tone decoders, ROMs, etc.), the system can cost over $650, but it has integrated capabilites found nowhere else at this time.

Now, let's take a closer look at some modem terms, particularly the Bell 202 standard used by the Apple-Cat II.


Modem Terminology

If you intend to buy a modem soon (and every reader of this column should have at least one by now!), you may be faced with a new decision. Along with deciding if you want to have originate and answer, acoustic or direct and full- or half-duplex, you might also have to decipher numbers like 103, 113, 202 and 212. Let's briefly review those first terms, and then see what the numbers mean.

The terms originate and answer are simply ways of designating which modem on a circuit will use a high set of tones and which modem will use the low. In that way, their tones will not collide on the circuit. Typically, most modern modems are switch-selectable between the high and low tone sets.

Acoustic modems have rubber cups which hold a standard telephone handset over an audio microphone and small speaker. The tones are acoustically coupled to the telephone system. A direct-connection modem connects electrically to the telephone system—either through a phone jack or by insertion between the handset and the telephone. Direct connection does not mean that the modem is directly connected to the computer's data bus without the use of a serial port, although the phrase is sometimes improperly used in that way. The type of modem which does not need a serial port is sometimes referred to as a bus decoding, integral or integrated modem.

In modems, the terms full- and half-duplex refer to the use of an echo circuit between the modem and terminal. In a full-duplex circuit the distant end echoes back characters so you know the line is good and your data has been received. If a modem is placed in *half-duplex, the modem* itself will provide the echo back to the terminal or computer serving as a terminal. This is probably useful only in two cases: first, when you want to do a local test to ensure that your data is getting out of the computer to the modem properly, and second, when for some reason the

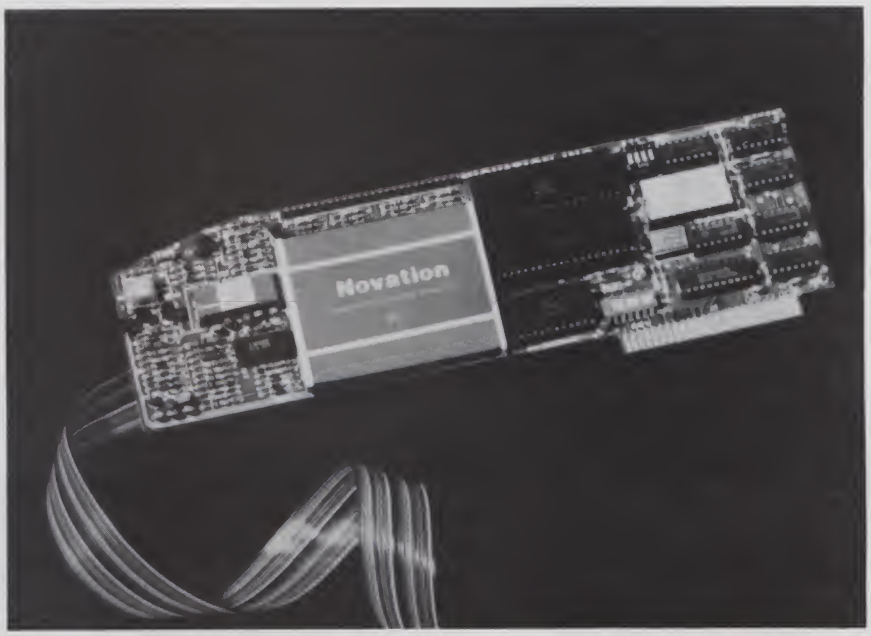

The Apple-Cat II provides a fully integrated modem with many special features for the Apple II computer.

distant end is not providing an echo and your terminal cannot display its own output. Being able to operate in half-duplex is not a vital capability in a modem.

There Is Life after 300 Baud

Now, for all those numbers. Many modern modems like the Apple-Cat II will provide different kinds of service. The most familiar service designator is the old standard Bell 103. The standards like Bell 103 simply describe the tones and signaling schemes modems use when talking to each other. The Bell standard 113 is identical to 103 except it designates an originate-only modem.

The Bell 103/113 standard describes a signaling scheme using four tones (audio frequencies) which are varied to indicate the 1's and 0's. If you want to sound really technical, you can call this frequency shift keying, or FSK. The 103 signaling scheme is usually considered to be good only up to about 300 baud. At faster speeds, each tone pulse becomes very short. You have to have a very good receiver to quickly detect and recognize the short tone burst. Some modems, notably the Potomac Micro-Magic, can operate reliably up to 600 baud using the Bell 103 FSK standard. At that speed, each bit is represented by a tone only 1.6 ms long.

The 200 Series

The Bell 200 series of modems (they call modems data sets) are medium- and high-speed units. The dial telephone network will not provide enough bandwidth to allow the transmission of 1200 baud frequency shifted data transmission in two directions simultaneously. Each end has to take turns using the channel. This sharing, called half-duplex operation (same words as above, but a slightly different meaning when applied to a communications channel), must be coordinated between the terminals. Sharing is done through the use of request to send (RST) and clear to send (CTS) signals. *Full-duplex channel operation* can be done at medium speeds using two frequency bands and changing the phase of the signals instead of the frequency.

The 202 standard modems (like the Apple-Cat II) are usually used in big systems in applications called polling. Polling systems periodically call up remote terminals to gather data. The data is dumped in primarily a one-way transmission. The 202 standard uses frequency shifted tones and requires the use of RTS and CTS signals. It is commonly being used by amateur radio operators to transfer data on the VHF bands.

The 212 data set is a dual-mode unit which will operate at 300 baud using the 103 standard or at 1200 baud using a special phase-shifted signaling pattern. Phase-shifted signaling is used at higher speeds because phase can be detected very quickly. The sine wave of a 1200 Hz tone takes about .8 ms to complete. That is about the minimum time it can be sampled except by the use of statistical or linear predictive techniques.

A phase-shifted signal can be measured in units of one cycle divided into 360 degrees. That means that a signal could ideally be decoded in about .002 ms. Bell 212 standard phase-shifted keying is used in high-speed interactive systems including Telenet, Tymnet, CompuServe and The Source. It is not compatible with 202 signaling.

Wait a minute! You mean I can't talk to my favorite information utility at 1200 baud with an Apple-Cat II? Yup—for now, that's correct. Bell 202 FSK signaling was easy to provide within the advanced design of the Novation device, but it is not the system widely used for interchange with time-shared computer/information utilities like CompuServe and The Source. As the cost drops and the popularity increases, who knows?

The 202 standard is widely used in polling systems, and there are many commercial modems available which provide the service; perhaps popularity and customer pressure will prevail. In the meantime, the 202 signaling scheme provides an economical way to exchange data at 1200 baud for users of modern LSI technology modem devides.

If You Never . . .

There is only one way to ensure you never make a mistake: never do anything. Well, I do make mistakes. For instance, in the April '81 issue I attributed the CP/M operating program to the wrong company. CP/M is a product of and trademarked by Digital Research of Pacific Grove, CA. Similarly, in the March issue some telephone numbers were scrambled, so I have included a new listing of People's Message Systems.

If You Do . . .

If you manufacture data communications products or write data communications software, send comments or questions to PO Box 691, Herndon, VA 22070. Include a stamped envelope if you want a reply. Electronic mail is welcome at TCB967 on The Source, 70003,455 on CompuServe or the AMRAD CBBS (703-734-1386).□

People's Message Systems

Anaheim, CA	714-772-8868
Ellicott City, MD*	301-465-3176
Freeport, TX	713-233-7943
Indianapolis, IN	317-862-6191
Los Angeles, CA	213-291-9314
Minneapolis, MN	612-929-6699
Mission Valley, CA	714-295-8280
Lake Forest, IL	312-295-6926
Palo Alto, CA	415-493-7691
Portola Valley, CA	415-851-3453
San Diego, CA	714-582-9557
Santa Cruz, CA*	408-476-6181
Santee, CA	714-449-5689
Shrewsbury, NJ*	201-747-6768

**not 24 hour*



THE FASTEST, MOST POWERFUL HIGH-LEVEL LANGUAGE SYSTEM FOR THE APPLE

* Runs **six to sixty times faster** than Basic
* Programming capabilities well beyond Applesoft
* Auxiliary Processor [AM9511] for **fast** Floating Point
* High-speed, extended high resolution graphics
* Software development time cut in half
* Exceptionally compact, compiled code
* **Extensible,** structured language to meet **your** needs
* Requires 48K Apple II or II+, single Disk

Developed from an extended version of FORTH, microSPEED combines the benefits of compiled code and hardware arithmetic processing for maximum microcomputing performance

COMPLETE SYSTEM $495.00
USER'S MANUAL ONLY 35.00

INFORMATION HOT LINE (301) 627-6650

applied analytics incorporated

5406 Roblee Dr. Upper Marlboro, Md. 20870

By Walter Koetke

Software Shopping

Getting the Most for Your Money

Instructional Software

The potential of microcomputers as instructional tools seems unparalleled. Unfortunately, the state of educational software is in its infancy. Software development lags behind hardware capability throughout the computing industry, but in education the gap is acute.

This software gap can cause several problems. Educators and others who understand the potential of the microcomputer can easily oversell the reality of available instructional support. Because the majority of teachers are not really familiar with the current state of software development until facilities are purchased, they are often severely disappointed. A more lasting danger is that the disappointed teacher will write off the microcomputer as just another gadget and not again be willing to experiment with this new technology. Still others might take the best software they can find and assume that represents the epitome of microcomputer support.

As a dedicated advocate of the use of computers to support instruction, I urge that you not oversell the concept. The positive aspects are so overwhelming that overselling is not necessary. Be sure that any discussion of the microcomputer's educational potential is tempered by a discussion of the educational reality of the available software.

As a consumer, you should distinguish potential from reality by insisting that software be demonstrated. When Random House and Radio Shack announced their joint venture into the educational marketplace, a rather impressive software catalog was produced detailing several desirable and possibly significant pieces of educational software. Where was the software? Could it be purchased locally? Could you arrange a demonstration? No. In fact, the software wasn't available when the catalog was printed,



nor was it available some months later as this article was written.

Unfortunately, the appearance of advertisements and even catalogs prior to the completion of the actual software is not at all unique to the specific instance described. My point is not to discuss the motivation behind this business practice, but to make you aware that it exists. Random House and the others who have done this almost certainly expect to eventually deliver everything they've advertised—sometime. And when delivered, it will likely be very close in appearance and function to the product advertised.

However, don't believe any software promises until you actually see the software operating. At the very least, be sure someone whose opinion you respect will say that he or she actually saw the software in operation. Only then should you seriously consider the instructional support that specific software might provide. Never buy any microcomputer hardware for use with software that is still being developed. You're almost certain to be disappointed.

A general rule of thumb in the computer industry at large is that the cost of hardware and software will be about the same. For instructional applications of the microcomputer in education, I suggest the cost of software should be budgeted at a level at least twice that of the hardware. Many teachers, however, have succeeded in convincing their administrators to purchase microcomputer hardware only to discover that almost no money has been provided for software.

An all too frequent request from many teachers is for help in spending their annual $100 to $200 software budget. There is no doubt that this amount of money is insufficient, but that is not a helpful answer. The fact remains that the stated sum is their budget and they want to make the best of it.

I recently encountered a response to the very specific question, "How shall I spend $150 on instructional software for a TRS-80?" The response was written by Robert W. Jackson, Mead School, 2 Andrews Road, Greenwich, CT 06830. Bob is a teacher with a large collection of instructional software and a good deal of experience using microcomputers with students. Bob's response is included here with his permission and with very little change from the original:

"I accept the challenge. We only have $150 to feed your 16K cassette-based TRS-80. First I must warn you that I am heavy into using games as a means of approaching the traditional subjects. This is a personal approach which is not accepted by many schools, which explains why I teach at the Mead School. The Mead School is a hotbed of innovative ideas.

"Our first purchase was from Softside, 6 South Street, Milford, NH 03055. We

Walter Koetke, Putnam/North Westchester BOCES, Yorktown Heights, NY 10598.

wanted to purchase the December 1980 issue of *Softside* and the tape for that month. For our $9.95 we received a great game magazine with programs for our kids to enter and some good tips. Kidnap is an adventure game which will teach kids typing and word skills, logic and common sense, and exercise their imaginations. Word Problems alone is worth the $9.95. Space Dodge and Missile Evasion are extras. Also, we wanted to purchase ten short cassettes for $7.95. We will use these because they will hold two programs per side. This will save us a lot of time instead of trying to find programs on a 30-minute tape.

"Our next purchase was from Basics and Beyond, Box 10, Amawalk, NY 10501. The best math package for the TRS-80 is the Math K-8 from Radio Shack, but at $200 it is out of our budget. Basics and Beyond's Microcosm III costs $24.95 postpaid and consists of 20 programs with sound (but they only run on 16K machines). Two programs here are worth the whole package for us. These are Multiplication and Division, each of which is a step-by-step drill. Personally, I liked the music programs because Mead is right-brain-oriented. The rest of the package is a bonus. Many programs will be useful in other areas. If you happen upon some more money, I would also recommend purchasing their Microcosm I and Microcosm II.

"Now off to Radio Shack. We want to purchase their small gray amplifier for $11.95 and a machine-language program called Space Warp (also sold under the name of Timetrek). The amplifier plugs into the cassette cable and gives us sound. Space Warp costs $14.95. We have now spent $70.

"Next we write an order to Adventure International, Box 729, Casselberry, FL 32707, for Wordchallenge, a versatile word-guessing game at $9.95. You can change the data statements and save this program on several cassettes, one for social study words, one for English words, one for metric words, Spanish, French and so forth.

"Now we can relax. We've covered math and language and we have about 25 games to boot. Do not release all the games at once. Introduce them two at a time over the year. Kids quickly become bored once they have mastered a particular skill. Next we'll explore literature. For $20 we will get a subscription to *Creative Computing*, which is full of useful programs every month along with tips for our computer literacy class and a few editorial articles for the principal. *80 Microcomputing* is a good deal at $24 a year, but the programs are too technical for us right now—maybe next year.

"Next we want to purchase the Word Watch set of four programs for $7.95 plus postage from Instant Software, Peterborough, NH 03458. This is money well spent. We will have to gear the data down to the level of our kids, but these four programs will pay for themselves. Wordrace is a two-player word game, and we like two-player games because that means two kids will get to use the few computers we have. Spelling Bee and Word Drill are just barely OK. Hidespell is good.

"Ten dollars goes to Med Systems, PO Box 2674-W, Chapel Hill, NC 27514, for a game called Playful Professor that teaches the basic four math functions and fractions. Our expenses so far are $122.

"Your next $13 goes to Omnitek Systems, 24 Marcia Jean Drive, Tewksbury, MA 01876, for Typing Tutor by Microsoft. We are going to start a typing course. Next year when the administrator wants to purchase typewriters, we will tell him that word processors are the typewriters of the future, so he will spend the money on computers instead. This program will impress the rest of your staff and gain respect for the computer. It is based on timed response methods. It measures the time between strokes to determine which fingers are weak.

"Our last hard-fought-for $15 goes to Program Design, Inc., 11 Idar Court, Greenwich, CT 06830, for a program called Vocabulary Builder 1. This set of programs teaches synonyms and antonyms using a simple drill format.

"You may well be asking, 'Why so many different vendors?' It is good to get on as many mailing lists as possible so that we are informed of new software and hardware products.

"Since we have not yet used all of our money, this is not the end of our hunt. With $4 from some other fund, we join the Computer Using Educators Group (Don Mckell, Independence High School, 1776 Education Park Drive, San Jose, CA 95133). This gets us four newsletters a year, and for $10 they will send us a disk full of public domain teacher-written programs.

"When time permits, we write a few programs of our own and then write to Dr. Earl Savage, Craig County Public Schools, PO Box 245, New Castle, VA 24127. He will send a catalog of programs for which we can trade our newly created programs. During the year our kids are typing programs from the new magazines to which we have subscribed. Other teachers come to us with ideas for programs that the kids can create.

"Craig Walker is the author of the Arrowsmith Individualized Math program, which is free for the asking and is on both tape and workbook so you can use it either way. Contact him at 2299 North G Street, San Bernardino, CA 92404."

There is both experience and thought reflected in Bob's response. If you find yourself in a situation similar to the original recipient of his advice, his comments should provide an excellent guide to a successful beginning.

THE NEW NEVADA COBOL!

At $149.95 you can't buy a better COBOL or one residing in less memory.

Now with the new Nevada COBOL, you can use the programs developed by professional business programmers over the past twenty years to run the big IBM machines. And you can develop and tailor programs on your micro and run them on your micro or recompile and run them on any mainframe computer. What's more you can do it for about one-fifth the cost of comparable COBOL compiler systems.

Almost all the popular microcomputers work with the CP/M operating system we use including Apple, TRS-80, North Star, Superbrain, Cromemco and so on.

Check the features; you'll go Nevada COBOL.

A powerful subset of ANSI-74, Nevada COBOL requires a scant 16K of RAM. It's available on 8" CP/M standard single density or 5-1/4" diskettes. Price includes diskette and manual. Price for manual only, $24.95.

Four COBOL applications packages available too.

Four COBOL applications packages are currently available. Each is priced at $24.95 for the diskette. The 73 page manual covering all four applications costs an additional $24.95. The manual carries complete COBOL source code listings and superior documentation.

Package #1 is the Budget Plan Report Generator. Here's an extraordinary time saver and planning aid for both start-up and well established businesses.

Package #2 is the Personal Financial Planner to give you some eye opening insights into your own personal spending habits.

Package #3 is Labels so you can print name and address labels.

Package #4 is Pre-COBOL for use as a pre-processor of COBOL source programs. A great programming aid.

Order today or write for complete details.

Phone (415) 751-1522 or address Ellis Computing, 600 41st Ave, San Francisco, CA 94121. Nevada Cobol is also available at Lifeboat Associates, Discount Software, Westico, Business Micro Products, Computer Information Exchange and other quality computer stores. Mastercard, Visa, C.O.D.s, or checks accepted. California orders please include sales tax.

CP/M, TRS-80 and IBM are TM's of Digital Research, Tandy Corp. and I.B.M. respectively.



↙272

ELLIS COMPUTING

SOFTWARE TECHNOLOGY

↙See List of Advertisers on page 194

Now with added words! *

ELECTRIC MOUTH



for $100, Elf II, Apple TRS-80, Level II* **From $99.95 kit**

Now — teach your computer to talk, increasing interaction between you and your machine.

That's right: the ELECTRIC MOUTH actually lets your computer talk! Installed and on-line in just minutes, it's ready for spoken-language use in office, business, industrial and commercial applications, and in games, special projects, R&D, education, security devices — there's no end to the ELECTRIC MOUTH's usefulness. Look at these features:

- Supplied with 143 letters/words/phonemes/numbers, capable of producing hundreds of words and phrases.
- Expandable on-board up to thousands of words and phrases with additional speech ROMs (see new speech ROM described below).
- Four models, that plug directly into S100, Apple, Elf II and TRS-80 Level II computers.
- Get ELECTRIC MOUTH to talk with either Basic or machine language (very easy to use, complete instructions with examples included).
- Uses National Semiconductor's "Digitalker."*
- Includes on-board audio amplifier and speaker, with provisions for external speakers.
- Installs in just minutes.

Principle of Operation: The ELECTRIC MOUTH stores the digital equivalents of words in ROMs. When words, phrases and phonemes are desired, they simply are called for by your program and then synthesized into speech. The ELECTRIC MOUTH system requires none of your valuable memory space except for a few addresses if used in memory mapped mode. In most cases, output ports (user selectable) are used.

SPOKEN MATERIAL INCLUDED (Vox I)

one	eighteen	at	dollar	inches	number	ss	c	t
two	nineteen	cancel	down	is	of	second	d	u
three	twenty	case	equal	it	off	set	e	v
four	thirty	cent	error	kilo	on	space	f	w
five	forty	400hertz tone	feet	left	out	speed	g	x
six	fifty	80hertz tone	flow	less	over	star	h	y
seven	sixty	20ms silence	fuel	lesser	parenthesis	start	i	z
eight	seventy	40ms silence	gallon	limit	percent	stop	j	
nine	eighty	80ms silence	go	low	please	than	k	
ten	ninety	160ms silence	gram	lower	plus	the	l	
eleven	hundred	320ms silence	great	mark	point	time	m	
twelve	thousand	centi	greater	meter	pound	try	n	
thirteen	million	check	have	mile	pulses	up	o	
fourteen	zero	comma	high	milli	rate	volt	p	
fifteen	again	control	higher	minus	re	weight	q	
sixteen	ampere	danger	hour	minute	ready	a	r	
seventeen	and	degree	in	near	right	b	s	

ADDITIONAL VOCABULARY NOW AVAILABLE (VOX II)

abort	complete	fifth	light	put	station
add	continue	fire	load	quarter	switch
adjust	copy	first	lock	range	system
alarm	correct	floor	longer	reached	temperature
alert	crease	fourth	more	receive	test
all	"de"	forward	move	record	"th"
ask	deposit	from	next	reverse	thank
assistance	dial	gas	no	red	third
attention	door	get	normal	repair	this
blue	east	going	north	repeat	turn
brake	"ed"	green	not	replace	under
button	emergency	hale	notice	room	use
buy	enter	heat	open	safe	waiting
call	entry	hello	operator	second	warning
called	"er"	help	or	secure	was
caution	"eth"	hurts	pass	select	water
celsius	evacuate	hold	per	send	west
centigrade	exit	hot	power	service	wind
change	fail	in	press	side	window
circuit	failure	incorrect	pressure	slow	yellow
clear	fahrenheit	intruder	process	slower	yes
close	fast	key	pull	smoke	zone
cold	faster	level	push	south	

*Registered Trademarks

Continental U.S.A. Credit Card Buyers Outside Connecticut

TO ORDER

Call Toll Free: 800-243-7428

To Order From Connecticut, or For Technical Assistance, call (203) 354-9375

NETRONICS R&D LTD.

333 Litchfield Road, New Milford, CT 06776

Dept K7

Please send the items checked below:

- ☐ S100 "Electric Mouth" kit w/Vox I ..... $ 99.95
- ☐ Elf II "Electric Mouth" kit w/Vox I ..... $ 99.95
- ☐ Apple "Electric Mouth" kit w/Vox I $119.95
- ☐ TRS-80 Level II "Electric Mouth" kit w/Vox I $119.95
- ☐ VOX II (Second Word Set) ..... $ 39.95

Add $20.00 for wired tested units instead of kits. VOX II postage & insurance $1.00, all others $3.00 postage and insurance. Conn. res. add sales tax.

Total Enclosed $ _____

☐ **Personal Check** ☐ **Cashier's Check/Money Order**

☐ **Visa** ☐ **Master Charge (Bank No.** _____**)**

Acct. No. _____ **Exp. Date** _____

Signature _____

Print Name _____

Address _____

City _____

State _____ **Zip** _____

When today's software is compared to the instructional potential of the microcomputer, none of it seems very good. You should, however, select the best of that which is available and help evolve that potential.

As is often the case in many situations, having money does not always mean our needs are readily filled. A teacher recently asked me for suggestions regarding the most effective way to spend an available $1000 on software for the Apple II which could be used to assist the teaching of reading. I invited this teacher to spend a day in the software resource center for which I'm responsible. She accepted this invitation. Because her interest was very specific, she was able to actually run every piece of related software available as well as scan the advertisements in a representative sample of current magazines.

At the end of the day, her quite correct conclusion was a surprise. She planned to purchase every piece of reading-related software she had sampled in the resource center as well as purchase every piece of reading-related software she had seen advertised. The surprise was that all of these purchases did not even come close to consuming the entire $1000.

The point is not that the resources examined were inadequate. They were, in fact, very complete. There just isn't very much commercially available instructional software—good or bad—that will assist the teaching of reading. Software development does indeed lag way behind hardware development.

For those interested in the teaching of reading, there is some good news. Now you can spend your full $1000 allotment for software. Since the occurrence of the described incident, Borg-Warner Educational Systems, 600 West University Drive, Arlington Heights, IL 60004, has released the large Critical Reading software package for $750. According to Borg-Warner:

"The Critical Reading program is designed to help a student think critically about written discourse. It introduces the student to basic rules of logic and provides drill and practice in reasoning skills which will aid in overall comprehension of reading material. This program includes automatic diagnostic and prescriptive pretests, instructional lessons with recycling capabilities, progress checks after each lesson to test the student's comprehension of materials and posttests. The management file on each disk stores student records in up to eight assigned reading groups. The management system also maintains and adapts individual student prescriptions on the basis of the entry diagnostic test and ongoing student performance on the lesson material. Because of its self-pacing capabilities, Critical Reading may be used for developmental, remedial and gifted student instruction."

I suggest taking a look at the Borg-Warner material. While there are certainly some valid criticisms regarding their software (see the February 1981 *AEDS Monitor*), the package is a good one. When today's software is compared to the instructional potential of the microcomputer, none of it seems very good. You should, however, select the best of that which is available and help evolve that potential.

Several articles have explained the enormous cost of developing good instructional software. The usual source of these articles is one of the more traditional publishers who has recently entered the software business or one of the vendors of minicomputers. My concern now is not to dispute the stated costs—perhaps another time.

My concern is for the large number of good instructional programs that have been written by the teachers who are using them with their own classes and which have been shared with almost no one beyond those classes. Each week the resource center for which I'm responsible discovers—usually by accident—*another* piece of very good teacher-produced software. Most of these are worth sharing with other teachers, and many are good enough to have commercial possibilities. If you have original instructional software that students enjoy, I urge you to explore the possibility of marketing your material.

A good starting point would be any of the companies mentioned in the letter written by Robert Jackson. The only word of caution is to be sure your program is original. A slightly modified program you entered from a magazine may be super for your students, and I encourage you to use this approach. Selling that material, however, is illegal.

On the other hand, if you had an idea and then implemented the entire program yourself, by all means contact one or more of the publishers. Even with higher postal rates you're risking very little, and there's always the chance that you can sell a great many copies.□

Introducing:

SmartWare™

(LISP)



Introducing
LISP. The language
that can think for itself.

With SmartWare, your micro-computer possesses intelligence. Solves problems like never before. Actually can learn *from its mistakes.* And educates itself in much the same way your brain operates. It's a new concept in the way information is handled in microcomputers.

We appropriately called our version of LISP, SmartWare. Because it's as limitless as the human imagination, mind, memory.

An advanced, high-level language, LISP was first developed for use in artificial intelligence on large computers. And now, LISP is available from Datasoft for use on the Apple II.

Store multiple programs in memory. It can take it. Program other languages into LISP. It's no problem. Because LISP offers greater capacity and power. And, it's a faster, more streamlined language. For example, just 2 lines in LISP could equal hours of BASIC programming.

The facts: Relational data base capabilities. User and program definability. Pattern-directed invocation language. Uses syntax and data structures upon which esoteric applications may be implemented. Remembers data along with "relationships affecting it." Offers REAL power to micros. 48K diskette $125.00.

At MIT, they say LISP is the language of the future.

At Datasoft, we say, why wait. Ask your local computer dealer for SmartWare. Right now! And turn your computer on to thinking.

SmartWare by ✓35
Datasoft Inc.™
COMPUTER SOFTWARE

19519 Business Center Dr., Northridge, CA 91324
(213)701-5161

Order through your local software dealer or send check or money order, plus $2.00 shipping and handling to Datasoft.

*Apple II is a registered trademark of Apple Computers, Inc.


By Eric Maloney

Acronym Crisis

Relief Needed ASAP

The computerist does not live by acronyms alone, but he'd give it a try in a tight pinch.

Charles J. Sippl's *Computer Dictionary and Handbook* devotes 19 pages to acronyms and abbreviations. The A's alone include A, ABC, ABM, ABO, abs, AC, ACA, ACD, ac/dc, ACI, ACIA, ACK, ACTS, ACU, AD, ADA, ADC, ADCCP, A/D, ADDAR, ADONIS, ADP, ADPC, ADPE, ADPS, ADR, ADS, ADX, AF, AFC, AFG, AGC, AIG, ALC, ALE, ALGOL, ALT, ALU, AM, A/M, AMC, AM-DBS, AMP, AMR, AM-SSB, ANACOM, ANATRON, ANI, ANSI, ANT, AO, A-O, AMPL, AOC, AOS, APC, APD, APL, APOTA, APP, APRXLY, APT, APTS, APUHS, APULS, AQ, AQL, ARAM, ARC, ARL, ARM, A Q, ART, ARU, AS, ASC, ASCC, ASCII, ASD, ASK, ASLIB, ASLT, ASN, ASP, ASR, ASV, AT, A/T, ATE, ATS, AUTOPIC, AVD, AVE and AVL.

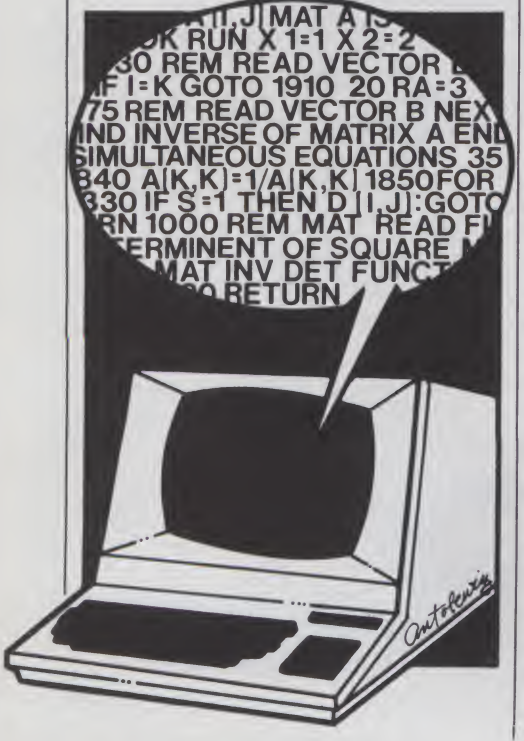

It is no wonder that editors often feel like they're drowning in a vat of alphabet soup.

A fresh new acronym crisis awaits the editor in nearly every manuscript. For instance, when are acronyms all capitals, and when are they all lowercase? *Microcomputing* lowercases ac (alternating current), afc (automatic frequency control), cps (characters per second), rf (radio frequency) and swr (standing-wave ratio), among others. Why? Simple—that's the way we've always done it.

Another problem: when do acronyms metamorphose into words? The English language is loaded with precedents: radar (radio detecting and ranging), sonar (sound navigation ranging), scuba (self-contained underwater breathing apparatus), laser (light amplification by stimulated emission of radiation) and rem (roentgen equivalent man) are a few examples. Computerese has several candidates, most notably computer languages such as BASIC (Basic), COBOL (Cobol) and FORTRAN (Fortran).

Editors and computerists haven't yet made up their minds. One magazine prints BASIC, and the other prefers Basic. One computerist PEEKs and POKEs, while his neighbor peeks and pokes.

Unfortunately, many computerists have taken to capitalizing words that shouldn't be capitalized. Take Pascal, for instance—even Sybex's *Microprocessor Lexicon* lists it as PASCAL. But Pascal, unlike many other computer languages, is not an acronym—it is the name of a person.

Speaking of computer languages, how many people can recall what COBOL, BASIC and FORTRAN stand for? Probably not too many. I suspect that all three will become upper-lowercase words in time.

* * * * *

Anthropomorphisms continue to creep insidiously into computerese.

From Percom comes a news release with the following: "The burn-in test uncovers latent defects that might cause 'infant mortality' failures."

Meanwhile, a press release from Infoscribe includes the line "An elevated temperature testing room is being constructed to ensure the elimination of infant mortality in electronic components."

There is something disturbing about the phrase "infant mortality" when used in connection with electronic parts. The words death or die, when used in such a context as "my car died today," are colloquial, so broad in meaning that they carry no loaded implications. But the term "infant mortality" refers to a set of social, economic and human problems that evoke a highly emotional reaction from many concerned people. Its use to denote malfunctions in electronic components borders on flippancy and bad taste.

It certainly gets the point across. But a nice, neutral term like "early failure" more than suffices.

* * * * *

In reference to the May column ("A Language of Their Own: Time to Reeducate Educators," p. 26), Raymond Kostanty of Wood-Ridge, NJ, writes that I shouldn't be too harsh on Webster for not including the word indepthly.

"Here are two other words, both from

IT WAS INEVITABLE

Sooner or later, someone had to take all this proven microcomputer hardware and software technology and wrap it up in a portable package at a price that shocks the industry. Adam Osborne decided to do it sooner.

The OSBORNE 1®, from Osborne Computer Corporation. You get full CP/M® disk computer capabilities—Z80A® CPU, 64K bytes of RAM memory, a full business keyboard, a built-in monitor, and two floppy drives with 100K bytes each of storage. You get two interfaces, the IEEE 488 and the RS-232C. Just connect a printer, via either interface.

Software? You get CP/M®, CBASIC-2®, Microsoft BASIC®, the WORDSTAR® word processing system with the MAILMERGE® mailing list feature, and the SUPERCALC® electronic spreadsheet package. All standard. All for $1795.



And it's *portable*. When the keyboard is clipped over the display panel, only the weatherproof plastic case is exposed. (There are even optional modem electronics, couplers, battery packs, and external monitor connections, providing practically unlimited system portability.)

It's all business. The OSBORNE 1 delivers *significant* productivity at an irresistable price. At $1795, it's immediate and lasting success as a personal business computer is, quite simply, inevitable.



$1795

OSBORNE

COMPUTER CORPORATION

26500 Corporate Avenue Hayward, California 94545 (415) 887-8080

368

Orders for the Osborne 1 Computer can be placed over the telephone at (415) 887-8080. Your order will be forwarded by the factory for delivery by your nearest authorized Osborne 1 dealer.

Phrases—The Long vs the Short

a number of	many
according to our records	we find
as a result	thus, hence, therefore
at an early date	soon, now
at the present time, at this point in time	now, right now, to date, at present
at this stage	to date, so far
at your earliest convenience	soon, now
available evidence indicates	unavailable evidence can't indicate anything; omit available
due to the fact that	because
enclosed please find	here's
finalized our decision	decided
for the purpose of	for, to
for what reason	why
has the capability of	can
in accordance with	by, under
in actuality	actually
in addition	besides, also, too
in addition to	besides, on top of
in advance of	before
in as much as	since, because
in conjunction with	along with, and, with
in juxtaposition to	side-by-side with, next to
in order for	for
in order that	so that
in order to	to
in our opinion	we believe
in some cases	sometimes
in the amount of	for
in the event that	if, in case
is unable to	can't
it goes without saying	clearly, obviously
it is obvious that	clearly, obviously
make a determination	decide
manifests itself as	shows up as
more importantly	more important
prior to	before
reflects a balance of	shows
until such a time as	until
with the result that	so that
each and every	each, every
were unable to	couldn't
all of	all (keep of if the next word is a pronoun)
up to this point	so far
in spite of	despite
a variety of	many

the May issue, he also forgot the list: the verb trash ('Trash Your Typewriter,' on the cover) and the verb keyboard ('Those members with terminals keyboard their articles into a file . . .,' on the 15th line of page 94)."

Well, I'll defened the word trash; it's a rough, unsightly bit of slang, which is precisely what we wanted in that situation. Keyboard, on the other hand, is pretty dreadful as a verb, particularly when there's a nice clean one like type waiting to be used.

* * * * *

Last month's column listed 14 networks or products that end with "net." Since then, 13 more have popped up: Hi-Net, FundsNet, Avnet, Omninet, M/NET, IBS-NET, CSNet, Arpanet, Phonenet, Internet, Z-NET, DECnet and AGNET. Fishnet and Hairnet haven't arrived yet, but it's only a matter of time.

* * * * *

Raymond Kostanty (see above) submits the accompanying list, "Phrases—The Long vs the Short." It's surprising how much you can tighten a piece of writing by knocking out some of the unwieldy verbiage.□

MICRO QUIZ

What Does This Program Do?

What is the sum of all of the different values that Z takes on during the execution of the following program?

```
DIM S(10)
S(1) = 1
Z = -1
FOR I = 2 TO 10
    S(I) = S(I - 1) + 2
    Z = -S(I) * S(I - 1)/Z
NEXT I
```

(continued on page 172)

MOVING?

Let us know 8 weeks in advance so that you won't miss a single issue of *Kilobaud Microcomputing*. Attach old label where indicated and print new address in space provided. Also include your mailing label whenever you write concerning your subscription. It helps us serve you promptly.

☐ Address change only
☐ Extend subscription
☐ Enter new subscription
☐ 1 year $25.00
☐ Payment enclosed (1 extra BONUS issue)
☐ Bill me later

If you have no label handy, print OLD address here.

AFFIX LABEL

Name _____ Call _____
Address _____
City _____ State _____ Zip _____

print NEW address here:

Name _____ Call _____
Address _____
City _____ State _____ Zip _____

Kilobaud **Microcomputing** P.O. Box 997 • Farmingdale NY 11737

NEW

apple computer

48k


CALL FOR PRICES:
PEACHTREE SOFTWARE
BPI SOFTWARE
ATARI
APPLE
CALIF COMPUTER
MTN HDW
EPSON
D.C. HAYES

$1199

pm computers ✓129

P.O. box 6256
mobile, al 36660
(404) 860-9711

master charge VISA




APPLE BUG

FANTASTIC, EXCITING, A FIRST
THE ONLY PROGRAM AROUND THAT
ACTUALY LETS YOU SEE ASSEMBLY
LANGUAGE EXECUTE ON SPLIT SCREEN
...EXPERIENCED PROGRAMMERS CAN
TAKE APART ANY PROGRAM, RELOCATE
ANYWHERE IN MEMORY..

49.95

RONDURE COMPANY the computer room
2522 BUTLER/DALLAS, TX. 75235 ✓74
214-630-4621

GE TERMINET 300 PRINTER



Pin feed—9" paper

- 80 Print positions
- Receive only
- ASCII code
- RS 232 interface
- 30 CPS
- Upper & lowercase
- Shipping wt 75#

Shipping containers $15.00
(used)
(good working condition)

Will run on serial RS232 port of most micros including TRS-80. SALE $395.00

FLAT-PACK ACOUSTIC Modem Pickup



$19.50

RS 232 CABLES—LIKE NEW

6' pins wired male/female—$25.00
8' RS 232 male/male—$12.50
15' RS 232 male/male—$20.00
25' RS 232 male/male—$22.50
50' RS 232 male/male—$45.00

MICRO SWITCH KEYBOARD
USED BUT LOOKS VERY NICE



ASC II $40.00 (With Print)

USED FANS



Muffin-$8.00
Sprite-$6.00

ORDERING INFORMATION:
We ship the same day we receive a certified check or money order. Texas residents add 5¾ sales tax. Please call if you have a question. Write for our CATALOG of many parts, terminals, printers, etc. All items subject to availability. Your money returned if we are out of stock.

SHIPPING INFORMATION:
Modems: $3.00 each; Key Boards $3.50, Power Supply $8.00. Larger Items & Parts: Specify Freight or Air Freight Collect. Foreign Orders: Add appropriate freight or postage. We now take Master Charge and Visa orders. Specify full number, bank number and expiration date.



USED OMNITEK Orig. Only $75.00

APPLE II TRS·80

QUALITY DISK SOFTWARE

VISA master charge

☐ HOME FINANCE PAK I: Entire Series $49.95 (A)(T)

☐ CHECK REGISTER AND BUDGET: This comprehensive CHECKING ACCOUNT MANAGEMENT SYSTEM not only keeps complete records, it also gives you the analysis and control tools you need to actively manage your account. The system provides routines for BUDGETING INCOME AND EXPENSE, AUTOMATIC CHECK SEARCH, and BANK STATEMENT RECONCILING. CRT or printer reports are produced for ACTUAL EXPENSE vs BUDGET, CHECK SEARCH DISPLAY, RECONCILIATION REPORT and CHECK REGISTER DISPLAY by month. Check entry is prompted by user-defined menus of standard purposes and recipient codes, speeding date entry and reducing disk storage and retrieval time. Six fields of date are stored for each check: amount, check no., date, purpose, recipient and TAX DEDUCTIBLE REMINDER. CHECK SEARCH routines allow searching on any of these data fields. Routines are also provided for CHECK SORT by date and check no., DATA EDITING and Report Formats. Up to 100 checks/mo. storage $39.95

☐ SAVINGS: Account management system for up to 20 seperate Savings accounts. Organizes, files and displays deposits, withdrawels and interest earned for each account. Complete records shown via CRT or printer. $14.95

☐ CREDIT CARD: Get control of your credit cards with this program. Organizes, stores and displays purcheses, payments and service charges for up to 20 separate cards. Use for credit cards or bank loans. CRT or printer reports $14.95

☐ UNIVERSAL COMPUTING MACHINE: $49.95 (A)(T)

A user programmable computing system structured around a 50 row x 50 column table. User defines row and column names and equations forming a unique computing machine. Table elements can be multiplied, divided, subtracted or added to any other element. User can define repeated functions common to a row or column greatly simplifying table setup. Hundreds of unique computing machines can be defined, used, stored and recalled, with or without old data, for later use. Excellent for sales forecests, engineering design analysis, budgets, inventory lists, income statements, production planning, project cost estimates-in short for any planning, analysis or reporting problem that can be solved with a table. Unique curser commends allow you to move to any element, change its value and immediately see the effect on other table values. Entire table can be printed by machine pages (user-defined 3-5 columns) on a 40 column printer.

☐ COLOR CALENDAR: $29.95 (A)

HI-RES color graphics display of your personal calendar. Automatic multiple entry of repetitive events. Review at a glance important dates, appointments, anniversaries, birthdays, action dates, etc. over a 1 year period. Graphic calender marks dates. Printer and screen display a summary report by month of your full text describing each day's action item or event. Ideal for anyone with a busy calendar.

☐ BUSINESS SOFTWARE: Entire Series $159.95 (A)(T)

☐ MICROACCOUNTANT: The ideal accounting system for the small business. Based on classic T accounts and double-entry bookkeeping, this efficient program records and produces reports on account balances, general ledger journels, revenue and expenses. Screen or 40 column printer reports. Handles up to 1000 journel entries per month up to 300 accounts. Includes a short primer in Financial Accounting. . . . $49.95

☐ UNIVERSAL BUSINESS MACHINE: This program is designed to SIMPLIFY and SAVE TIME for the serious businessman who must periodically Analyze, Plan and Estimate. The program was created using our Universal Computing Machine and it is programmed to provide the following planning and forecasting tools

CASH FLOW ANALYSIS — PROFORMA BALANCE SHEET — SOURCE AND USE OF FUNDS
PROFORMA PROFIT & LOSS — SALES FORECASTER — JOB COST ESTIMATOR

Price, including a copy of the Universal Computing Machine $89.95

☐ BUSINESS CHECK REGISTER AND BUDGET: Our Check Register and Budget programs expanded to include up to 50 budgeteble items and up to 400 checks per month. Includes bank statement reconciling and automatic check search (48K) $49.95

☐ ELECTRONICS SERIES: Entire Series $259.95 (A)(T)

☐ LOGIC SIMULATOR: SAVE TIME AND MONEY. Simulate your digital logic circuits before you build them. CMOS, TTL, or whatever, if it's digital logic, this program can handle it. The program is an interactive, menu driven, full-fledged logic simulator capable of simulating the bit-time by bit-time response of a logic network to user-specified input patterns. It will handle up to 1000 gates, including NANDS, NORS, INverters, FLIP-FLOPS, SHIFT REGISTERS, COUNTERS and user-defined MACROS. Up to 40 user-defined, random, or binary input patterns. Simulation results displayed on CRT or printer. Accepts network descriptions from keyboard or from LOGIC DESIGNER for simulation. $159.95

☐ LOGIC DESIGNER: Interactive HI-RES Graphics program for designing digital logic systems. A menu driven series of keyboard commends allows you to draw directly on the screen up to 15 different gate types, including 10 gate shape patterns supplied with the program and 5 reserved for user specification. Standerd petterns supplied are NAND, NOR, INVERTER, EX-OR, T-FLOP, JK-FLOP, D-FLOP, RS-FLOP, 4 Bit COUNTER and N-BIT SHIFT REGISTER. User interconnects gates just as you would normally draw using line graphics commends. Network descriptions for LOGIC SIMULATOR generated simultaneously with the CRT diagram being drawn. $159.95

MANUAL AND DEMO DISK: Instruction menual and demo disk illustrating capabilities of both programs $29.95

☐ MATHEMATICS SERIES: Entire Series $49.95 (A)

☐ STATISTICAL ANALYSIS I: This menu driven program performs SIMPLE LINEAR REGRESSION analysis, determines the mean, standard deviation and plots the frequency distribution of user-supplied data sets. Printer, Disk, I/O and edit routines included (32K min.) $19.95

☐ NUMERICAL ANALYSIS: HI-RES 2-Dimensional plot of any function. Automatic scaling. At your option, the program will plot the function, plot the INTEGRAL, plot the DERIVATIVE, determine the ROOTS, find the MAXIMA and MINIMA and list the INTEGRAL VALUE. $19.95

☐ MATRIX: A general purpose, menu driven program for determining the INVERSE and DETERMINANT of any matrix, as well as the SOLUTION to any set of SIMULTANEOUS LINEAR EQUATIONS. Disk I/O for data save. Specify 55 eqn. set (48K) or 35 eqn. (32K) $19.95

☐ 3-D SURFACE PLOTTER: Explore the ELEGANCE and BEAUTY of MATHEMATICS by creating HI RES PLOTS of 3-dimensional surfaces from any 3-variable equation. Disk save and recall routines for plots. Menu driven to vary surface parameters. Hidden line or transparent plotting $19.95

☐ ACTION ADVENTURE GAMES: Entire Series $29.95 (A)

☐ RED BARON: Can you outfly the RED BARON? This fast action game simulates a machine gun DOG FIGHT between your WORLD WAR I BI-PLANE and the baron's. You can LOOP, DIVE, BANK or CLIMB in any one of 8 directions and so can the BARON. in HI-RES graphics $14.95

☐ BATTLE OF MIDWAY: You are in command of the U.S.S. HORNETS' DIVE BOMBER squadron. Your targets are the Aircraft carriers, Akagi, Soryu and Kaga. You must fly your way through ZEROS and AA FIRE to make your DIVE-BOMB run. In HI-RES graphics $14.95

☐ SUB ATTACK: It's April, 1943. The enemy convoy is headed for the CORAL SEA. Your sub, the MORAY, has just sighted the CARRIERS and BATTLESHIPS. Easy pickings. But watch out for the DESTROYERS they're fast and deadly. In HI-RES graphics $14.95

☐ FREE CATALOG All programs are supplied on disk and run on Apple II w/Disk & Applesoft ROM Card & TRS-80 Level II and require 32K RAM unless otherwise noted. Detailed instructions included. Orders shipped within 5 days. Card users include card number. Add $1.50 postage and handling with each order. California residents add 6½% sales tax. Foreign orders add $5.00 postage and handling.

Make checks payable to:
SPECTRUM SOFTWARE ✓306
P.O. Box 2084 142 Carlow, Sunnyvale, CA 94087
For phone orders - 408-738-4387
DEALER INQUIRIES INVITED

✓See List of Advertisers on page 194

Compiled by Eric Maloney

The Best Of the West

Computer Faire Trots Out More of the Same

Erstwhile reporter Dennis Bathory Kitsz submits the following report on the West Coast Computer Faire last April:

This year's West Coast Computer Faire, the sixth annual event of its kind, was marked primarily by large quantities of the same old thing: look-alike computers, violent game software, sexist T-shirts and hype. There was old technology repackaged (Commodore's VIC computer), old software not repackaged (those Apple "music" programs), old technology in new guises (a 60-pound prototype of a "portable" businessperson's computer) and peculiarly matched electronic devices (a 30-megabyte disk drive on a TRS-80). Bizarreness abounded, such as the plywood-encased barroom version of Atari computers, and a beautifully designed Stratos microcomputer in a for-the-person-who-has-everything teakwood cabinet. The show was also notable for its absentees, particularly the folks from Apple, who had nothing to show and may well have traded their company back for the VW bus.

Nevertheless, the Faire was an exciting event because almost the entire range of present microcomputer technology and ideas was visible, and because nearly 35,000 people attended the three-day show. Among the most interesting ideas on exhibit: John Bell Engineering's miniature control microcomputer kits; a fast Fourier transform program showing the frequency spectrum of music in a real-time bar graph; a Canon desk computer armed with built-in double Exatron stringy floppies; and the newer Sinclair ZX-81 micro using programmed logic arrays to reduce its chip count to a half-dozen (and prevent bootlegging).

Other items of moderate interest included a complete computer kit that is software compatible with the TRS-80, but with high resolution and color graphics; the heavy use of Epson MX-80 printers for demonstrations on many machines; high-quality video terminals with excellent resolution and gray scale; and voice input/output software/hardware with considerable improvements of accuracy and clarity.

There was evidence of the continued fall of prices for small hardware. Once over $200, complete sets of eight 16K dynamic RAM chips (fast, 200 ns types) were available by show's end for $17. Also very costly at one time, type 2716 erasable memories (2048 bytes) were selling for $7. Static RAMs were inexpensive, with workhorse 2102 memories selling for 50 cents and 2114 and 2118 memories available for $3 and $10, respectively.

This year's Computer Faire was truly the show of the word processor. At least two dozen new systems were in evidence, from full-featured, complicated, office-style systems to stripped-down programs for under $10. The real breakthrough in word processing, however, was the appearance of two functioning, expandable, 20,000-word-plus dictionaries that work *accurately and quickly:* Hexspell and Microproof, both currently for the TRS-80. Entire documents can be proofread for words not found in the program's dictionary, and these are presented for inclusion or alteration. The programs are fast; Microproof completed a 2000-word document in under 30 seconds.

People were also news at the Faire: Adam Osborne presented his new microcomputer; Wayne Green and Sherry Smythe courted TRS-80 users on the floor; Steven Ciarcia pulled circuit boards from every pocket; Robert Purser (*Purser's Guide*) was at his dapper best. Carl




View of the main floor of the West Coast Computer Faire. Nearly 35,000 people attended the three-day event.



Direct Video video display processor combines high-resolution graphics and gray scale for a versatile, interactive display.



The Commodore VIC was shown at the Faire; a line of children queued up to play games using the VIC's color graphic display.

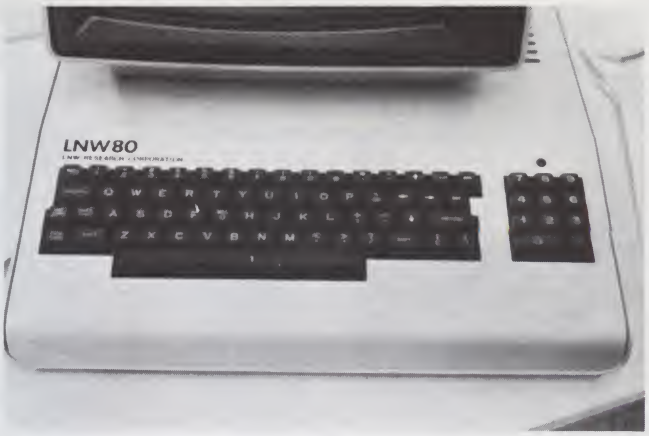

LNW-80 is a complete TRS-80 compatible kit. It offers an expanded keyboard, color and high-resolution graphics. All TRS-80 software will run unmodified on the LNW-80; the bare board costs under $100.

Helmers, Don Lancaster, Sol Libes, David Ahl and many others conducted seminars and met attendees.

EYP Delay

Six months ago, AT&T was moving full-steam ahead with a free experimental electronic yellow pages service in Austin, TX. But the Texas Daily Newspaper Association has set up a roadblock by convincing the state Public Utilities Commission to delay the project until a variety of questions concerning AT&T's role in data communications are cleared up.

The PUC ruled that the project was not experimental but a home marketing test, and therefore required a public hearing and commission certification. AT&T appealed the ruling to a Texas state district court, but the court upheld the PUC decision. Joining the TDNA against AT&T were Datapoint Corp. and Tandy Corp.

The public hearings are slated to begin July 6.

The proposed Austin videotext service is the latest step by AT&T to enter the electronic information services business. The company has also launched videotext experiments in Albany, NY, and Coral Gables, FL, the latter with Knight-Ridder Newspapers.

The controversy surrounds a ruling by the Federal Communications Commission called the Computer Inquiry II which reinterpreted a 1956 consent decree that barred AT&T from entering unregulated telecommunications markets. The FCC said that AT&T could be an information provider as well as a carrier as long as it established a separate subsidiary for that purpose.

The Justice Department disagreed, and in March AT&T went to a US district court in New Jersey to clarify the meaning of the 1956 consent decree.

The newspaper industry has fought AT&T every step of the way. The feeling is that AT&T—whose assets exceed the combined assets of the entire newspaper industry—is in a position to completely dominate the electronic information market, thus seriously cutting into newspapers' classified advertising revenues and infringing upon their function as an information provider.

As one publisher said at the 1980 International Newspaper Advertising Executives conference, "he who owns the database owns the ballgame."

The Coral Gables experiment, called Viewtron, was coordinated by KRN subsidiary Viewdata Corp. of America and AT&T subsidiary Southern Bell.

	1980	1985	1990
Video			
Programmable	220	275	295
Non-Programmable	90	5	0
Total Video	310	280	295
Nonvideo			
Nonvideo Games	510	675	820
Learning Aids	220	295	360
Electronic Chess and Similar	170	220	275
Home Arcade Games	40	50	65
Total Nonvideo	940	1240	1520
Total Electronic Game Market	1250	1520	1815

Ten-year projection of manufacturers' sales of electronic games, in millions of dollars. (Source: International Resource Development, Inc.)

Micros vs Video Games

The electronic games market will stabilize, says a recent report from International Resource Development, but faces a "major threat" from the growth of home computers.

The nonvideo segment has managed to avoid problems by incorporating hardware and software—as in electronic chess—in such a manner that a microcomputer program can't duplicate it. But, the report says, it will make little sense for the home computerist to buy video games when he can pick up a microcomputer software package for much less.

The IRD says that electronic games manufacturers will take three courses of action:

- Some companies, such as Bally, will withdraw from the market.
- Others, such as APF Electronics, will make games that can be upgraded to computers.
- Finally, some companies will start making microcomputers. Atari is the most obvious example of this strategy.

The report says that success in the electronic games market will come to those who incorporate such new technologies as voice synthesis and holography.

Educators on Piracy

The Wyoming Science and Mathematics Teaching Center at the University of Wyoming in Laramie has issued a policy statement of software piracy which it

hopes will be adopted at the National Council of Teachers of Mathematics this fall.

"If a program's listing or written documentation contains a claim to authorship or if the media has electronic guards against copying or listing the program, unauthorized reproduction of the program will be deemed as constituting larceny," the statement reads.

The SMTC is involved in exchanging teacher-authored software and evaluating commercial software. The Center has issued a second statement which says that it "will not participate in the unauthorized reproduction or exchange of any computerized courseware which bears an explicit or implicit copyright."

"I have not seen a similar statement from any other school and I would like to see this kind of commitment become common," says John C. Russell of the Center.

TI LOGO

Texas Instruments has released its own version of LOGO, the children's computer language developed by Seymour Papert and the Massachusetts Institute of Technology LOGO lab.

TI LOGO runs on the TI 99/4 microcomputer. The child uses the keyboard to draw geometric shapes and figures and make them move. LOGO is designed to stimulate the child to analyze his task, and in the process become conscious of how he solves problems. The program lets them try different solutions to a problem, modifying the solution until the correct one is reached.

TI LOGO is retailing for $299.95. The software requires the TI-99/4, a monitor, disk drive, disk controller and memory expansion unit.

Cable in Boston

A hint of things to come in cable television was provided by the only two companies left in the running for Boston's cable franchise.

Cablevision Systems of Woodbury, NY, and Warner-Amex, owner of the QUBE system in Columbus, OH, disclosed their offers to the city of Boston last April after six other bidders dropped out.

Most interesting were the provisions for community access to the cable. Both bidders were required by the city to offer in their proposal 5 percent of their gross revenue to a nonprofit corporation for community access and local programming called the Boston Access and Information Corp. In addition, Cablevision offered $500,000 to the BAIC during the first two years, $500,000 toward a downtown studio, and an undetermined number of two-way viewing centers.

Warner-Amex, meanwhile, offered $1 million to the BAIC over the first two years, a fully-equipped downtown studio, seven community access studios, a city hall studio and 20 public viewing centers.

Cablevision would provide a maximum of 72 channels for $8 a month, while Warner-Amex would provide 62 channels for $9.95. Warner-Amex would also provide their two-way interactive QUBE system for $3.95 and 11 free channels for elders.

Other features of the Warner-Amex service would include the three "superstations" from Chicago, Atlanta and New York; two national sports channels; Cable News Network, and the children's network Nickelodeon.


Cablevision would offer the Cable News Network, two national sports channels, the Chicago and Atlanta superstations and a variety of other special-interest channels.

The firms' six competitors dropped out apparently because of the 5 percent allotment of the BAIC. This is on top of 3 percent that will go into the city's coffers. Several bidders stated simply that 8 percent was too much.□


IT'S ABOUT TIME!

SUPERCLOCK II™

A COMPLETE CLOCK/CALENDAR SYSTEM FOR THE APPLE II.



FEATURES:
- Timing from milliseconds to 99 years
- 12/24 Hour formats plus day of week
- Does not use C800-CFFF address space
- Automatic dating of files stored on disk
- Automatic updating of PASCAL's Filer
- Up to four software controlled interrupts
- Full battery operation for up to 10 years



SUPERCLOCK II COMPLETE SYSTEM $159

NEW — TIME-CLOCK II program automatically keeps track of the time you spend on your computer for each job, client, program, etc. Then prints out a detailed report. Requires SUPERCLOCK II, Applesoft, and disk $30

west side electronics

P.O. Box 636D, Chatsworth, CA 91311 Phone (213) 884-4794

All orders - add $3.50 for postage, insurance, and handling ($7.00 outside Continental USA). California residents add 6% sales tax. A 3% surcharge will be added to all credit card orders.

Apple, Apple II, and Applesoft are trademarks of Apple Computer, Inc.

APPLE PASCAL™

A HANDS-ON APPROACH

Gives you everything you need to use the most powerful language your computer can have.



User-tested, step-by-step, A-to-Z approach features hands-on experiences in creating, running, and debugging programs. Volume is spiral-bound to lie flat by the keyboard while it takes you from basics to advanced programming and graphics applications. No math background is required. Only $14.95. Order today — put the power of Pascal to work for you.

Also available
BASIC: A Hands-On Method
Second Edition
Herbert D. Peckham,
Spiral-bound, 306 pp., $12.95

Mail the coupon today

Mail to:
D. LaFrenier
McGraw-Hill Book Company
1221 Avenue of the Americas
New York, N.Y. 10020

SAVE MONEY: Remit with order and we pay all shipping and handling costs. Full return privileges still apply.

Please send me the books checked for 15 days' free examination. At the end of that time I will pay for the books I keep, plus local tax, postage and handling, and return any unwanted books postpaid.


☐ APPLE PASCAL (49171-2), $14.95
☐ BASIC: A HANDS-ON METHOD (49160-7), $12.95

Name _____
Address _____
City/State/Zip _____

62-U444-2681-3

Take the guess-work out of the computer hunt... with

WEBSTER'S MICRO-COMPUTER BUYER'S GUIDE

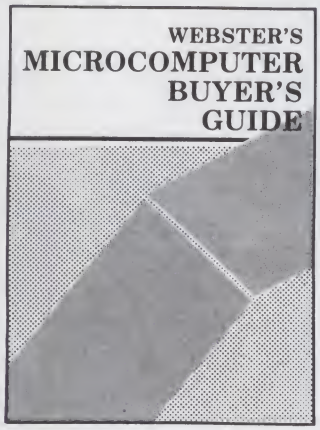

Webster's MICROCOMPUTER BUYER'S GUIDE reviews in detail more than 150 microcomputer systems from over 50 major microcomputer suppliers, including some of the latest Japanese manufacturers. It is designed to aid both first time and experienced computer users in choosing a single-board microcomputer or microcomputer system to suit their application.

- Microcomputer suppliers covered include:

• AI Electronics • APF • Alpha Micro Systems • Altos Computer Systems • Apple Computer • Archives • Atari • CADO Systems • California Computer Systems • Commodore Business Machines • Compucolor • Cromemco • Data General • Digilog Business Systems • Digital Equipment • Durango Systems • Exidy • Findex • Hewlett-Packard • IBM • IMS International • Intel • Intelligent Systems • Intertec Data Systems • MicroDaSys • Micro V • Micromation • Mitsubishi Precision Co. • Motorola Semiconductor Products • NEC • National Semiconductor • North Star Computers • Ohio Scientific • Onyx Systems • Panafacom • Panasonic Company • Pertec Computer • Radio Shack • Sanyo • Seiko • Sharp • Sinclair Research • Smoke Signal Broadcasting • Sord Computer Systems • Southwest Technical Products • Tektronix • Texas Instruments • Toshiba • Vector Graphic • Wang Laboratories • Xerox • Zenith Data Systems • Zilog.

Other chapters include discussions on microcomputer theory, applications, independent software vendors and a range of display and printing terminals.

Over 600,000 microcomputers will be installed during 1981. Are you sufficiently informed on this important growth area?



Webster's MICROCOMPUTER BUYER'S GUIDE provides new insight into this rapidly expanding market. Many questions are answered including:

- What are microcomputers being used for?
- What kinds are available?
- Who is selling them?
- What major software packages are available?
- What to look out for in selecting a microcomputer?

If you are interested in keeping abreast of this very important segment of the market or are planning to purchase a microcomputer for home, office or factory use, then this Guide is of vital interest to you. For just $25 it can save you up to six months of your own research, time and effort. The publication is printed 8.2" x 10.75" and contains 326 pages.

COMPUTER REFERENCE GUIDE
135 South Harper Avenue,
Los Angeles, CA 90048. (213) 852-4886

I would like to order the **MICROCOMPUTER BUYER'S GUIDE.** The cost of the book is $25, plus $2 postage and handling.

Name ..... Company .....
Address .....
.....
Zip Code ..... Telephone ( ) .....

☐ Check enclosed ($27) OR you may use your credit card:
☐ Master Charge
☐ Visa Card No. .....
☐ American Express Expiration .....

MC Only, List 4 digits above your name .....

California purchasers please add $1.50 sales tax.
Signature
(for Credit Card) .....

Mail this coupon or a copy to:
Computer Reference Guide, 135 South Harper Avenue, Los Angeles, CA 90048. (213) 852-4886 M 7/81

✱ *This book was originally advertised as the Microcomputer Reference Handbook.*

THIS MAY BE THE MOST IMPORTANT BOOK YOU READ THIS YEAR

LETTERS TO THE EDITOR

Super Service

Being fully aware of your continuous concern for honesty, service and dependability on the part of your advertisers, I thought I would let you know of my fantastic experiences that I've had with one of your advertisers.

Aardvark Technical Services of Walled Lake, MI, has been absolutely unbelievable. Owner Rodger Olsen must have an in with the postal service. I can phone in an order on Friday and have it in Naples, FL on the following Monday.


Not only that, but you can even reach this extremely knowledgeable gentleman on the phone (at certain stated hours). I feel any mail-order house, whether it be software, hardware or whatever, can certainly enjoy success and resultant wealth by following the service product guarantee, follow-up and first-person cooperativeness demonstrated by Mr. Olsen and his associates. Our own firm's success is certainly in part due to Mr. Olsen's well-run firm.

Ron Haltermon
Vice President
Car-ron Enterprises, Inc.
Computahome Division
Naples, FL

Shorter, Quicker, but Harder to Program

Edward Rager's Scramble program (*Microcomputing*, January 1981, p. 78) sacrifices memory and execution time to shorten program development time (structured programming does the same thing).

Listing 1 is a rendering of Scramble for the TRS-80 II (Microsoft BASIC) that ate

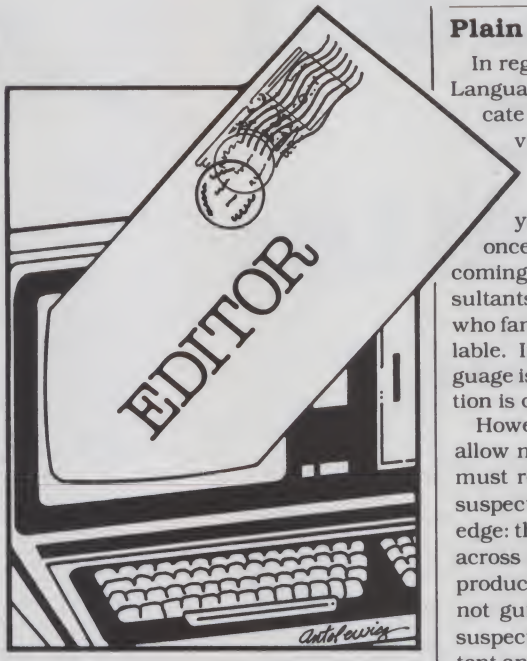

programming time to conserve memory and execution time. It generates scrambles of any word of length greater than 1 in the same order Rager's program generates them. Contrary to Rager's, it does not print the same scramble more than once when the word has repeated letters.

Since Scramble may never have been written had the programming been difficult, and I would never have revised it had the program not been written, maybe there's a place for structured programming after all.

William A. McWorter, Jr.
Mathematics Dept.
Ohio State University
Columbus, OH

```
10 DEFINTA-Z:INPUT"WORD TO SCRAMBLE";A$:N=LEN(A$):DIMP(N):B$=MID$(A$,1,1):FORI=2TON:
   T$=MID$(A$,I,1):IFINSTR(B$,T$)=0THENB$=B$+T$
20 NEXTI:M=LEN(B$):DIMF(M+1,1):FORI=1TOM:T$=MID$(B$,I,1):T=0:FORK=1TON:T=T+SGN(INST
   R(MID$(A$,K,1),T$)):NEXTK:F(I,1)=T:NEXTI:K=1
30 FORI=KTON:FORJ=P(I)+1TOM:IFF(J,0)=F(J,1)THENNEXTJ:GOTO50
40 F(P(I),0)=F(P(I),0)-1:P(I)=J:F(J,0)=F(J,0)+1:NEXTI:L=L+1:FORS=1TON:LPRINTMID$(B$,P(S),1);:NE
   XTS:LPRINT" ";:I=N:IF(L+1)*(N+1)>80THNL=0:LPRINT
50 F(P(I),0)=F(P(I),0)-1:P(I)=0:K=I-1:IFK<>0THEN30
60 LPRINT:LPRINT:RUN

TAP TPA ATP APT PTA PAT

STOP STPO SOTP SOPT SPTO SPOT TSOP TSPO TOSP TOPS TPSO TPOS OST  POSPT OTSP
OTPS OPST OPTS PSTO PSOT PTSO PTOS POST POTS

I------ -I----- --I---- ---I--- ----I-- -----I- ------I

TILLS TILSL TISLL TLILS TLISL TLLIS TLLSI TLSIL TLSLI TSILL TSLIL TSLLI ITLLS ITLSL
ITSLL ILTLS ILTSL ILLTS ILLST ILSTL ILSLT ISTLL ISLTL ISLLT LTILS LTISL LTLIS LTLSI
LTSIL LTSLI LITLS LITSL LILTS LILST LISTL LISLT LLTIS LLTSI LLITS LLIST LLSTI LLSIT
LSTIL LSTLI LSITL LSILT LSLTI LSLIT STILL STLIL STLLI SITLL SILTL SILLT SLTIL SLTLI
SLITL SLILT SLLTI SLLIT
```

Listing 1.

Plain Talk

In regard to Eric Maloney's article, "A Language of Their Own: Time to Reeducate Educators" (May, p. 26), I want to voice a hearty "amen!" to the points made. Having been a public school teacher for 16 years, I have cringed more than once at the spoken and written drivel coming from certain administrators, consultants or college of education types who fancy they are being paid by the syllable. Indeed, their misuse of the language is one of many reasons why education is constantly under the public gun.

However, since Mr. Maloney seemed to allow no exceptions to his indictment, I must remind your readership of what I suspect Mr. Maloney would acknowledge: there are many, many fine teachers across our 50 states who are in positive, productive contact with children and are not guilty of the charges in question. I suspect those teachers who are competent and confident in the classroom, feeling no need to escape to seats of greater authority, reflect the competence and confidence in simple, clear, concise language.

One more suspicion I must express. Members of other professions such as medicine and law surround themselves with a complex language *all their own*. The common citizen can only pay high fees to get a translation. But teachers deal with kids, and everybody knows that dealing with kids is no mystery, right? After all, lots of us are parents. So teaching is a simple profession—a teacher tells a kid what to do and the kid does it.

My suspicion is that maybe some members of our profession subconsciously react to these gross oversimplifications by attempting to build up our own special "Latin," *hoping to bring* about some kind of respectability they sense is missing. Unfortunately, as Mr. Maloney points out, the plan backfires.

John C. Russell
Science and Mathematics
Teaching Center
The University of Wyoming
Laramie, WY

Micro Broadcast

I am producing a weekly communications magazine program in English for the Dutch External Service which is broadcast on short-wave to a worldwide audience each Thursday.

(continued on page 195)

like the golf pros

THE STOCKING SOURCE

comes through with lower prices



- *Your Closest Link to the Manufacturer*
- *All Items Listed are Stocked*
- *We Support & Service Products Purchased From Us*

NEW EPSON Model MX-80FT List $745.



Friction Feed has been added to the popular MX-80. All other features the same, including an adjustable tractor.

Model MX-80 . . . . . List $645.
NEW — Friction Drive Kit . . . $60.



Anadex Model DP-9001 . . . List $1550.
80 Column
Model DP-9501 . . . . . List $1650.
132 Column
Unbelievable Dot Matrix Printer with All Functions Program-Accessible. Has 4-Character Font, Hi-Res Graphics, Switch Selectable Parallel, Serial & Current Loop Interface, Operator Selectable Protocal.

PRINTERS

Okidata — Microline 83 . . PRICE REDUCED

Up to 15" Paper Width, 136 Columns Standard, 132 Compressed, Vertical Tab, Top of Form, Parallel & RS-232C Interfaces & Tractor Feed Included, Friction & Pin Feed.



NEW MODELS 82A & 83A
Available soon —
9 wire Print Head & 120 CPS

Microline 82 . . PRICE REDUCED
Microline 80 . . . . . List $599.
Tractor Feed for Microline 80 & 82 . . . . . List $50.
Hi-Speed Interface for Microline 82 & 83 . . List $210.
256 Character Buffer, Expandable to 2K
RS-232C Interface for Microline 80 . . . . . List $150.
256 Character Buffer
Epson — Model MX-70 . . . . . List $445.
Bit Plot Graphic Printer, Adjustable Tractor 4 — 10 Inches, 80 CPS.



NEW–INTERFACES

Hi-Res Bit Plot Graphics for Epson Printers . . . . List $90/Set.
Plug In Prom Set
Vardon 1K Serial Interface Buffer for Epson MX-80 . . . List $175.
(Complete with Cable)
Tymac — Apple Interface Using 8th Data Bit . . . . . List $139.
(Complete with Cable)

INTERFACES

Apple Plug-In Interface & Cable . . . . . List $110.
Serial Interface & Cable List $90.
IEEE 488 Interface & Cable . . . . . List $80.
TRS-80* Expansion Interface Cable . . . . . List $35.
*A trade name of Radio Shack — Tandy Corp.
Model 232 Universal Serial Interface Cable . . . . . List $25.

NEW MONITORS

BMC & NEC — Black & White and Color



No Penalty for Credit Card Orders

NEW–PRINTER LINES

Centronics Printers In stock.
NEW–with Graphics Model 739
Model 739-1 (Parallel) - List $995.
Model 739-3 (Serial) - List $1045.
Model 704-9 (Serial) - List $1795.
Model 704-11 - List $18.70
Also Ribbons & Accessories
All other Centronics Printers are Available.

We now stock NEC Spinwriters, Models 5510, 5515, 5520, 5525 & 5530. Also Thimbles & Ribbons. All other models are available, including Band Printers.

TEST EQUIPMENT

We stock Beckman, Fluke, Global Specialties, Keithley & NLS DMM's and probles. Also Hayes Technical Breakout Boxes.

MICRO-COMPUTERS

We stock the ALTOS Computer Line Featuring Hard Disk Memory.

FURNITURE & PRINTER STANDS

Systems Furniture and Printer manufacturers

ASK FOR OUR INSTANT DISCOUNT
From Roy Hawthorne
Talk To Bill Tokar On Applications

CALL TOLL FREE
U.S.A.
1-800-521-2764
MICHIGAN
1-800-482-8393

Reminder:
We are open
8:30 to 6:00 PM EST
Monday through Saturday

WRITE TO:
"The Stocking Source" ↙288
24069 Research Drive
Farmington Hills, MI 48024
313-474-6708

↙See List of Advertisers on page 194

Right on Target With Winchester

By Martin Moore

A few years ago, the gang at IBM was sitting around thinking about information storage. They wanted a way to increase information density and reliability in a mass storage device. They decided on a new disk drive, with the ability to store 30 megabytes of data on 30 tracks.

Then, some sports-minded individual noticed that the numbers 30-30 were the same as those of the popular 30.30 rifle manufactured by Winchester. Though IBM never got around to building the 30-30, and though the specifications changed, the name stuck.

You might be asking yourself what the Winchester has to do with you, the owner of a small microprocessor-based computer. Perhaps nothing right now. But the future is a different story. Shugart Technology is already offering a 5.25-inch Winchester drive, and others are sure to follow.

But before we look at the Shugart and the events that led up to it, let's review some other forms of mass storage.

The First

Of course, the first mass storage device (aside from paper tape or punch cards) was core memory. Put a ferrite bead where two wires cross and you have a memory cell. Use 12 million beads and you can store 12 million bits of information. And, it's nonvolatile. It won't go away unless you tell it to. Add your core memory to a computer with a giant power supply, and you have a computer with mass storage—and a giant power supply.

This kind of memory is fairly reliable if you don't break a wire. In fact, core memory (Fig. 1) is still around in a lot of pre-integrated circuit computers.

There had to be a better way.

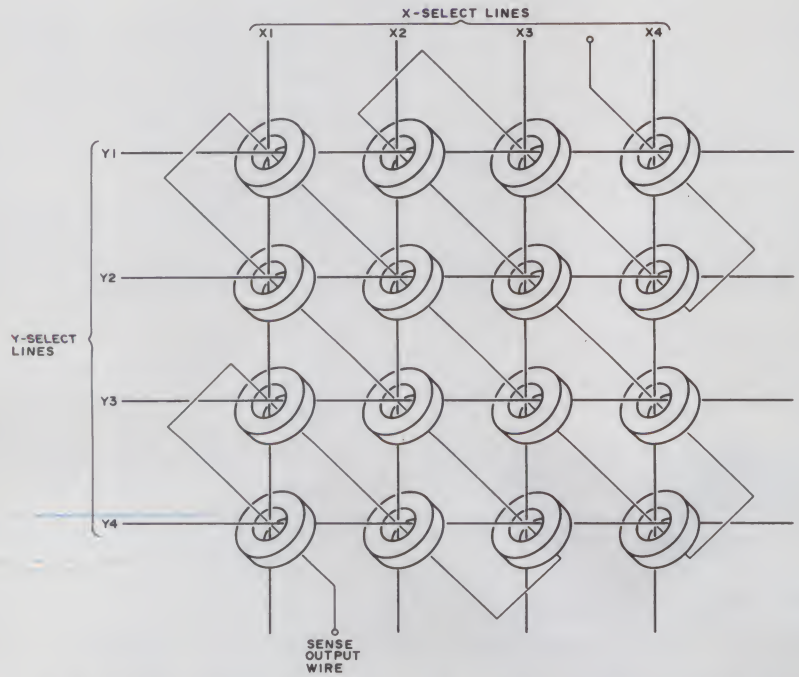


Fig. 1. The venerable ferrite-bead core memory. Each bead is selected by an XY coordinate. The state of each bead is read by the Sense Output wire.

The Oxide Way

The computer people looked around and noticed it was the 1950s, and other people were recording their voices on tape recorders. In other words, they were storing information. The computer people said to themselves, "Aha! We can do that!" And they did, on reel-to-reel, vacuum-column tape transports.

As exotic as they might look, the tape transports still work the same as your $50 portable cassette recorder. Tape leaves the reel and runs across read/write heads, and information is either recorded or played back. What changed over the years was the oxide placed on the tape, and the speed and density at which information could be stored. This, and an improvement

Martin Moore's article "Building the H-89" was Microcomputing*'s March 1981 cover story. Address correspondence to 2735 S.W. 229, Aloha, OR 97006.*

in head technology, helps the tape transport remain a valuable tool today. Some of us couldn't get along without it.

The trouble was, computers kept getting faster and faster, and tape transports couldn't keep up. What was next?

Round Tape

My fertile imagination leads me to believe that the record player was the progenitor of the disk. Information was being stored on this flat thing that went round and round, and once again someone said, "Hey, we can do that!" And they did.

Except they realized that not enough information could be stored in grooved plastic. So, they took that oxide-coated plastic from their tape transports and attached it to an aluminum platter. Then, they took the read/write head off the transport and connected it to a moveable arm. Spin the disk, put the head wherever you want it, and you've got hard disk storage. You could rapidly move the head wherever you wanted on the disk, unlike the tape transport, which had to move the tape to the head. It worked just fine.

The Hard Disk Matures

In the years since the introduction of the hard disk, technology has been at work improving it. The read/write head was refined to make it smaller and lighter. The head was attached to a stepping motor so you could place the head into the same position every time. And the medium (the oxide) improved, too.

One of the things they found was that the closer you move the head to the medium, the more densely you can record information. But the head couldn't touch the surface of the disk, because at 3600 rpm, the head would gouge out a considerable amount of oxide. But, before we go any further, let's take a side trip.

The Floppy Revolution

"Too expensive!" came the cry. The hard disk was a great idea, but couldn't something be done to lower the cost and still provide the high densities and data transfer rates? And the eight-inch floppy was born.

The idea was to put the oxide on a flexible piece of Mylar, put the Mylar inside a low-friction jacket and spin the disk inside the jacket at one-tenth the speed of the hard disk. The read/write head was placed right on the surface of the disk, while the disk spun at about 300 rpm, instead of 3600 rpm. Single-sided storage became double-sided storage, and single-density recording became double-density recording. Then, the floppy shrunk from its eight-inch diameter to a mere 5.25-inch diameter.

Shugart Associates came out with the 5.25-inch minifloppy in 1975. The price barrier of the eight-inch floppy was broken. And, we can see what single-sided, single-density 5.25-inch floppies cost today—some less than $300.

But, the story's not over. Let's go back to the hard disk to examine the technology a little, and we'll see what led to the birth of the Winchester drive.



Photo 1. The Memorex Model 101 eight-inch hard-disk drive. This drive uses Winchester Technology and a stepper motor actuator. (Photo courtesy of Memorex)

Hard Disks Aren't So Hard

Let's look at the hard disk in detail.

The basic ingredient of the hard disk drive (Photo 1) is the platter, which, at 14 or eight inches, is a precision piece of aluminum. Remember, the hard disk has to rotate at about 3600 rpm with little or no side-to-side or up and down movement. A fine coat of oxide (about 440 microinches) is bonded to the aluminum platter, making up the storage medium.

Next, you've got to spin the disk. There are two predominant ways to do this (and again, much the same technology is used in high-quality record players). One way is to spin the disk with an ac motor, driving the disk spindle (the center shaft) with a belt. The second way is to make the spindle of the disk into a dc brushless spindle-drive motor. The ac motor and belt are cheaper; the dc brushless spindle-drive motor can be held to greater speed tolerances. The better you can regulate rotation speed, the less chance of losing data.

Now that we've got the disk, let's talk about getting information onto and off of the platter.

Readin' and Writin'

The first thing we should do is look at the way data is stored on a disk.

For the purposes of this discussion, we're going to use a totally inefficient disk, shown in Fig. 2. It's inefficient because this disk is going to have only ten tracks.

Now, the number of tracks that can be used on a disk is determined by how far you have to move the read/write head before you can continue recording data. In other words, the tracks can't be so close together that the head's magnetic field destroys information on the tracks to either side of the one you're recording on. Therefore, the number of tracks on a disk is

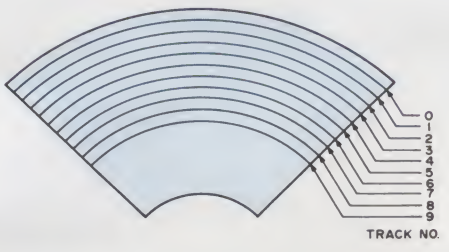


Fig. 2. This is an illustration of a portion of a simplified disk. Tracks are numbered from the outside toward the inside. Most minifloppies use 35 to 40 tracks.

determined by the intensity of the read/write head's magnetic field, and, to a smaller extent, how much control you have over the placement of the read/write head. The drawing in Fig. 2 is highly exaggerated, of course. The single-density 5.25-inch drive in my home computer has 40 tracks, spaced 0.02083 inches apart.

The read/write head is mounted on the end of an arm. The arm moves from the edge of the disk to the center of the disk in small, repeatable steps. Repeatable is the key word. You have to be able to put the head back onto the center of the track every time.

There are two primary methods (with variations) of moving the head to the proper location over the track: stepper motor and voice-coil actuator.

The stepper motor has been around for quite some time, and is usually implemented in one of two ways. The first is the lead screw method shown in Fig. 3. As the stepper motor increments its way in one direction or the other, it turns the lead screw, which moves the head in or out from the center of the disk. There's a third mechanism connected to the head carriage that forces the head up and away from the disk surface (unloading the head). Floppy disk drives let the head rest right on the disk during read or write. Hard disk drives, on the other hand, never (well, hardly ever) let the head touch the surface of the disk. More on that later.

Another method of using the stepper motor involves band actuators shown in Fig. 4. As the stepper motor rotates, the bands on the actuator push the head carriage to the center of the disk, or pull it away. Again, another mechanism serves to load and unload the head.

The chief limiting factor in using stepper motors is wear. As the motor wears, the step increments may change, and the head can't be positioned properly over the track. There's no feedback to the drive controller to tell it where the head's at. This is called an open-loop positioning method, and the reason stepper motor drives require periodic head alignment. How do you get around this? The voice-coil actuator.

The voice-coil actuator is a closed-loop system. That is, the controller always knows the position of the head. Without getting into detail, it works in this way.

First, no stepper motor is used to position the head. Instead, a linear motor is used. The linear motor can move the full length of its travel without stopping, or can move to any point along the way and stop. A comparison can be made between a pulse-jet engine (the stepper motor) and a constant thrust rocket (the linear motor). The stepper motor moves in small increments, or bursts, while the linear motor moves smoothly throughout its range.

When you use the stepper motor, you simply tell the motor to move n number of steps in one direction or another, and it's a fairly safe bet that the motor did just that. You can't tell that to a linear motor. The linear motor requires constant control and is made up of a cylindrical, permanent magnet, with a hole bored down through the center (see Fig. 5). Within this hole is placed a coil on a shaft. Attached to the shaft is the actuator arm carrying the read/write head.

So, how do you control the linear motor? With the disk!

Each track on the disk contains header, sync and data information, just as a stepper-motor-actuated disk does. In voice-coil-actuated drives, each track also contains servo information permanently impregnated on it by the disk manufacturer. As the voice-coil actuator moves the head across the disk, the servo information tells the controller where the head is, and the controller moves the actuator accordingly, closed-loop. With a stepper motor actuator, the drive control-

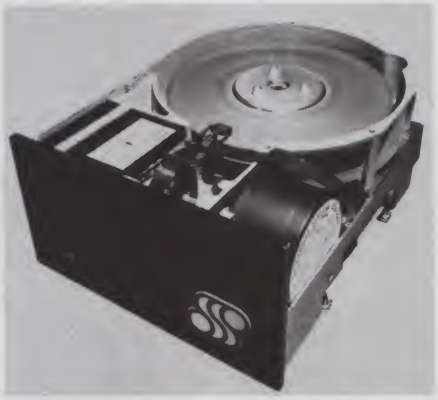


Photo 2. The first 5.25-inch Winchester Technology disk drive. This is Shugart Technology's ST500. (Photo courtesy Shugart Technology)

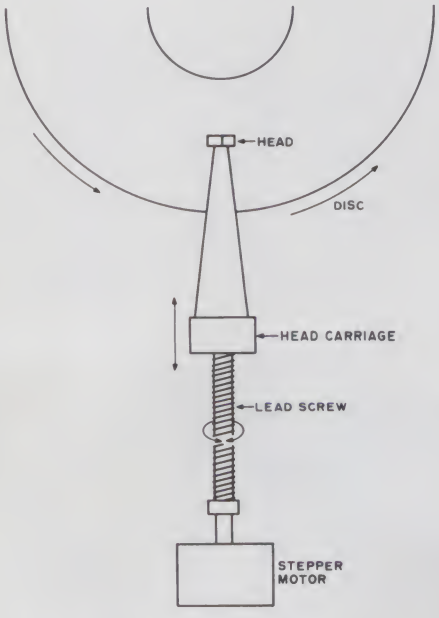


Fig. 3. The lead screw/stepper motor actuator. As the stepper motor turns, the lead screw pushes the head toward or away from the center of the disk.

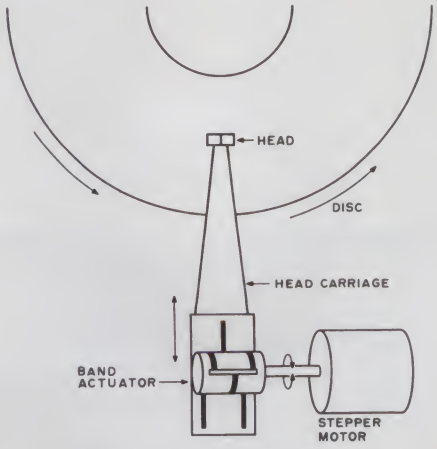


Fig. 4. The band actuator uses bands connected to the hub of the stepper motor to move the head carriage.


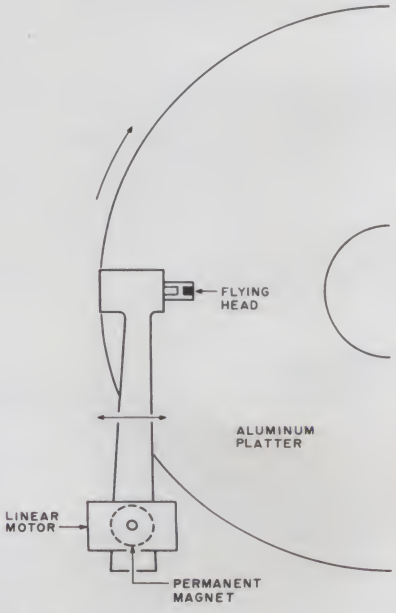


Fig. 5. The linear motor actuator. A moveable coil inside a fixed permanent magnet lets the arm move in a linear fashion.

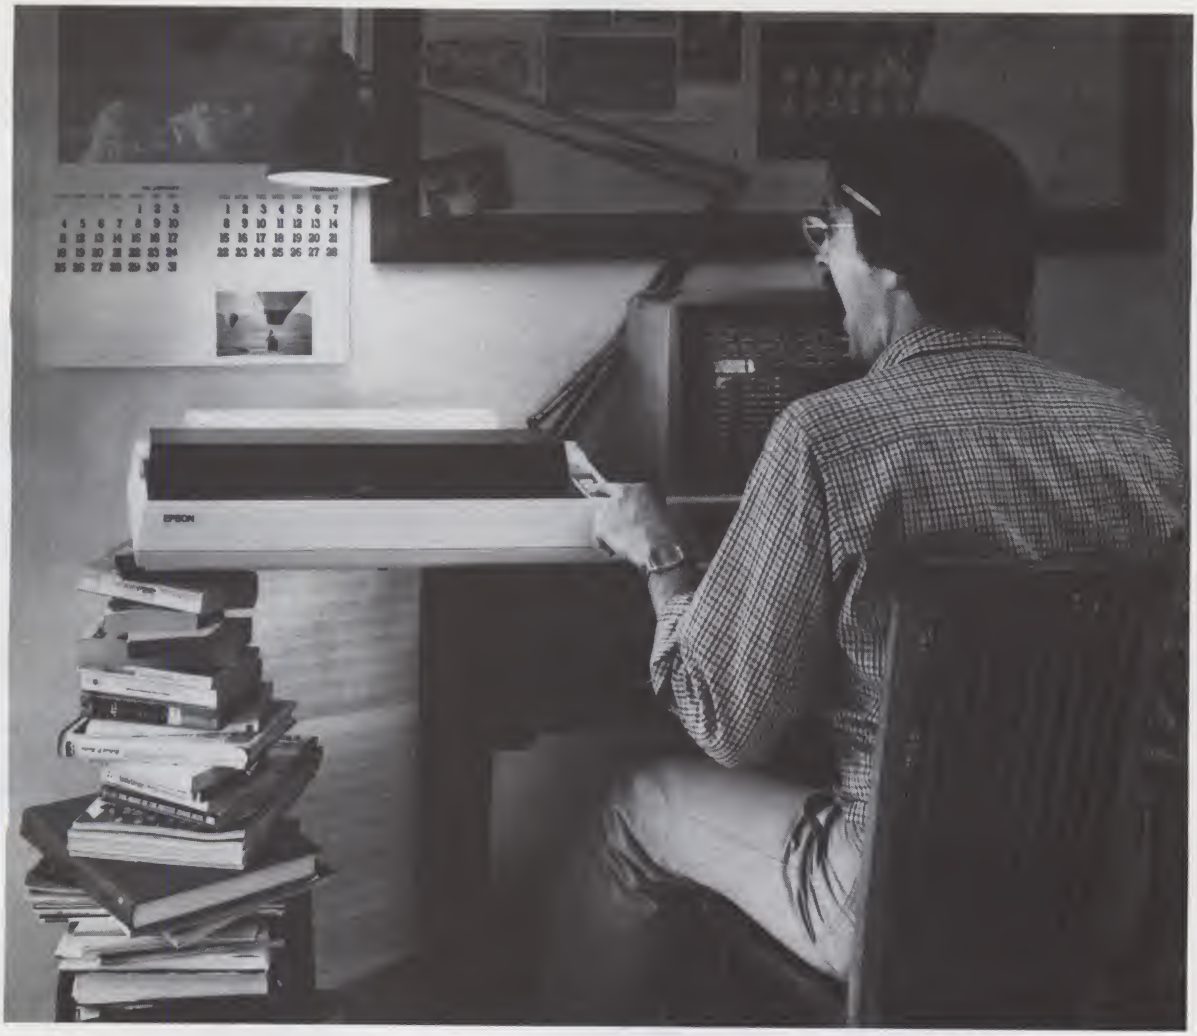

The MX-100. Not just better. Bigger.

Epson.

Our MX-80 was a pretty tough act to follow. I mean, how do you top the best-selling printer in the world?


Frankly, it wasn't easy. But the results of all our sleepless nights will knock your socks off.

The MX-100 is a printer that must be seen to be believed. For starters, we built in unmatched correspondence quality printing, and an ultra-high resolution bit image graphics capability. Then we added the ability to print up to 233 columns of information on 15" wide paper to give you the most incredible spread sheets you're ever likely to see. Finally, we topped it all off with *both* a satin-smooth friction feed platen *and* fully adjustable, removable tractors. And the list of standard features goes on and on and on.

Needless to say, the specs on this machine — and especially at under $1000 — are practically unbelievable. But there's something about the MX-100 that goes far beyond just the specs; something about the way it all comes together, the attention to detail, the fit, the feel. Mere words fail us. But when you see an MX-100, you'll know what we mean.

All in all, the MX-100 is the most remarkable printer we've ever built. Which creates rather a large problem for those of us at Epson.

How are we going to top this?



Your next printer.

EPSON

EPSON AMERICA, INC.

23844 Hawthorne Boulevard • Torrance, CA 90505 • (213) 378-2220

✓116

See the whole incredible Epson MX Series of printers at your Authorized Epson Dealer.

✓See List of Advertisers on page 194

ler tells the motor where to move, and then takes it on blind faith that the head arrived. With the voice-coil actuator, the controller knows exactly where the head is.

Are there drawbacks to the voice-coil actuator? Of course. The biggest drawback is that each piece of track taken up by servo information is that much less track you can put information on. And, the servo information forces the disk to be hard-sectored (each track contains a set number of sectors, and each sector contains a set number of data bytes).

But these drawbacks are reduced because of the amount of information you can store on the disk (increased head positioning accuracy equals decreased track-to-track spacing). Don't expect your 5.25-inch floppies to use voice-coil actuators, because they simply use up too much valuable storage space.

What have we got so far? Well, we've taken a brief glance at the development of the hard and floppy disks, and we've explored the various methods of moving a head back and forth on a disk. Next, let's look a little closer at the joining of the head and disk.




Fig. 6. This illustration shows the size relationships of a flying head and contaminants.

The Magnetic Interface

Let's go back and review the way the head is positioned on the disk. Remember that the floppy disk drive places its head right down on the disk. This is only possible because the disk is rotating at about 300 rpm. The rotation speed, plus the type of oxide and lubricant used, limits how fast you can retrieve information from a floppy disk.

The hard-disk drives are another story. To spin the disk at 3600 rpm (thus improving data access time), the head can't touch the disk. Instead, the head "flies" above the disk on a cushion of air. For you pilots, this is the ground effect. In common hard-disk technology, the flying head rests on its cushion of air about 45 micro-inches (1.4 microns) above the disk surface. For reference, a human hair is about 3 milli-inches in diameter. The distance, along with its built-in problems, is shown graphically in Fig. 6.

As you can see, almost anything is bigger than the gap between the flying head and the oxide surface of the disk. This is why you'll notice loud no smoking signs in computer rooms that contain hard-disk drives. And this is also why hard disks are transported in plastic containers. If a particle of almost anything contaminates the disk, it will undoubtedly cause what's known as a head crash. In other words, something on the disk bashed into the head. The resulting data loss can be mighty frustrating.

This brings us right back to the folks at IBM, who were sitting around trying to figure out how to get more information on a disk. As it turns out, if you can get the head even closer to the disk, you can store more information faster. Move the head closer, reduce the magnetic field, increase *the number of tracks* per disk. No doubt, someone said, "If we move the head closer, anything larger than a hydrogen atom will cause a head crash." "True," might have said another, "but what if we don't let anything touch the disk? What if we seal the whole thing up?" Thus was born Winchester Technology.


Back to Where We Were

If you were to take a regular hard-disk drive, adjust the head from a 45 micro-inch gap to about an 18 micro-inch gap, seal the whole drive in an airtight container, pump all the dirty air out and replace it with inert gas or filtered air, you'd have yourself a Winchester Technology disk drive. That's the whole thing in a nutshell. The mechanical part of a Winchester drive is about the same as a normal hard-disk drive. Except that you can't remove the disk. It's in there permanently, although some people are working on that, too.

So, hard-disk drives come in two categories: removable disk (normal drive) and fixed disk (Winchester drive).

What's so great about Winchester Technology? Well, you can store more information on the same size

The Epson MX-80 Dot Matrix Printer.



ONLY $490.00
Interfaces to TRS-80, APPLE, PET, and others.

C. ITOH Starwriter Printer
Parallel 25 CPS ONLY $1499.
Serial 25 CPS ONLY $1580.

LEXICON LEX-11
MODEM ONLY $125.

Scotch 3M Diskettes
8 SSSD 10/ $2.90 50/ $2.80
5 1/4 SSSD 10/ $2.80 50/ $2.70

Prices subject to change

J.C. Datatron
P.O. BOX 305 ⌐203
Massapequa NY 11758
(516) 798-7448
FOB MASSAPEQUA, NYS RES. ADD SALES TAX. ALLOW 3 WKS FOR DELIVERY.

Too Much!

How can we tell you about 200 products in one advertisement?

How much money have you invested in your personal computer? Certainly enough that you want to get as much out of it as possible. That's where we come in.

Our new catalog gives detailed descriptions of over 200 peripherals, software packages and books. We believe that to make an intelligent purchasing decision you need as much information as possible. You need more than can fit into a short ad. You need screen photos of software, not just a glowing description. You need technical details about peripherals.

You'll find this kind of detail in our new 48-page catalog. It's unique in the small computer field. Best of all, it's **FREE**.

To get your free copy, circle our number on the reader service card or send your name and address to the address below. Can't wait? Then call our toll-free number **800-631-8112**.

Peripherals Plus
119 Maple Ave., Morristown, NJ 07960
⌐98

disk, and you get better data access time. Sealing the whole thing up increases reliability. All of these are a definite plus.

Does it have any drawbacks? What doesn't? The term fixed disk is the key. At this writing, that disk is in there to stay. The only place a disk can be removed is in the manufacturer's clean room. This means that if the disk crashes, you can't pull it out and replace it with a backup. You have to bite the bullet and send the whole drive out for repair. For this reason, manufacturers are scrambling to come up with a way to back up information that is stored daily on the disk. Some methods involve:

- A dual disk drive: one Winchester and one removable.
- A Winchester backed up by a tape cartridge unit.
- Winchester-to-Winchester backup.

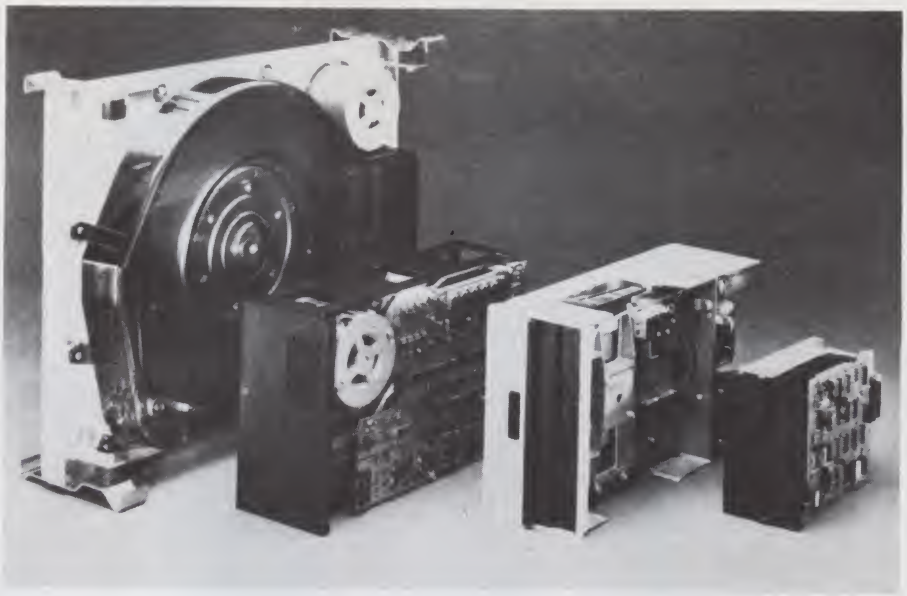


Photo 3. The full line of Shugart Associates disk drives, ranging from a 14-inch hard disk down to their 5.25-inch minifloppy. Shugart Associates plans a 5.25-inch Winchester of their own, to be called the SA500. (Photo courtesy of Shugart Associates)

At Last, the 5.25-inch Winchester

In the early 1970s, a gentleman by the name of Alan Shugart had a better idea. The eight-inch flexible disk drives had been around for a while, and Shugart decided they were too big and expensive. So he, along with a few cohorts, formed Shugart Associates, and invented the 5.25-inch minifloppy. The price tag was about half that of the eight-inch drive, and the market was ripe. His 5.25-inch drive brought high-speed mass storage to the small-computer owner.

Then, in 1975, Shugart turned over the reins of Shugart Associates, and went into consulting—until lately, that is. It seems Shugart had another better idea. He started another com-

LOBO Add-On Disk Drive Subsystems

For Apple, TRS-80, S-100 Based Computers



Expansion and **enhanced capabilities** are key words in achieving full utilization of your computer system. Our complete line of LOBO disk drive subsystems are the ideal, cost-effective way to provide the expansion capabilities you need to meet your system growth requirements. All of our subsystems are complete, thoroughly-tested, 100% burned-in, and feature a 1 year 100% parts/labor warranty.

APPLE *Double Density Controller

3101	Minifloppy, $399 3101I Minifloppy w/interface card $489
8101CA	One SA800 in cabinet w/power, DDC* Controller, cable and manual $1449
8202CA	Two SA800 in cabinet w/power, DDC* Controller, cable and manual $1889
5101CA	One SA850 in cabinet w/power, DDC* Controller, cable and manual $1759
5202CA	Two SA850 in cabinet w/power, DDC* Controller, cable and manual $2364
LCA-22	Double Density Controller only $599

S-100 BASED COMPUTERS

MODEL NO.	DESCRIPTION
4101C	SA400 in cabinet w/power $369
8212C	Two SA801 in cabinet w/power $1329
5212C	Two SA851 in cabinet w/power $1799

GENERAL

MODEL NO.	DESCRIPTION
8212C	Two SA801 in cabinet w/power $1329
5212C	Two SA851 in cabinet w/power $1799

TRS80

MODEL NO.	DESCRIPTION
4101C	SA400 in cabinet w/power $369
8101C II	One SA800 in cabinet w/power for Mod. II $909
8202C II	Two SA800 in cabinet w/power for Mod. II $1349
LX80	Double density expansion interface $641
RS232	Dual Serial Port Option $75

master charge THE INTERBANK CARD

VISA®

JR INVENTORY CO.,

P.O. Box 185, Santa Ynez, Ca., 93460

(805) 688-8781

126

See List of Advertisers on page 194

EAST COAST

ΩMEGA Sales Co.
12 Meeting St.
Cumberland, RI 02864
1-401-722-1027

1-800-556-7586


ΩMEGA SALES CO.

WEST COAST

ΩMEGA Sales Co.
3533 Old Conejo Rd. #102
Newbury Park, CA 91320
1-805-499-3678
CA. TOLL FREE 1-800-322-1873

1-800-235-3581

SPECIAL OF THE MONTH




ATARI 800 32K & EPSON MX-80 PRINTER w/ INTERFACE & CABLE


BOTH FOR $1449

with ATARI 810 DISK DRIVE
with LEEDEX/AMDEK COLOR-1 13" MONITOR
COMPLETE SYSTEM $2,222






ANADEX $1295



DIABLO 630 $2099
Tractor option $245



NEC 12" MONITOR $229



$399 OKIDATA MICROLINE-80

ATARI 800 32K	**$779**
EPSON MX-80	**$479**

- **WE ACCEPT C.O.D.'S**
- **NO SURCHARGE FOR CREDIT CARD ORDERS**
- **ALL EQUIPMENT FACTORY FRESH W/MFT.WRNTY.**
- **STOCK SHIPMENTS SAME DAY OR NEXT**
- **NO HIDDEN CHARGES!!!**

INTERTEC SUPERBRAIN 64K RAM	$2799
QD SUPERBRAIN	$3195
NEC 5510 SPINWRITER	$2595
NEC 5530 SPINWRITER	$2595
OKIDATA MICROLINE-80	$ 399
OKIDATA MICROLINE-82	$ 529
OKIDATA MICROLINE-83	$ 799
APPLE II PLUS 48K	$CALL
APPLE DISK w/3.3 DOS Controller	$CALL
APPLE DISK w/o Controller	$CALL
BASE II PRINTER	$ 599
HAZELTINE 1420	$ 799
NORTHSTAR HORIZON II 32K QD	$2975
ANADEX DP-9500	$1295
TELEVIDEO 912C	$ 669
TELEVIDEO 920C	$ 729
TELEVIDEO 950	$ 959
CBM 8032 COMPUTER	$1475
CBM 8050 DISK DRIVE	$1449
CBM 4032 COMPUTER	$1090
CBM 4040 DISK DRIVE	$1090
CBM 4022	$ 679
CBM VIC-20	$ 289
CBM C2N	$ 85
RADIO SHACK II 64K	$3245
RADIO SHACK III 16K	$ 839
LEEDEX/AMDEK 100	$ 139
LEEDEX/AMDEK 100G	$ 169
LEEDEX/AMDEK COLOR-1 13" Color Monitor	$ 349
MICROTEK 16K RAMBOARD for ATARI	$ 99.95
MICROTEK 32K	$ 165
ATARI 400 16K	$ 349
ATARI 825 PRINTER	$ 619
ATARI 850 INTERFACE	$ 139
or both together	$ 749
ATARI 810 DISK DRIVE	$ 449
(Call for price list of ATARI software)	

PRICES ARE SUBJECT TO CHANGE WITHOUT NOTICE.

VISA **EAST COAST / WEST COAST** master charge

ΩMEGA SALES COMPANY

89



Shugart Technology's ST500 series 5.25-inch Winchester disk drive system. (Photo courtesy Seagate Technology)

pany, this time called Shugart Technology, and designed a 5.25-inch Winchester disk drive. In May of 1980 his Winchester drive was introduced to the world at the National Computer Conference. Let's take a look at this little Winchester.

Shugart Technology's ST500 5.25-inch Winchester

What are its capabilities? Just for fun, let's compare the Shugart Technology Winchester drive with the 5.25-inch floppy drive in my home computer. My drive is listed on the left in Table 1, and is a ten-sector, single-density, single-sided, 40-track drive.

It's impressive, isn't it?

The Shugart Technology ST500 mini-Winchester contains two 5.25-inch disks and four heads. The ST500 uses a stepper motor with a band actuator to position the heads. The disks are driven by a brushless dc motor that spins the disks at 3600 rpm. The large storage space of the ST500 gives the drive about 15 times the capacity of a double-sided floppy at only three times the price.

The ST500 mini-Winchester uses 153 tracks on each side of its two disks. Track-to-track access time is three ms. Maximum track access time is less than one-half second, with the average time being 170 ms. The spindle drive motor controls the rotation speed of the disks to within ±1 percent. Finally, at shutdown, a brake stops the disks within 15 seconds.

The ST500 seals the dirty air out and filters its own air in a closed loop filtration system. Shugart Technology claims that the calculated mean-time-between-failure (MTBF) is 8000 hours of operation.

ST500 Interface

The ST500 uses a very simple interface scheme that closely resembles the interface to most common floppies:

- Four drive select lines
- Two head select lines
- Step control line
- Direction control line
- Track 00 indicator
- Seek complete indicator
- Index indicator
- Ready indicator
- Reduce write current control line
- Write gate control line
- Write fault indicator
- MFM write data line
- MFM read data line
- power (+12 V dc & +5 V dc)

The Bottom Line

What's the bottom line? Well, Shugart Technology is offering the ST500 for $925 in quantities of 500. The single unit price is about $1400. But not to worry. BASF and Control Data have both stated that they'll have 5.25-inch Winchesters available in early 1981. More good news is that Texas Instruments has decided to second-source the ST500. And, word has it that Shugart Associates is also going to market a 5.25-inch Winchester.

Shugart Technology is the only manufacturer right now, but as the others come on line, the price should drop. (Does anyone remember the HP-35 calculator and its original $395 price tag?) Western Digital is reported to be designing a controller that will handle two ST500 drives.

At any rate, you can expect to see a lot more 5.25-inch Winchester drives within the next few years. The drive is nearly perfect for low-cost applications in things like word processors and your home computer.

Should you buy one? I don't know. But I do know it will be well worth looking into. Keep your eyes open. ■

	5.25-inch floppy	ST500 5.25-inch Winchester
Unformatted data capacity	109 Kbytes	6.38 Mbytes
Average access time	370 msec	170 msec
Data rate (bits/second)	140 Kb/s	5 Mb/s
Time to full rotation speed	1 second	15 seconds
Power required	+12 and −5	+12 and −5
Power consumption	14 watts	22 watts
Size	3.25×5.75×8	3.25×5.75×8

Table 1. Shugart Technology compared.

Shugart Technology, the manufacturer of the ST500 5.25-inch Winchester drive, has recently announced a name change. The company is now called Seagate Technology, 360 El Pueblo Road, Scotts Valley, CA 95066.



**Tubes are the rage in today's automated office,
but many workers fear that there is more to a VDT than meets the eye.**

Video Display Terminals

Are They Hazardous to Your Health?

By Eric Maloney
Microcomputing staff

Video display terminals have arrived with a vengeance. Some seven million workers use them each day, and that figure will reach ten million by the middle of the decade. An International Resource Development report says that one out of every three white collar desks will have a terminal by the end of the 80s. Another million or so are being used by microcomputerists for home and business applications.

But as is the wont of American culture, we have perhaps embraced this new technology without first studying all of the implications. Employers and manufacturers have suddenly been beset by workers who claim that VDTs are neither safe nor healthy. Operators, their unions and scientists now say that poorly designed terminals in an ill-conceived work place can cause a variety of physical problems, including visual impairment, stress, musculoskeletal problems, anxiety and fatigue. Others speculate that non-ionizing microwave radiation from the terminals might contribute to cataract development and birth defects.

"The technology has just become so widespread," says Alan Fischer, program director of the Michigan AFL-CIO's Safety and Health Program. "It definitely is the wave of the future. But as in so many other areas, the technology has become widely used before we really know the effects."

Workers have responded on a number of fronts. In 1977, two copy editors at *The New York Times* charged that their VDTs had caused cataracts, and took the case to arbitration. A year later, typists at the United Nations refused to work on word processors for fear of radiation. More recently, workers at Blue Shield of California went on strike over, among other things, VDT health issues. And in Canada, a government worker claimed that VDTs had caused cataracts which had resulted in her blindness, and took her case to the Workmen's Compensation Board.

The questions concern not just the possible effects VDTs might have on the user's body and mind. They also involve such larger issues as the relationship between the worker and his or her work, and the amount of control the worker has over his or her environment. The situation, as several people have pointed out, is similar to that which existed earlier in this century, when automation came to the factories. The new technology will certainly benefit the employer, but what about the employee?

To a degree, microcomputerists are on the fringes of the maelstrom. Those who use micros in the home have much more control over the work environment. But if the home computerist isn't careful, he can face the same problems as his office counterpart. And as more businessmen and educators use micros at their place of work, the problems inherent to any VDT will become more evident.

As VDTs once again prove, no burgeoning technology comes without a price. But some solutions do exist, if people will spend the time, effort and money to recognize them.

Microwave Madness

On Feb. 26, 1981, the New York Workers' Compensation Board ruled that a New York Telephone Company worker had died of exposure to microwave radiation. And though NYT has appealed the case to the Appellate Court of New York, the board's decision has far-reaching implications—it is the first time that an official body has recognized chronic exposure to microwave radiation as a cause of death.

According to the *Microwave News*, Sam Yannon worked with low-power radio transmitters on the 87th floor of the Empire State Building from 1954 to 1969. He started to get headaches in 1964, and by 1968 was experiencing fatigue, eye trouble, sleep problems, forgetfulness and clumsiness. By the time he died in 1974, Yannon weighed less than 70 pounds, and had lost almost all sight, memory, speech and motor coordination. Yannon was 62 years old.

The decision is sure to stimulate vigorous debate. The scientific community is a caldron of opinion and controversy, and has made no exception for microwaves. Does the proliferation of microwave-generating technology—broadcasting equipment, radar, VDTs, television sets and ovens, to name a few—threaten the health of the general public? Both sides have their outspoken advocates.

The text of the appeal decision provides a microcosm of the debate. On the one hand, says the text, Dr. Milton Zaret found that Yannon "suffered an extreme case of microwave or radiowave sickness which resulted ultimately in his death." On the other hand, Dr. Paul Tyler "stated that... he finds no relationship between claimant's microwave exposure and diseases found and that he disagrees with Dr. Zaret's diagnosis."

Another doctor concluded that Yannon died of Alzheimer's Disease (premature aging) and found "no material indicating a relationship between microwave exposure and Alzheimer's Disease or cataract formation or causal relationship between claimant's work and his disability or death."

The Board ultimately sided with Zaret; Yannon's wife, Nettie, received $29,000 in retroactive awards and a pension of $45 a week for life.

The lack of consensus is due largely to the fact that U.S. scientists haven't done enough research on the subject. Microwave radiation, which falls roughly between 10 MHz and 100 GHz in the electromagnetic spectrum, is nonionizing, which means that it does not alter the cell structure in living organisms. Most of the attention has been given to ionizing radiation, whose effects on life in the form of nuclear weapons is much more dramatic. (See sidebar "Ionizing Radiation and VDTs.")

The perspective of much of the American scientific community is captured nicely in an article titled "Tests of Microwave Radiation Produce No Adverse Effects on Primates," in the May 1981 issue of *Research Resources Reporter*. The article begins by reporting that 12 test monkeys showed "no harmful effects" after microwave exposure. Project director Dr. Robert McAfee is quoted as stating that "In people, cataract formation is the only well-documented injury caused by microwaves...."

Later, the author asserts that "while physical and mental stresses may occur during low-intensity radiation, these effects are transient and do not indicate permanent injury." The article further states that an experiment involving rats showed "minor changes in red and white blood-cell counts," but that these changes were "not considered significant."

And yet, while the article asserts that microwaves are harmless, it also admits that there are some areas in which scientists confess complete ignorance. For example, one test showed higher levels of sulfhydryls, which are "involved in the activities of various enzymes." The scientist who conducted the test says that "Not only the health significance but also the biochemical mechanism through which this occurs is not understood."

Dr. Leonard R. Solon, in an article in the *Bulletin of the Atomic Scientists*, takes a different approach. While he says that the studies so far have been "incomplete and inconclusive," he states that observed reactions in humans include subjective complaints, biochemical or hormonal imbalances and hematological changes. He also points out that animal research has shown central nervous system impairment, chromosomal and genetic anomalies, cellular changes, behavioral alterations, prenatal impairment of body and brain weight and blood-brain barrier alterations.

A growing number of scientists are

Ionizing Radiation and VDTs

By Dr. Gordon W. Wolfe

The term "radiation" these days produces almost a knee-jerk response of "danger!" in the uninformed layman. What most people fail to realize is that radiation can be harmful, benign or even helpful. Radiation is more than just fallout from nuclear bombs. Sunlight is radiation—so are the radio waves from your CB radio or local television station. What makes some radiation harmful, and other radiation not harmful?

The key to understanding radiation is to understand its effects on matter. Matter as we know it is composed of atoms, which group together as molecules. Each atom consists of many heavy particles (called nucleons) grouped together in the center of the atom (called the nucleus), and a cloud of electrons in orbit around it (see Fig. 1). These electrons, according to quantum physics, can only occupy special positions, or orbits. They *cannot exist* between these special orbits.

When an electron jumps from a higher orbit to a lower one, it gives off light. This is the ultimate source of all light, which is a form of radiation. The process works in reverse, too.

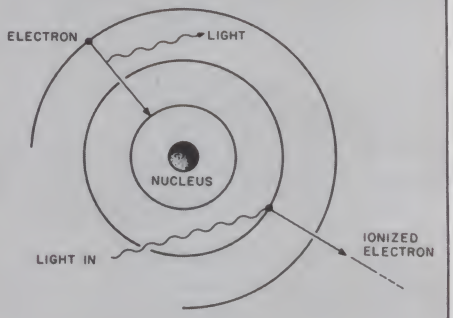


Fig. 1.

Light, or other radiation, can strike an electron, and cause it to jump from a lower orbit to a higher orbit. This process is called excitation. But the light has to have exactly the right amount of energy to cause the transition. It must have the same energy as the difference of the energies between the two orbits—too little and it can't make the jump; too much, and it would jump beyond the special orbit to a forbidden region.

If the radiation has enough energy, it can cause the electron to jump completely out of the atom. When this happens, the atom is ionized, and the radiation is called ionizing radiation. If an atom is excited, its chemical bonding properties (controlled by the

Address correspondence to Dr. Gordon W. Wolfe, Physics Department, University of Mississippi, University, MS 38677.

(Continued on page 46.)


MODEL II



26-4002
64K 1 Drive
$3440.00

26-4160 1 Drive Exp.....$1034.00
26-4161 2 Drive Exp.....1574.00
26-4162 3 Drive Exp.....2114.00
26-4530 Scripsit II.....265.00
26-4512 Profile II.....162.00
26-4511 Visicalc II.....265.00
26-4501 Gen Ledger.....180.00
26-4506 Mail List.....72.00

PRINTERS



CENTRONICS

BEST PRICES

Fast 100 CPS Centronics
730-1A Printer.....$577.00
Text Quality Centronics
737-1 Printer.....$737.00

$ DISCOUNT $

TRS-80®

DEALER A301

COMPUTER SPECIALISTS

CALL US. . .
SAVE MONEY


We carry the full line of TRS-80 Computers. All other R.S. software, furniture, and accessories at discount from catalog price. We stock most items to assure you fast delivery and save you money.

26-1140 Expansion Interface.....$249.00
26-1141 16K Exp. Interface.....359.00
26-1142 32K Exp. INterface.....469.00
26-1145 RS232C Board.....84.00
26-1160/1 Mini Disk Drive.....419.00
26-1563 Scripsit-Disk.....79.00
26-1566 Visicalc.....83.00

* * * * * **PRINTERS** * * * * *

26-1155 Quick Printer.....187.00
26-1167 9½ Dot Matrix Printer.....360.00
26-1166 Line Printer VI.....1080.00
26-1158 Daisy Wheel II.....1799.00
26-1165 Line Printer V.....1710.00

Pocket Computer




26-3501 1.9K P.C.....$221.00
26-3503 Cassette IF.....45.00
14-812 Recorder.....72.00

MODEL III



26-1061 4K I.....$629.00
26-1062 16K III.....865.00
26-1063 32K III
W/2 Drives, RS232.....2225.00

COLOR



26-3001 4K.....$353.00
26-3002 16K Ext. Basic.....533.00
26-3008 Joysticks.....22.50
26-3010 Color Video.....353.00
26-1206 Recorder.....54.00

commodore

AUTHORIZED DEALER
CALL FOR PRICES

ALL POCKET AND COLOR COMPUTER SOFTWARE SOLD AT DISCOUNT

WRITE US FOR A
FREE CATALOG

1-800-841-0860 Toll Free Order Entry

MICRO MANAGEMENT SYSTEMS, INC.

100

No Taxes on Out Of State Shipments

Immediate Shipment From Stock on Most Items

DOWNTOWN PLAZA SHOPPING CENTER
115 C. SECOND AVE. S.W.
CAIRO, GEORGIA 31728
(912) 377-7120 Ga. Phone No. & Export

TRS-80 is a registered trademark of the Tandy Corp.

R.S. 90 Day Limited Warranty
F-48 Form Provided

Largest Inventory In The S.E. U.S.A.

See List of Advertisers on page 194

willing to grant the possibility that microwaves in sufficient doses can contribute to the problems Solon mentions. But for the most part, they agree that the evidence is too flimsy to sound a general alarm.

The Soviet Union, on the other hand, has done much comprehensive microwave research, and their standards are stricter. Paul Brodeur, in his book *The Zapping of America*, says that the Russians have identified such problems as headaches, eye pain, stabbing pains in the heart, dizziness, irritability, emotional instability, depression, diminished intellectual capacity, partial loss of memory, loss of hair, hypochondria, loss of appetite, alterations in normal brain wave patterns, hallucinations, changes in cardiovascular functions, changes in blood pressure, changes in protein composition of blood, shifts in white-blood-cell counts, cataracts, increased thyroid activity, sterility and decreased lactation.

The Soviet Union sets a limit on microwave radiation of 10 microwatts per square centimeter, 1000 times lower than the U.S. standard of 10 mW/cm^2. They also discourage people with cardiovascular abnormalities from working in areas where they might be exposed to microwaves, prohibit microwave generators from areas where other work is being performed and require that antennas be directed to avoid irradiating people using them.

Brodeur suggests that the Soviet standards are stricter because of a greater understanding of what microwave radiation is. He says that U.S. scientists have focused almost entirely on thermal effects (those visible to anyone who has ever used a microwave oven) while ignoring possible nonthermal effects.

Solon agrees. "Not all investigators accept the validity of athermal biological effects," he says, "contending that such effects are attributable to microscopic heating." But if such effects are a reality, he says, they would be produced below 1 mW/cm^2, much lower than the current American standard.

Enter VDTs

There is no question that video display terminals emit low levels of nonionizing microwave radiation. The question is, how much? And even if the levels are below recognized safety standards, can we guarantee their safety, given the limited knowledge

(Continued from page 44.)

electrons) are changed. If an atom is ionized, it is no longer part of the molecule, and the chemistry of the molecule changes.

Radiation, then, if it has enough energy, can cause chemical changes in a substance. If the radiation has high enough energy, it can cause changes in the structure of the nucleus, and actually change the type of the atom from one element to another, although the probability of this happening is millions of times smaller than that of causing chemical changes.

In terms of affecting living tissue, we are speaking of changing the chemical structure of the living cell. Usually, in a living cell, the DNA pattern has the blueprint for the cell so that repairs can be made. If the DNA itself is slightly damaged, the RNA can usually repair it. Only when the DNA is heavily damaged, as in a massive dose of ionizing radiation, does the cell die or repair itself imperfectly. This latter case can lead to cancer.

Ionizing radiation comes in two forms: electromagnetic waves and charged particles. We have already seen how electromagnetic radiation (light, for example) works. Charged particles produce an electromagnetic field by their motion, which can also affect electrons. The faster (more energetic) the particle, the more electrons it can affect.

It all depends on the energy of the ionizing radiation. There must be sufficient energy in each particle of the radiation to ionize, or at least significantly excite, the electrons of the atoms.

This excitation or ionization energy is measured in electron volts, which is the amount of energy an electron picks up by falling through a potential difference of one volt. It is a very small amount of energy—only 1.6×10^{-19} joules (one joule acting in one second is one watt of power). It usually takes between one and ten electron volts to ionize an atom.

Table 1 shows the various types of electromagnetic waves, ranked in order of increasing frequency. This is the range of the electromagnetic spectrum. The only difference between light, radio and X-rays is the frequency of the wave. The numbers given are order-of-magnitude estimates for the center of the ranges.

As you can see, electromagnetic waves do not ionize matter until you get into the ultraviolet range, and it is only the high-energy ultraviolet, X-rays and gamma rays that can really be considered to be dangerous. Infrared and visible light can also affect molecular structure.

The dividing line between infrared and microwave is very vague. Microwaves (usually only those of very high frequency) can affect only inter- and intra-molecular vibrations and rotations. (Microwave ovens heat food by causing water molecules to vibrate in resonance to the radiation. This will only happen at one very precise frequency. No other frequency will affect water.) Radio waves, even VHF and UHF, have little effect on matter at the atomic level.

Charged particles are also ranked by their energies. Particles from accelerators or reactors are usually measured in millions of electron volts. X-ray machines make X-rays by accelerating electrons through hundreds of thousands of volts (giving them hundreds of thousands of electron volts of energy) and allowing them to stop suddenly on a tungsten anode, releasing much of their energy as X-rays.

(Continued on page 50.)

Wave type	Wavelength	Average energy (electron volts)	Effects on matter
Radio	1000m–10cm	0.0001	none at atomic level
Microwave	10cm–1mm	.01	fine, small molecular effects
Infrared	1mm–.001mm	.1	excites molecular structure
Visible light	7×10^{-4}m–3×10^{-4}m	1	excites electrons
Ultraviolet	10^{-4}m–10^{-7}m	10	ionizes outer electrons
X-rays	10^{-7}m–10^{-11}	1000	ionizes inner electrons
Gamma rays	10^{-12}m–10^{-15}m	10^6	excites nucleus

Table 1.

THE ORIGINAL MAGAZINE FOR OWNERS OF THE TRS-80™* MICROCOMPUTER

* TRS-80™ IS A TRADEMARK OF TANDY CORP.

SOFTWARE FOR TRS-80™ OWNERS

H & E COMPUTRONICS INC.

MONTHLY NEWSMAGAZINE FOR TRS-80™ OWNERS

MONTHLY NEWSMAGAZINE
Practical Support For Model I, II & III

- PRACTICAL APPLICATIONS
- BUSINESS
- GAMBLING • GAMES
- EDUCATION
- PERSONAL FINANCE
- BEGINNER'S CORNER
- NEW PRODUCTS
- SOFTWARE EXCHANGE
- *MARKET PLACE*
- QUESTIONS AND ANSWERS
- PROGRAM PRINTOUTS

. . . . AND MORE

NOW IN OUR 4th YEAR

PROGRAMS AND ARTICLES PUBLISHED IN RECENT ISSUES INCLUDE THE FOLLOWING:

- FINCALC - A COMPLETE FINANCIAL APPLICATIONS PACKAGE
- INFORMATION SYSTEM REVIEW
- STATISTICAL COMBINATIONS
- PASCAL'S TRIANGLE
- ASSEMBLY LANGUAGE FOR BEGINNERS
- DISK FILES
- MOD-III REVIEW
- KEYBOARD THUNDER AND LIGHTING EXPLAINED
- DOS COMMANDS IN LEVEL II
- PROBABILITY CURVE GENERATOR
- CALCULATOR SIMULATIONS
- THE MEGABYTE GAP
- STOCKS AND BONDS
- BUDGET ANALYSIS (FOR BUSINESS AND HOME)
- NEWDOS/80 REVIEW
- DUTCHING - THE HORSE SYSTEM THAT CAN'T LOSE
- A SIMULATED GOLF GAME
- CONTINUOUS FORM SOURCES
- TAX SAVER REVIEW

. . . . . AND MORE

FREE* WITH YOUR SUBSCRIPTION OR RENEWAL — **FINCALC** A Complete Financial Analysis Package Used To Calculate Markup, Margin, Annuities, Compound Interest, Nominal And Effective Rates, Sinking Funds, Mortgage Calculations, Future Value, Savings and Insurance, Percentage Difference Between Two Numbers, Amortization Schedule and More . . . . . .

SEND FOR OUR NEW 64 PAGE SOFTWARE CATALOG (INCLUDING LISTINGS OF HUNDREDS OF TRS-80™ PROGRAMS AVAILABLE ON CASSETTE AND DISKETTE). $2.00 OR **FREE** WITH EACH SUBSCRIPTIONS OR SAMPLE ISSUE

*** All programs are supplied on cassette (add $3 for Diskette Version - add $5 for modified Mod-II Version).**

COMPUTRONICS INC. MATHEMATICAL APPLICATIONS SERVICE™ ↙6

50 N. PASCACK ROAD
SPRING VALLEY, NEW YORK 10977

ONE YEAR SUBSCRIPTION $24 .....
TWO YEAR SUBSCRIPTION $48 .....
SAMPLE OF LATEST ISSUE $ 4 .....
START MY SUBSCRIPTION WITH ISSUE.....
(#1 - July 1978 • #12 - June 1979 • #24 - July 1980 • #30 - January 1981)
NEW SUBSCRIPTION..... RENEWAL.....

NEW TOLL-FREE ORDER LINE
(OUTSIDE OF N.Y. STATE)
(800) 431-2818

NEW!!! MOD-II NEWSLETTER $18/year (or 12 issues)

VISA · master charge · AMERICAN EXPRESS

24 HOUR ORDER LINE
(914) 425-1535

CREDIT CARD NUMBER _____ EXP. DATE _____

SIGNATURE _____ NAME _____

ADDRESS _____ CITY _____ STATE _____ ZIP _____

***** ADD $12/YEAR (CANADA, MEXICO) - ADD $24/YEAR AIR MAIL - OUTSIDE OF U.S.A., CANADA & MEXICO *****

↙See List of Advertisers on page 194

"Employers are facing a different kind of concern, from pregnant workers afraid that VDTs might harm their unborn children."

of the scientific community?

The issues were first raised in 1977, when two editors at *The New York Times* developed cataracts. One was 28 and the other 35. They visited Dr. Milton Zaret, a Scarsdale doctor with a reputation for tilting at established ophthalmological windmills, who told the editors that their "bilateral incipient radiant-energy cataracts" were caused by microwave radiation from their video display terminals.

The National Institute for Occupational Safety and Health (NIOSH) took radiation measurements and determined that the VDTs posed no health problem. The arbitrator decided against the two editors. But the cataract reports continued to come in.

"We've had a fairly large number of cataracts," says David Eisen, director of research and information for The Newspaper Guild. "I'm talking about a dozen, which may not sound like a large number, but it is when you consider that it's happening to people in their 20s with no medical problems and no family history of cataracts."

Eisen says that the latest case involves a 25-year-old wire service reporter who has been working on VDTs for two years.

"But we've had people who've developed cataracts after only eight or nine months," he says.

The Guild serves some 32,000 members in the U.S. and Canada. Eisen estimates that perhaps 10,000 use VDTs.

"Certainly they're spreading; in the newsroom, of course, but also in circulation and advertising departments," he says.

Also recently, the Ontario, Canada, Workmen's Compensation Board ruled against a 40-year-old employee at the Ministry of Transportation and Communications, who worked on VDTs for 19 months before cataracts were discovered.

Most scientists agree that microwave radiation can cause cataracts. But, says the *Research Resources Reporter* article, the levels required are at least ten times the U.S. standard of 10 mW/cm², far higher than any measurements taken from VDTs. Zaret disagrees, claiming in a *Washington Post* article that he has seen over 100 cases of cataracts caused by radiation less than 10 mW/cm².

Many unions and employers are facing a different kind of concern, from pregnant workers who are afraid that VDTs might harm their unborn children. In mid-1980, a story broke that four former employees in the advertising department of the *Toronto Star*, all of whom had worked on VDTs, had given birth to children with congenital defects.

"The *Toronto Star* situation remains unexplained," says Gary Cwitco, health and safety officer for the Communications Workers of Canada (CWC). "While many officials and any number of scientists have said that the terminals were not responsible, they can't tell us what was."

Cwitco points out that the odds of such a high number of birth defects in one place at one time are "quite small."

"We have had a lot of colloquial reports which we've tried to follow up, but no clusters like at the *Star*," he says.

Alan Fischer says his union, too, has become concerned about the possible effects of VDTs on the fetus.

"Lots of union leaders have come to us with this problem," he says. "They have a member who's pregnant and using a VDT. Well, it's a scientific fact that radiation causes birth defects. But there's no conclusive evidence on low-level radiation. And there's no law saying that the employer has to take the woman off the VDT. So there's no place she can go to; she has to depend on the good graces of the employer."

Fischer won't speculate on whether VDTs are, in fact, a danger to pregnant women. "But if I were a pregnant worker—perhaps even if I were a male who was trying to impregnate my wife—I would try to get moved temporarily to another job."

The *Toronto Star* situation did cat-

Visit Your Heathkit Electronic Center*

where Heathkit Products are displayed, sold and serviced.

PHOENIX, AZ
2727 W. Indian School Rd.
602-279-6247

ANAHEIM, CA
330 E. Ball Rd.
714-776-9420

CAMPBELL, CA
2350 S. Bascom Ave.
408-377-8920

EL CERRITO, CA
6000 Potrero Ave.
415-236-8870

LA MESA, CA
8363 Center Dr.
714-461-0110

LOS ANGELES, CA
2309 S. Flower St.
213-749-0261

POMONA, CA
1555 N. Orange Grove Ave.
714-623-3543

REDWOOD CITY, CA
2001 Middlefield Rd.
415-365-8155

SACRAMENTO, CA
1860 Fulton Ave.
916-486-1575

WOODLAND HILLS, CA
22504 Ventura Blvd.
213-883-0531

DENVER, CO
5940 W. 38th Ave.
303-422-3408

AVON, CT
395 W. Main St. (Rt. 44)
203-678-0323

HIALEAH, FL
4705 W. 16th Ave.
305-823-2280

PLANTATION, FL
7173 W. Broward Blvd.
305-791-7300

TAMPA, FL
4019 W. Hillsborough Ave.
813-886-2541

ATLANTA, GA
5285 Roswell Rd.
404-252-4341

CHICAGO, IL
3462-66 W. Devon Ave.
312-583-3920

DOWNERS GROVE, IL
224 Ogden Ave.
312-852-1304

INDIANAPOLIS, IN
2112 E. 62nd St.
317-257-4321

MISSION, KS
5960 Lamar Ave.
913-362-4486

LOUISVILLE, KY
12401 Shelbyville Rd.
502-245-7811

KENNER, LA
1900 Veterans Memorial Hwy.
504-467-6321

BALTIMORE, MD
1713 E. Joppa Rd.
301-661-4446

ROCKVILLE, MD
5542 Nicholson Lane
301-881-5420

PEABODY, MA
242 Andover St.
617-531-9330

WELLESLEY, MA
165 Worcester Ave.
617-237-1510

DETROIT, MI
18645 W. Eight Mile Rd.
313-535-6480

E. DETROIT, MI
18149 E. Eight Mile Rd.
313-772-0416

HOPKINS, MN
101 Shady Oak Rd.
612-938-6371

ST. PAUL, MN
1645 White Bear Ave.
612-778-1211

BRIDGETON, MO
3794 McKelvey Rd.
314-291-1850

OMAHA, NE
9207 Maple St.
402-391-2071

ASBURY PARK, NJ
1013 State Hwy. 35
201-775-1231

FAIR LAWN, NJ
35-07 Broadway (Rt. 4)
201-791-6935

AMHERST, NY
3476 Sheridan Dr.
716-835-3090

JERICHO, L.I. NY
15 Jericho Turnpike
516-334-8181

ROCHESTER, NY
937 Jefferson Rd.
716-424-2560

N. WHITE PLAINS, NY
7 Reservoir Rd.
914-761-7690

CLEVELAND, OH
28100 Chagrin Blvd.
216-292-7553

COLUMBUS, OH
2500 Morse Rd.
614-475-7200

TOLEDO, OH
48 S. Byrne Rd.
419-537-1887

WOODLAWN, OH
10133 *Springfield Pike*
513-771-8850

OKLAHOMA CITY, OK
2727 Northwest Expressway
405-848-7593

FRAZER, PA
630 Lancaster Pike (Rt. 30)
215-647-5555

PHILADELPHIA, PA
6318 Roosevelt Blvd.
215-288-0180

PITTSBURGH, PA
3482 Wm. Penn Hwy.
412-824-3564

WARWICK, RI
558 Greenwich Ave.
401-738-5150

DALLAS, TX
2715 Ross Ave.
214-826-4053

HOUSTON, TX
1704 W. Loop N.
713-869-5263

SAN ANTONIO, TX
7111 Blanco Road
512-341-8876

MIDVALE, UT
58 East 7200 South
801-566-4626

ALEXANDRIA, VA
6201 Richmond Hwy.
703-765-5515

VIRGINIA BEACH, VA
1055 Independence Blvd.
804-460-0997

SEATTLE, WA
505 8th Ave. N.
206-682-2172

TUKWILA, WA
15439 53rd Ave. S.
206-246-5358

MILWAUKEE, WI
5215 W. Fond du Lac
414-873-8250

*Units of Veritechnology Electronics Corp. CP-199

You'll be a little richer after building one of these.



H-19 Professional Video Terminal




H-11A 16-Bit Computer with Dual Floppy Disk Storage



H-8 Personal Computer with Dual Floppy Disk Storage



H-89 All-In-One Computer with Floppy Disk Storage



H-14 Serial Printer



Self-Instruction for Assembly and BASIC Programming

Richer in knowledge
Once you build your own computer, you'll know it inside out. You'll know how to make it work for you, how to make it grow as your skills grow.

Richer in savings
Build-it-yourself kits cost less – about 30% less than comparable assembled computers. And you'll probably never need to pay someone for service because no one will know your computer better than you.

Is it hard?
Not at all. Heath makes it simple with easy-to-assemble designs and with step-by-step manuals that guide you from unpacking to final plug-in. And a Heathkit helping hand is always just a phone call away.

Innovative software
Heath offers you innovative programs for running your home or business, and exciting games for your family. You can have Microsoft™ BASIC™, one of the most powerful and widely used languages.

Heath User's Group (HUG) will share with you a library of over 500 programs to make your computer serve you in ways you never imagined.

Complete hardware
Choose from three computer systems:

The H89 All-In-One Computer gives you everything in one compact, convenient unit.

The flexible H8 gives you the freedom to combine memory and interfacing for exactly the system you require.

And the powerful H11A gives you 16-bit power for your most complex programs.

The Heathkit line includes video terminals, matrix and letter-quality printers and a complete selection of accessories. You'll even find award-winning self-instruction packages to teach yourself programming in BASIC or Assembly.

FREE CATALOG



It's all in the new 104-page Heathkit Catalog, along with nearly 400 electronic kits for your home, work or pleasure. Send for your free catalog today, or pick one up at your Heathkit Electronic Center.*

Heathkit®

*Visit your Heathkit Electronic Center in the U.S. or Canada where Heathkit Products are displayed, sold and serviced. See your white pages for the location nearest you. Heathkit Electronic Centers are units of Veritechnology Electronics Corporation in the U.S.

236

Write to Heath Company, Dept. 351-794, Benton Harbor, MI 49022
(In Canada write Heath Company, 1480 Dundas St. E., Mississauga, Ont. L4X 2R7)

CP-186

alyze one workers' action. Four pregnant workers at Bell of Canada participated in a work boycott this spring, expressing fear that their use of VDTs could harm their unborn children. The CWC argued to Bell that it was better to be on the safe side, and the company agreed. The four workers were allowed to take other work or ask for an early maternity leave.

"It's a significant decision for two reasons," says Cwitco. "First, it deals with a particular problem that our members are concerned about and gives them recourse. And second, it recognizes in the absence of definitive knowledge that we should take some action until the questions are answered."

Union health officials are showing a variety of responses to the radiation question. Some, like Fischer, feel that the focus on radiation might detract from other issues.

"Everyone is hung up on the radiation aspect of VDTs," he says. "The fact is that we're not going to find out about that for years to come."

David LaGrande of the Communications Workers of America (CWA), which numbers some 300,000 VDT operators among its 625,000 members, expresses similar sentiments. "We have not seen any evidence coming from the scientific community here—or in Europe, where the standards are much more stringent—which would cause us to believe that radiation emissions are a defined problem. That's not to say that no problem exists; until scientific testing, there *is* a possibility of significant emissions. But we're not really active in that area, except to suggest to the scientific community that they continue their testing."

Cwitco, on the other hand, does not believe that the radiation issue has been overplayed.

"An awful lot of people are running around saying that there's no radiation whatsoever, and that's simply not true," he says. "Any number of tests have been done that have shown very high readings. And each time the agency for one reason or another has said that the readings were spurious."

San Francisco Story

At the moment, the most well publicized study is one done by NIOSH in the Bay Area. Several unions asked NIOSH to investigate the San Francisco Newspaper Agency, the S.F. *Chronicle*, the S.F. *Examiner*, the Oakland *Tribune* and Blue Shield of California "to evaluate potential health hazards from the use of video display terminals. . . in information processing applications."

In each case, NIOSH reports that "exposure to x-ray, radio-frequency, ultraviolet and visible radiation was well below current occupational exposure standards, and, in many cases, below the detection capability of the survey instruments." The highest level found was 0.65 uW/cm², on an Ontel OP-1/64 terminal.

Another study, done by the Food and Drug Administration Bureau of Radiological Health and reported in the April 1981 *FDA Consumer*, concludes that "VDT's [sic] emit little or no harmful radiation under normal operating conditions; the emissions that are detectable are well below any existing national and international standards."

The article says that microwave emissions were "more than 100 times below the maximum level allowed under exposure guidelines set by the American National Standards Institute."

(The ANSI standard, though under reconsideration at press time, is 10 mW/cm²; thus, the FDA findings would be around 100 uW/cm², which, contrary to the previous quote, is ten times higher than the Soviet limits.)

(Continued from page 46.)

Whenever a charged particle is stopped quickly, it gives off radiation in the form of *bremsstrahlung*. The faster it was going or the quicker it stops, the more radiation it gives off.

What does all this have to do with video display terminals? The central fact is that video displays are a source of fast charged particles, and are a means of stopping them quickly. In Fig. 2 is a diagram of the CRT (cathode ray tube) display, which can either be an oscilloscope screen or a TV picture tube. At the far end is a source of electrons, which accelerates the electrons from a hot wire through a typical potential of 10,000 V. These accelerated electrons are deflected by a strong electric potential in an oscilloscope, or by a magnetic field in a television tube, to the screen of the CRT. The pattern of the beam deflection gives the characters and lines you see on the screen.

On the screen, they strike a phosphor and give off light. The pattern is repeated 30 times a second, retracing the whole figure, so you see a stable trace or picture. The deflecting voltages are small, and may be ignored for the purposes of this argument.

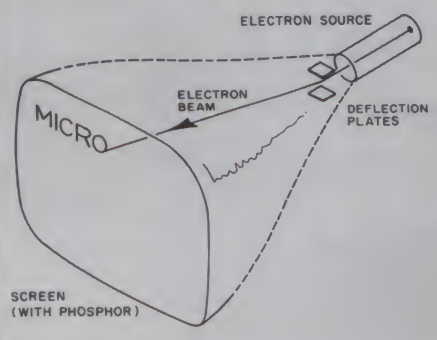


Fig. 2.

Notice that we have electrons (charged particles) with an energy of 10,000 electron volts. If this energy were converted to a single X-ray, it would be a very strong one indeed. Fortunately, two things prevent the user of a display terminal or TV from dying of radiation poisoning.

First, the probability of producing an X-ray is very small. It is much easier to simply ionize a few thousand atoms. The electrons thus released then jump back into their orbits, giving off thousands of harmless little bursts of light.

Second, if an X-ray is produced, that X-ray still has to go through the phosphor, the glass walls of the tube and several feet of air. Recall that an X-ray is ionizing radiation, and it will ionize every atom it comes into contact with. A glass tube is billions of atoms thick, and the X-ray will lose a few electron volts to every atom in its path. It never even makes it half way through the glass. It's much like trying to drive a car through a football stadium filled to the top bleachers with basketballs. (The simile is more representative if we make the stadium the size of New Mexico, and only put two gallons of gas in the car.)

It must be stated that I am speaking here only of the *immediate* effects of radiation. We are still learning about the long-term cumulative effects of small doses. But we all get a small dose (about 200 millirem per year) just from sunlight and our normal surroundings.■

MEMOREX

WHY SPEND MORE WHEN YOU CAN'T BUY BETTER? BUY MEMOREX FLEXIBLE DISCS FROM PACIFIC EXCHANGES AND SAVE.




For Data Reliability—
Memorex
Flexible
Discs

CALL FREE FOR PRICES & INFORMATION

(800)235-4137

In California, (805)543-1037

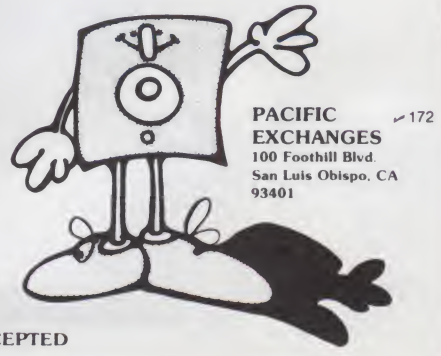

PACIFIC EXCHANGES ✓172
100 Foothill Blvd.
San Luis Obispo, CA
93401

DEALER INQUIRIES INVITED VISA master charge C.O.D.'s ACCEPTED

✓See List of Advertisers on page 194

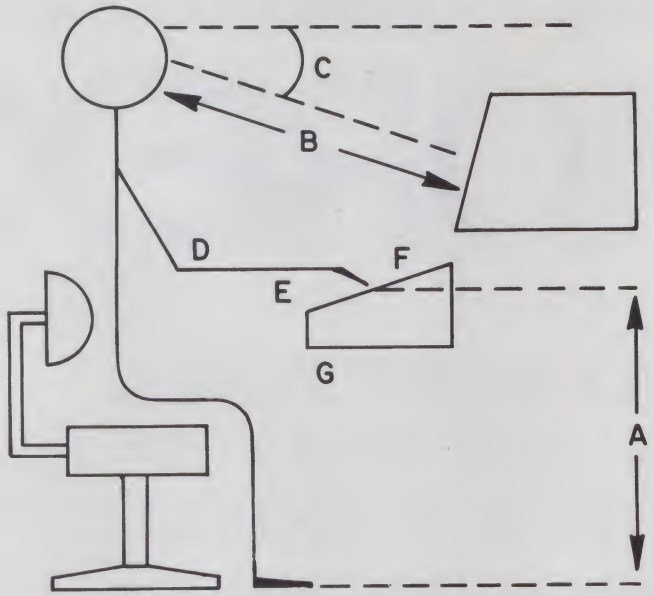


Fig. 1. These recommended work station specifications are taken from the National Institute for Occupational Safety and Health's San Francisco report:
a. The European recommendation for the height of the home row keys is 28-1/4 to 29-1/2 inches. The U.S. military standard is 29-1/4 to 31 inches.
b. The viewing distance should be between 17-1/4 and 19-3/4 inches, with a maximum of 27-1/2 inches.
c. Generally, the center of the screen should be at a position between 10 and 20 degrees below the horizontal plane at the operator's eye height. One researcher recommends that the top of the screen be below eye height, another that the top line of the display be 10–15 degrees below the horizontal with no portion of the screen at an angle greater than 40 degrees below the horizontal.
d. One researcher recommends that the angle between the upper and lower arms be between 80 and 120 degrees.
e. The angle of the wrist should be no greater than 10 degrees.
f. The keyboard should be at or below elbow height.
g. Don't forget enough room for your legs.

But these figures raise more questions than they answer. Measurements showed radiation below permissible levels, but are those levels low enough? Do we know for certain that there are no harmful long-term or athermal effects from low levels of microwave radiation? What does the FDA mean by "normal operating conditions"—can VDTs, like microwave ovens, become greater hazards as they deteriorate with age?

Louis Slesin, editor of the *Microwave News*, sums up the quandary: "Every time I think that the radiation effects are not serious, out comes another story that suggests there is a problem. Frankly, I haven't made up my mind yet."

Terminal Illness

In the long run, radiation might prove to be a significant health hazard to VDT operators. But in the meantime, a spate of other serious problems has captured the attention of users, unions and researchers.

The NIOSH study at Blue Shield of California, for example, reported a wide variety of health complaints among VDT operators. Some 90 percent said they had experienced pain or stiffness in the neck or shoulders during the last year, 89 percent reported headaches, 88 percent complained of back pain and 83 percent had endured periods of severe fatigue or exhaustion. Users also suffered myriad eye problems, including eyestrain (93 percent), tearing or itching (79 percent), burning (77 percent) and blurring (78 percent).

NIOSH considered any complaint reported by at least 50 percent of those surveyed to be a potential health problem. That figure was met in 35 of 59 areas.

Physical problems such as those found at Blue Shield paint only part of the picture. Many VDT operators are undergoing a great deal of psychological and mental stress. This is true particularly with clerical and secretarial positions. According to the NIOSH report, "Operators reported higher levels of anxiety, depression, anger and confusion," as well as irritability and tension.

The factors that contribute to both psychological and physical problems are many and complex. The study of these factors, and how they can be minimized to create a healthier and more productive work environment, is called ergonomics (from the Greek roots *ergon*, work, and *nemein*, to manage). Ergonomic research can be roughly broken down into two major areas: the work place design and management, and equipment design.

The work-place environment is perhaps the more important of the two. As Harold Snyder, president of the Human Factors Society and professor at Virginia Polytechnic, emphasizes, "No matter how good you design a piece of equipment, if you mount it in a poorly designed work place, you're going to have problems."

A prime concern of VDT operators and their unions is that employers are placing production considerations ahead of the operator's sense of purpose. By putting its workers in front of terminals eight hours a day and establishing strict production quotas, the employer turns the VDT into what Fischer calls "an assembly-line boob tube."

Gwen Wells, research director at the Office and Professional Employees Union (OPEU), likens the rise of the automated office to the rise of factory automation in the 30s.

"Today, offices are becoming like factories," she says. "Those things that make office work appealing just aren't there anymore. Workers don't have the same kind of involvement and interpersonal relationships. There's no opportunity to gain advanced skills to be promoted. People see it as a dead end."

David LaGrande echoes Wells' sentiments:

"Their job is being made much simpler on the one hand, but job stress problems enter the picture. Surveys by the Newspaper Guild show that for many of its members, the VDT is a positive change. I think we would see it that way as well.

"But clerical workers have very little work-space control. The pacing is determined by machines. It's almost a factory-like situation."

The problems caused by the kind of work being done are often aggra-

vated by the physical conditions under which the VDT operator must function. Many offices have poor lighting. Work stations are often positioned so that VDTs reflect glare from windows and lights. Light-colored, high-reflectance surfaces can raise illumination levels, and can also cause eyestrain as the operator glances from a dark video screen to a bright background.

The work-station design is a source of many problems. Excessive keyboard height can lead to muscle fatigue. Improper viewing distance and angle of vision can force the operator into awkward and stressful positions. Solving one problem will often create another—lower the keyboard, and, if the keyboard is not detachable, you also lower the terminal. Finding the proper balance isn't always as easy as it sounds (see Fig. 1).

By itself, a poor working environment is difficult for workers to overcome. Throw in improperly designed equipment, and the problems multiply dramatically. And such equipment has, to this point, been the rule rather than the exception.

Start with the video display. A major complaint of users has been excessive glare. This comes from a variety of sources, including lights and windows, the clothing of the operator and objects behind him or her. The user must not only squint to see the image, but must also continually refocus as his or her eye moves from the reflection to the display. The result is a great deal of eyestrain.

> "Manufacturers can call anything an antiglare filter and meet the union's requirements when in fact they are creating more eyestrain."

There are several ways to cut down on glare, says NIOSH researcher Dr. Marvin Dainoff. Unfortunately, he adds, manufacturers often choose an inexpensive method, which can create as many problems as it solves. Smoked plexiglass and etched glass will both reduce glare, he says, but they also degrade the image.

"You can achieve the same thing with a pair of sunglasses," he says.

Mark Parish of Optical Coating Laboratory, which markets several nonglare panels, concurs.

"The eye is essentially a servo mechanism," he says. "It searches for an image until it locks onto what the mind wants it to. With an unfocused image, the eye simply won't lock on."

Parish adds: "The unfortunate thing is that they [the manufacturers] can call anything an antiglare filter and meet the unions' requirements when in fact they are creating more eyestrain."

The color of the screen can also be a factor, although what color is best is still subject to debate.

"There are a number of different recommendations, and they're usually contradictory," says Dainoff. "A couple of studies from Europe indicate that green is a little better than

ADD DISK DRIVES TO YOUR MODEL III AND MODEL I

ANADEX • TI • APPLE • VERBATIM



$599

(includes Disk Drive)

Fully compatible with Radio Shack's operating system TRSDOS.

- One, two, three, four drive configurations.
- 134K to over 1 Meg of storage
- 40 track and 80 track available
- 90 day warranty, 100% parts and labor
- Extended warranty available

Complete upgrade includes one mini-disk drive, power supply, controller, and mounting hardware. IMMEDIATE DELIVERY.

	OUR PRICE	RADIO SHACK	SAVINGS
Complete one drive kit	$599.	$849.	29%
Additional internal drive	265.	399.	34%
External drive	299.	499.	32%
80 track drives (inc. patch)	add 195. ea.	N/A	
16K memory (required to use drives)	49.	119.	59%
Model III 32K w/VR Data two drive assembly	1812.	2380.	24%
RS232 Adapter Board	75.	99.	25%

WE DISCOUNT RADIO SHACK & OTHER COMPUTER PRODUCTS

To order call toll free (800) 345-8102, or (215) 461-5300 in PA.

CENTRONICS • NEC • OKIDATA • EPSON



$299*

We've broken through the three hundred dollar barrier.

- Fully compatible with TRSDOS™
- Fully compatible with RS Drives
- Easy plug-in installation
- Rigid extender board
- 90 day warranty — 100% parts and labor
- Extended warranty available — $45/year
- Choice of Tandon or MPI drives

* Includes power supply, enclosure, single sided — 40tk drive and **EXTENDER BOARD**

1 sided 80 tk - $419 2 sided 40tk - $419

2 sided 80tk - $549

MONTHLY SPECIALS

Centronics 739	$750.00
Microline 80	$425.00
Lexicon Modem	$135.00

PRICES SUBJECT TO CHANGE WITHOUT NOTICE

PUBLISHED PRICE REFLECTS CASH DISCOUNT

VR Data, a manufacturer of innovative computer products, is known worldwide for quality, dependability and prompt, personal service since 1972.

VR Data corp

VISA master charge

VR Data Corporation • 777 Henderson Boulevard • Folcroft, PA 19032

See List of Advertisers on page 194

black and white, that yellow is a little better than green. But the difference is probably too small to be important."

Synder prefers black on white "because the glare problem is effectively eliminated. Also, the eye is operating at a much more efficient range because it is adapted to a higher luminescence level."

Keyboards, too, have caused problems for operators. If the keyboard is too thick, the operator might have to raise his or her arms to a less comfortable position. If the keyboard is not detachable, the operator again faces problems trying to place him- or herself properly in relation to the keyboard and terminal.

Researchers also point out that people vary in body size and proportion; a single standard station isn't possible. The keyboard and terminal heights might be perfect for one person and unacceptable for another.

Finally, manufacturers and employers often don't recognize that some people have specific problems that must be addressed. Dainoff points out, for instance, that people over age 45 get presbyopia—a loss of elasticity in the eye that causes an inability to focus on nearby objects—and must wear bifocals. If the terminal is not adjusted properly, the person must strain his or her neck to look through the bottom part of the lenses. This can cause serious musculoskeletal problems.

As workers and their unions become more vocal about these conditions, they turn to the bargaining table for possible solutions. And this raises another, this time political, issue: how much input should the worker have in the design and function of the work place?

Employers often argue that concessions to union demands will reduce efficiency. But, says LaGrande, this is not the real reason for their reticence.

"I think it primarily has to do with how much control workers have over the work place," he says. "If workers get something like rest breaks, they've established an awful lot of control."

This control is being demanded by workers who've traditionally been on the periphery of the labor movement—clerical workers, typesetters and the like. These people have often been too fearful of losing their jobs to complain about poor working conditions.

Employers aren't going to give in without a struggle. Thus, unions will often receive only partial concessions to contract demands.

But as Dr. Steven Sauter, a psychologist with the University of Wisconsin's Department of Preventive Medicine, points out, "It is absolutely mandatory that anyone thinking about installing VDTs consider the human engineering factors. Otherwise, they're guaranteed to have problems down the road, even under the best of circumstances."

And this usually means lending a sympathetic ear to the complaints and suggestions of employees.

Some Solutions

Everyone agrees that solutions exist. But they depend on two key factors.

First, employers must be willing to recognize the advantages of proper working conditions, and must be willing to spend some money to provide them.

Second, manufacturers must provide well-designed equipment.

Is management responding? The answer is a qualified "yes."

"Management by and large tends to play down the seriousness of the problem," says David Eisen. "At every stage of the game they've tended to say that there is no problem, or it is a little problem, or that the problem is being solved, or some variation of that argument. Their position is that little or nothing needs to be done.

"I suppose it's understandable if you take a narrow, self-interest point of view. VDTs are critical to their operation; they modernize production, they increase productivity immensely. Anything that threatens them is going to get a knee-jerk reaction."

"Some have been responsive," says Gwen Wells. "But when they put a machine in the office, they put them there to increase production, and that's what they're concerned

Tips for VDT Users

The National Institute for Occupational Safety and Health indicates in its San Francisco study that a number of steps can be taken to minimize ergonomic problems in the office. Many of their recommendations can also easily apply to the home work environment.

☐Operator chairs should be adjustable in height and have back rests. Back rests should be adjustable to the lumbar region (mid-back).

☐Work stations should have a place for operators to rest their wrists and forearms. Armrests should be removeable.

☐Keyboard height, screen height and position should be independently adjustable.

☐The operator should be able to adjust screen brightness and contrast.

☐Lighting levels should be between 500–700 lux, depending on visual demands of other tasks performed in the work area.

☐Glare control should be a prime consideration, and can be done with a combination of a number of methods, including:

- Drapes, shades and blinds on the windows,
- Proper positioning of terminals with respect to windows and overhead lighting,
- Screen hoods,
- Antiglare filters on the VDT screen,
- Recessed, covered or baffled direct lighting fixtures and
- Indirect lighting fixtures.

Also, the NIOSH report recommended 15-minute work-rest breaks after two hours of continuous VDT work for operators under moderate visual demands and a moderate work load, and a 15-minute break after one hour of continuous VDT work for operators under high visual demands, high work load or for those engaged in repetitive work tasks.

Finally, the report said that there is a need for mandatory vision testing.

"It is recommended that . . . at the very least VDT workers should have a comprehensive pre-placement vision examination, the report says. "We also recommend that those individuals who become symptomatic even after the initial exam should receive appropriate medical care and that a general exam should be repeated periodically."■

OSI

AARDVARK

OSI

NOW MEANS BUSINESS!

WORD PROCESSING THE EASY WAY— WITH MAXI-PROS

This is a line-oriented word processor designed for the office that doesn't want to send every new girl out for training in how to type a letter.

It has automatic right and left margin justification and lets you vary the width and margins during printing. It has automatic pagination and automatic page numbering. It will print any text single, double or triple spaced and has text centering commands. It will make any number of multiple copies or chain files together to print an entire disk of data at one time.

MAXI-PROS has both global and line edit capability and the polled keyboard versions contain a corrected keyboard routine that make the OSI keyboard decode as a standard typewriter keyboard.

MAXI-PROS also has sophisticated file capabibilities. It can access a file for names and addresses, stop for inputs, and print form letters. It has file merging capabilities so that it can store and combine paragraphs and pages in any order.

Best of all, it is in BASIC (0S65D 51/4" or 8" disk) so that it can be easily adapted to any printer or printing job and so that it can be sold for a measly price.

MAXI-PROS — $39.95

THE EDSON PACK
ALL MACHINE CODE GAMES
FOR THE 8K C1P

INTERCEPTOR —You man a fast interceptor protecting your cities from Hordes of Yukky Invaders. A pair of automatic cannon help out, but the action speeds up with each incoming wave. It's action, action everywhere. Lots of excitement! $14.95

MONSTER MAZE — An Arcade style action game where you run a maze devouring monsters as you go. If one sees you first, you become lunch meat. Easy enough for the kids to learn, and challenging enough to keep daddy happy. $12.95

COLLIDE — *Fast-paced lane*-switching excitement as you pick up points avoiding the jam car. If you succeed, we'll add more cars. The assembler code provides fast graphics and smooth action. $9.95

SPECIAL DEAL—THE ENTIRE EDSON PACK— ALL THREE GAMES FOR $29.95

THE AARDVARK JOURNAL

FOR OSI USERS — This is a bi-monthly tutorial journal running only articles about OSI systems. Every issue contains programs customized for OSI, tutorials on how to use and modify the system, and reviews of OSI related products. In the last two years we have run articles like these!

1) A tutorial on Machine Code for BASIC programmers.

2) Complete listings of two word processors for BASIC IN ROM machines.

3) Moving the Directory off track 12.

4) Listings for 20 game programs for the OSI.

5) How to write high speed BASIC — and lots more —

Vol. 1 (1980) 6 back issues - $9.00
Vol. 2 (1981) 2 back issues and subscription for 4 additional issues - $9.00.

ACCOUNTS RECEIVABLE — This program will handle up to 420 open accounts. It will age accounts, print invoices (including payment reminders) and give account totals. It can add automatic interest charges and warnings on late accounts, and can automatically provide and calculate volume discounts.

24K and 0S65D required, dual disks recommended. Specify system.
Accounts Receivable. $99.95

*** * * SPECIAL DEAL — NO LESS! * * ***

A complete business package for OSI small systems — (C1, C2, C4 or C8). Includes MAXI-PROS, GENERAL LEDGER, INVENTORY, PAYROLL AND ACCOUNTS RECEIVABLE — ALL THE PROGRAMS THE SMALL BUSINESS MAN NEEDS. $299.95

P.S. We're so confident of the quality of these programs that the documentation contains the programmer's home phone number!


SUPERDISK II

This disk contains a new BEXEC* that boots up with a numbered directory and which allows creation, deletion and renaming of files without calling other programs. It also contains a slight modification to BASIC to allow 14 character file names.

The disk contains a disk manager that contains a disk packer, a hex/dec calculator and several other utilities.

It also has a full screen editor (in machine code on C2P/C4)) that makes corrections a snap. We'll also toss in renumbering and program search programs — and sell the whole thing for — SUPERDISK II $29.95 (5 1/4") $34.95 (8").

AND FUN, TOO!

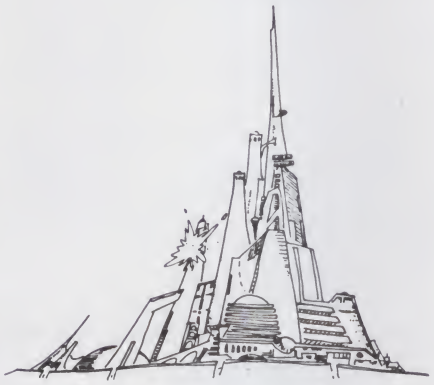

BOOKKEEPING THE EASY WAY — WITH BUSINESS I

Our business package 1 is a set of programs designed for the small businessman who does not have and does not need a full time accountant on his payroll.

This package is built around a **GENERAL LEDGER** program which records all transactions and which provides monthly, quarterly, annual, and year-to-date PROFIT AND LOSS statements. GENERAL LEDGER also provides for cash account balancing, provides a BALANCE SHEET and has modules for DEPRECIATION and LOAN ACCOUNT computation.
GENERAL LEDGER (and MODULES) $129.95.

PAYROLL is designed to interface with the GENERAL LEDGER. It will handle annual records on 30 employees with as many as 6 deductions per employee.
PAYROLL - $49.95.

INVENTORY is also designed to interface with the general ledger. This one will provide instant information on suppliers, initial cost and current value of your inventory. It also keeps track of the order points and date of last shipment.
INVENTORY - $59.95.

GAMES FOR ALL SYSTEMS

GALAXIAN - 4K - One of the fastest and finest arcade games ever written for the OSI, this one features rows of hard-hitting evasive dogfighting aliens thirsty for your blood. For those who loved (and tired of) Alien Invaders. Specify system — A bargain at $9.95

MINOS - 8K - — Features amazing 3D graphics. You see a maze from the top, the screen blanks, and when it clears, you are in the maze at ground level finding your way through on foot. Realistic enough to cause claustrophobia. — $12.95

NEW — NEW — NEW

LABYRINTH - 8K - This has a display background similar to MINOS as the action takes place in a realistic maze seen from ground level. This is, however, a real time monster hunt as you track down and shoot mobile monsters on foot. Checking out and testing this one was the most fun I've had in years! — $13.95.

TIME TREK - 8K - Real Time and Real graphics Trek. See your torpedoes hit and watch your instruments work in real time. No more unrealistic scrolling displays! — $9.95

SUPPORT ROMS FOR BASIC IN ROM MACHINES — C1S/C2S. This ROM adds line edit functions, software selectable scroll windows, bell support, choice of OSI or standard keyboard routines, two callable screen clears, and software support for 32-64 characters per line video. Has one character command to switch model 2 C1P from 24 to 48 character line. When installed in C2 or C4 (C2S) requires installation of additional chip. C1P requires only a jumper change. — $39.95
C1E/C2E similar to above but with extended machine code monitor. — $59.95

Please specify system on all orders

This is only a partial listing of what we have to offer. We now offer over 100 programs, data sheets, ROMS, and boards for OSI systems. Our $1.00 catalog lists it all and contains free program listings and programming hints to boot.

VISA

OSI

AARDVARK TECHNICAL SERVICES, LTD. ↙91
2352 S. Commerce, Walled Lake, MI 48088
(313) 669-3110

OSI

↙See List of Advertisers on page 194



Polaroid's CP-70 Contrast Enhancement Filter uses a circular polarizer which the company says improves the contrast of VDT screen displays while eliminating reflections and glare. The glass version is available for 10-, 12- and 15-inch tubes, with prices ranging from $68–$98.

about. So you can talk about rest breaks, but they want their machines running full-time. Otherwise they lose money."

Blue Shield is a good case study. The company refused to recognize NIOSH's findings even before the final version of its report was issued. Last December, some 1100 Blue Shield employees, all members of the OPEU No. 3, went on strike. Money was one of the issues, but VDT safety was also an important demand.

Blue Shield spokesmen told the press during the strike that the VDT issue was "blown out of proportion." They also said that the company had voluntarily made several ergonomic changes, including window curtains to cut down on glare, terminal hoods, dimmer switches for the overhead lighting and keyboard changes.

But the OPEU wanted the concessions in writing. And when the strike ended 19 weeks later, the company had signed a letter of agreement promising adjustable chairs, specially designed work desks, foot rests, proper lighting conditions and instructional material on proper VDT use.

Significantly, the union did not receive its demand for hourly rest breaks, which many researchers and union officials see as essential.

Blue Shield is an example of a company that had to deal with ergonomic problems after the terminals had already been installed. Retroactively providing such features as detachable keyboards, adjustable terminals and nonglare screens can cost a lot of money. A company will invest, for example, $100 in a terminal, and discover that a nonglare shield will cost another $75.

Naturally, unions would like to see employers install the proper equipment right from the start. "The whole occupational safety and health movement in labor is aimed at prevention," says Fischer. But again, companies might find it too expensive, and opt for what LaGrande calls a "human relations approach."

"The human relations approach is where they let employees voice their complaints, but don't do anything about the problem," he says.

The Newspaper Guild has been more active than most, bargaining for ergonomic concessions in the newsroom. As a result, an increasing number of newspaper employers are addressing VDT-related problems. At least 17 newspapers now pay for employees' first or subsequent eye exams, while at least seven pay for new or improved eyeglass prescriptions. The newspapers in Minneapolis and St. Paul, MN, provide extra rest periods.

VDTs were one of the central issues in recent negotiations with Bay Area newspapers, says David Eisen. Those negotiations were completed before a strike occurred, he says, but adds, "If a strike had come, it [ergonomics] would have been one of the issues."

While the Guild did not win paid ophthalmological exams, they did get adjustable chairs, footrests, adjustable VDT height, suitable lighting, glare shields where requested, detachable keyboards where practical and feasible, and brightness control for a specific VDT model widely used. Employees will also have their new eyeglasses paid for.

Manufacturers present yet another obstacle. Fischer contacted several when he helped put together a conference on VDTs in Michigan last spring.

"You know what kind of answers I got?" he says. " 'Oh, we didn't know there was a problem.' It's a little bit disheartening. I'm disappointed in the manufacturers, that they're not taking human engineering into consideration."

Harold Snyder points out that, again, the bottom line is money.

"That business is awfully competitive, and it's in the same mode as the auto industry: how do we make it cosmetically appealing but cheap to manufacture? They haven't put in any seat belts; they're going for the sex appeal."

But there are some signs of change, at least among the large mainframe manufacturers. Dainoff says that in one survey, about 25 percent of mainframe computer companies mention ergonomic features in their magazine ads.

"The mainframe manufacturers are at least mentioning the words human factor and ergonomics. At least they're using the buzz-words."

At least two companies, says Dainoff, are marketing highly sophisticated nonglare shields: OCLI and Polaroid. Their shields, he says, cut down reflective glare while enhancing the contrast. OCLI sells mainly to terminal manufacturers, and their shields cost $10–$30 in quantity. Polaroid sells their shields in a number of sizes in the retail market, with prices ranging from $68–$98.

A quick scan of new product releases shows varying degrees of awareness on the part of manufactur-

ers. One brochure for an office furniture company, for example, shows a picture of a typist with her elbows almost in her lap. On the other hand, Cortron is promoting a keyboard which it says in the first paragraph includes a new low-profile design which "meets the new European ergonomic requirements."

One particularly eye-catching release, from California Computer Systems, is for the Ampex Dialogue 30 and Dialogue 80 VDTs. Both terminals include nonglare screens and detachable keyboards, and, says a CCS spokesperson, will soon offer amber screens. The spokesperson says that such features are in response to requests from potential customers.


"Everybody asks for a detachable keyboard," she says. "It has become a determining factor for people when buying terminals."

Naturally, the Ampex VDTs don't come cheap: the 30 costs $995, and the 80, $1245.

Stuart Bennett, manager of the Polarizer Division of Polaroid, sums up the manufacturers' responsibilities:

"A year ago, they didn't feel that it was their problem. Today they're beginning to feel that it is. That problem's extent is well-known at this point. You can't find anybody with terminals in his office who doesn't have operators complaining about eye fatigue and visual problems.


"The manufacturers are beginning to realize that they're going to have to do something about it."

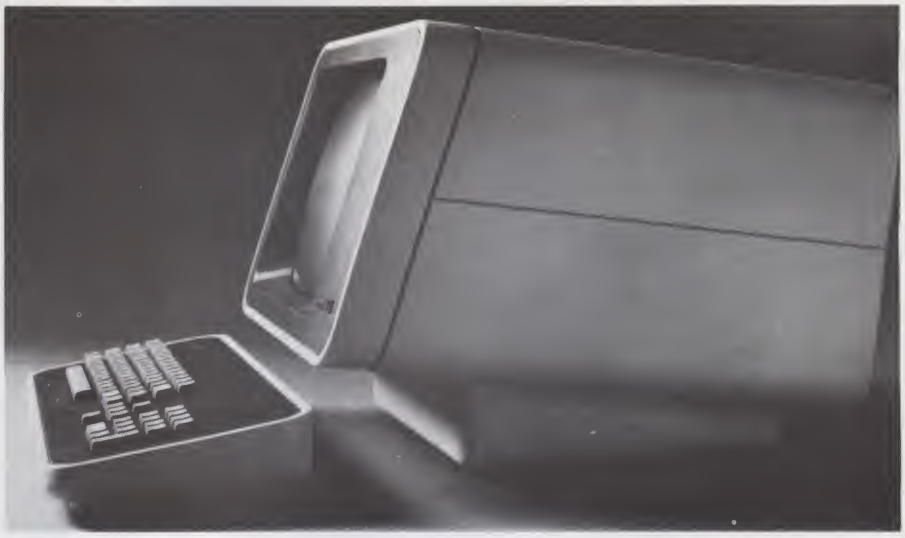

The Ampex Dialogue 30 and 80 video display terminals offer several ergonomic features, including nonglare screens, detachable keyboards and amber screens. Some researchers think that amber is easier on the eyes than green or black.

More Union Activity

Employers are bound to see an increase in union activity over the next few years. Already, many unions are

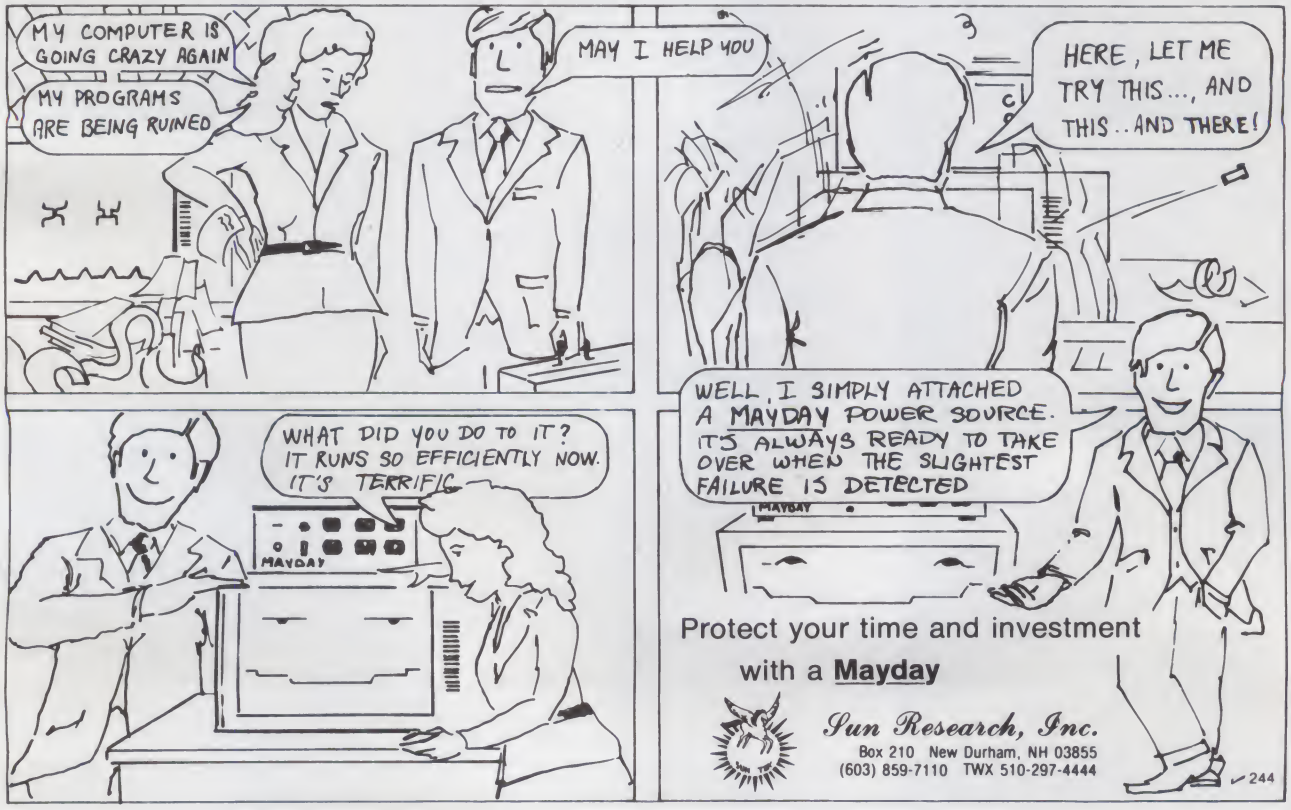

See List of Advertisers on page 194

mobilizing their resources. In Michigan, some 200 delegates from 14 different unions met on April 13 to discuss possible standards to be administered by the state's Bureau of Safety and Regulations. The goal, says Alan Fischer, is to devise "a responsible and reasonable standard that won't overburden the employer but will protect the worker." Canadian unions, too, will be meeting, in Toronto in mid-October.

Some union people say that the VDT issue will also serve to raise the consciousness of workers who heretofore have not been organized.

"VDTs may be a key organizing tool," says LaGrande. "It may be a way to get a foot in the door. That clerical work force hasn't had much political impact in labor one way or another. It may suddenly become more politically conscious of what power it could wield."

Management is not entirely unaware of the potential. For example, a June conference sponsored by the International Word Processing Association included a presentation on "how to deal with unions when and if they begin to organize office workers."

"Equipment used in the home—that stuff is still in the Neanderthal Age."

Meanwhile, the research community continues to do its work. The University of Wisconsin Department of Preventive Medicine, in conjunction with NIOSH, recently completed a large-scale survey of government office employees in that state. The findings, which confirmed the problems mentioned in previous studies, were read at the American Industrial Hygiene Association in May. Lab work continues at NIOSH's motivation and stress research section in Cincinnati, OH, and at Virginia Polytechnic.

The Visual Science Foundation in Palo Alto, CA, is cosponsoring with Stanford Research Institute a conference on VDTs this September. The National Research Council of the National Academy of Sciences is conducting a workshop in August.

A major study by the Newspaper Guild and the Mount Sinai School of Health will survey some 3000 employees in a half-dozen locals for health problems. The study will cover all departments, including editorial, advertising and circulation.

Finally, concerned parties are exploring the possibilities of legislation. Maine became the first state in the country in which legislators considered a bill to make certain VDT health and safety measures points of law. The bill, which was defeated in May, concerned employees who worked on VDTs at least four hours a day. It would have required employers to provide annual eye exams, semiannual maintenance of equipment, a rest period or a change of tasks every two hours and literature on proper VDT use.

The bill was sponsored by Edith Beaulieu, a representative from Portland. She works as a cleaning woman at a Portland newspaper, and is a shop steward for the Newspaper Guild. She had followed the VDT controversy through union material for several years, and decided to introduce the bill when she became the chairperson of the Legislature's Labor Committee.

Beaulieu says that opposition to the bill came primarily from industry, particularly banking and insurance.

"What fascinates me," she says, "is that none of them had heard of this when the bill came out. Six weeks later, they were all experts."

Beaulieu says there is "absolute evidence" that VDTs affect vision.

"I contend that the industry is going to be a lot happier with this kind of bill than they will be when someone with sore eyes pushes the wrong key on a computer somewhere."

What about Microcomputers?

At first glance, microcomputerists don't appear to be in the same boat as office VDT users.

"The users you're talking about are generally highly motivated, high-level, well-trained individuals," says Sauter. "The work they're doing is more creative. So I think that the problems we're seeing right now in the office will not exist in the home.

"In the office, you're talking about a fast pace, routine work, no control at all of the work place, no dedication to or personal interest in or under-

COMMODORE:

VIC-20 color computer	$ 269
4016 PET, 16K	799
8032 CBM, 32K	1,469
*4031 single drive, 170K	529
4040 dual drive, 343K	1,059
8050 dual drive, 974K	1,469
4022 tractor printer	649
4023 roll printer	569

*available july

ATARI:

400 computer, 8K	$ 419
800 computer, 16K	749
810 single drive, 88K	469
815 dual drive, 320K	1,129
820 40 column printer	339
825 80 column printer	749
830 modem	149
850 interface module	159

PRINTERS & ACCESSORIES:

ANADEX DP9000/1	$ 1,199
DP9500/1	1,299
BASE2 800B	649
CENTRONICS 737-1	799
C. ITOH STARWRITER, 25p	1,539
STARWRITER, 45p	1,879
NEC SPINWRITER, 5530p	2,399
OKIDATA MICROLINE 82	729
MICROLINE 83	979
MIPLOT, graphics plotter	1,139
AXLON 32K, ATARI ramcram	189
MICROTEK 16K, for ATARI	99

EXIDY CLOSE-OUT:

SORCERER, 16K (limited quantities)	939

MicroComputer Warehouse ✓260
3620 La Habra Way
Sacramento, Ca. 95825
(916) 486-3678

Call or write for price list with comparable savings on a full line of microcomputer peripherals and accessories. Ask about our monthly system special!
Master Charge/Visa welcome. We pay freight on prepaid orders. Allow 2 weeks for personal checks. Prices subject to change without notice.

AMERICAN SOFTWARE & SYSTEMS, INC.

SOFTWARE FOR TRS80*
MODEL I LEVEL II / MODEL III and
APPLE II PLUS** (Disk Format)

1. **WORDTYPE** — word processing offering latest text editing, page length/numbering and additional features available in more expensive software. **$89.95**
2. **BUSINESS APPLICATIONS** — Accts Rec/Pay, Inventory, Invoice Mailing List and others. **$69.95**
3. **HOME APPLICATIONS & GAMES** — Checkbook, inventory, payable, recipe and others. ... **$29.95**
4. **SCIENTIFIC & GAMES** — Conversions, Mathematics, hydraulic calculations, bar graph presentation of data games and others. **$39.95**
5. **AMATEUR RADIO & ELECTRONICS** — Antenna design (quad/beam/dipole), db loss, ccode and others. **$34.95**
6. **GAMES** — Wheel of Fortune, Slots, Keno and more. **$9.95**

TERMS: M.O., Visa, or Master Charge.
Add $1.50 for shipping and handling.

FOR CATALOG SEND $1.50
FOR SHIPPING AND HANDLING

AMERICAN SOFTWARE & SYSTEMS, INC. ✓249
2110 North Carson Street
Carson City, Nevada 89701
(702) 883-3274

*A trademark of Tandy Corp. **A trademark of Apple Computor Inc.

standing of what they're doing. At home, it's a different approach. A user can live with the inconveniences for short periods of time."

Dainoff points to European and New Zealand studies which indicate that programmers are the least likely of all VDT workers to complain.

"It's the structure of the job; it's challenging work," he says. "Also, the programmer is not locked into his terminal. He has other stresses, but they're primarily intellectual."

On the other hand, microcomputers are being used in increasing numbers in offices and schools. And in these environments, users are likely to find themselves subject to the same problems as other VDT users. In fact, because microcomputer manufacturers have been subject to less pressure from customers, who generally are not associated with organized labor groups, many micros will probably create more problems.

"Manufacturers are feeling the pressure right now," says Sauter. "With respect to human engineering, they're adapting. But equipment used at home—that stuff is still in the Neanderthal Age."

Dainoff says that there is "absolutely no data" on microcomputers and ergonomics.

"However, my own lab is using Apples, because it's cheaper to buy three of those than to buy a conventional minisystem. And I'm using one as a word processor, so I've got some personal experience with home computers. My feeling is that ergonomically, they're lousy."

Harold Snyder says that some of the worst displays he's seen are on terminals used with home computers.

"I've seen one terminal on a lesser-known [than Apple] microcomputer which you'd have to be eight feet away from to see properly," he says.

Problems exist in almost every area. Many microcomputers, for example, do not include detachable or moveable keyboards. The keys often are poorly spaced, do not offer a response when pressed and are not in a standard typewriter configuration. Few terminals are angle-adjustable, or have proper nonglare features. The display images are often poor, especially when a televison set is used as a monitor.

Microcomputer manufacturers show varying degrees of consciousness when discussing ergonomics. A spokesperson for Texas Instruments, for example, admits that the TI 99/4 is "sort of lousy" for business applications, but says that the keyboard was designed "to accommodate youngsters." He says that the 28-column screen is designed to take advantage of the computer's graphics capabilities, which makes it difficult to use with a program like VisiCalc, which is best used with an 80-column format.

"People will overlook some of the problems. But sooner or later, home users will want better design."

A person at Radio Shack admits that some people have opted for the TRS-80 Model II over the Model III because the former has a moveable keyboard. But he was skeptical of most ergonomic concerns.

"It used to be a big problem that there was no software," he says. "Now we've got software for the machines, so people start nit-picking. Once the major points are taken care of, they start looking for the minor points."

B. J. Freeman, an engineering liaison at Exidy Systems, says that ergonomics is a frequent topic of conversation among engineers. He indicates that the problem lies not only with the manufacturers, but with the expectations of the consumer.

"I've built display units for games and I've found that there is a high attraction for sound and color," he says. "If it has bells and lights and whistles, people think it's tremendous. If you show the same display on a black and white terminal, people think it's terrible."

So what's a microcomputerist to do?

If you're already using one, either at home or in the office, the same guidelines apply as with any other VDT. (See sidebar, "Tips for VDT Users.") If you're thinking of buying one, keep an eye out for a few simple features:

- The keyboard should be detachable or moveable. This will let you adapt the keyboard and terminal to your needs, rather than the other way around.
- Be sure that the keyboard is comfortable. Is the pressure to your liking? The spacing between keys? Do the keys let you know when you've hit them?
- Try to get a terminal with a good nonglare shield. The two best ones are made by OCLI and Polaroid, but, while OCLI indicated that it was negotiating with Apple and Radio Shack, most microcomputer terminals use less-efficient methods.
- Be sure that you can adjust the brightness and contrast.
- Check the image on the screen. It should be sharp and legible, with no flicker.


Eventually, microcomputer manufacturers will begin to incorporate ergonomic features into their equipment. The question, as Dainoff points out, concerns when the consumer will start demanding such features.

"People are so excited about microcomputers, and so impressed by their capabilities, that they'll overlook some of the problems," he says. "But I would guess that sooner or later, home users will want better design."■

References

- Brodeur, Paul S. *The Zapping of America*. New York: W. W. Norton and Co., Inc., 1977.
- Brynes, Steve. "Tests of Microwave Radiation Produce No Adverse Effects on Primates," *Research Resources Reporter* (May 1981), pp. 1–4.
- *Microwave News*. Louis Slesin, ed. Their address is PO Box 1799, Grand Central Station, New York, NY 10163 (212-794-9633). The March 1981 issue includes a round-up of activities related to VDT radiation. Subscription: $165 a year.
- National Institute for Occupational Safety and Health. "Potential Health Hazards of Video Display Terminals." Referred to as the San Francisco report. Available from the NIOSH Clearinghouse, 4676 Columbia Parkway, Cincinnati, OH 45226.
- Rados, Bill. "VDT's Pass Medical Tests," *FDA Consumer* (April 1981), pp. 11–13.
- Solon, Leonard R. "A Public Health Approach to Microwave and Radiofrequency Radiation," *The Bulletin of the Atomic Scientists* (October 1979), pp. 51–55.
- Sorensen, Jeff, and Swan, Jon. "VDTs: The Overlooked Story Right in the Newsroom," *Columbia Journalism Review* (January/February 1981), pp. 32–38.

NOW THAT YOU'RE SEEING DOUBLE YOU NEED MORE ROOM...

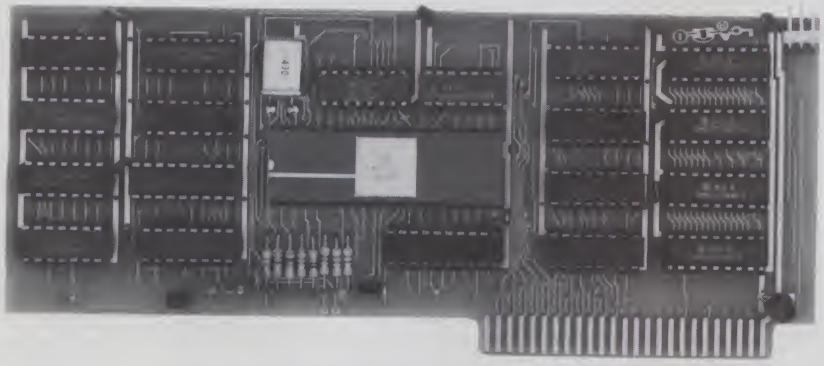

DOUBLEVISION™
80 x 24 Video Display from Computer Stop


DoubleVision is the time-tested upper-and-lower-case Video Display. And now it has a host of new features. Like the availability of a completely commented source listing of software and hardware schematics. Or the inclusion of a Sysgen program to select type of cursor, monitor band width and display of control characters.

Moreover, DoubleVision is compatible with CCA Data Management (and full screen mapping), Easywriter Professional System, Apple Pie 2.0, PASCAL, Z-80 Softcard, MAGIC-WAND and WORDSTAR.

It's the only 80-column card that has software on disk making it easy to provide updates. In fact, updates are automatically mailed to our customers and *billed* for cost of disk and shipping only. In short, DoubleVision is adaptable to meet your needs.

The price? It's just $295.

...AND HERE'S MORE ROOM!

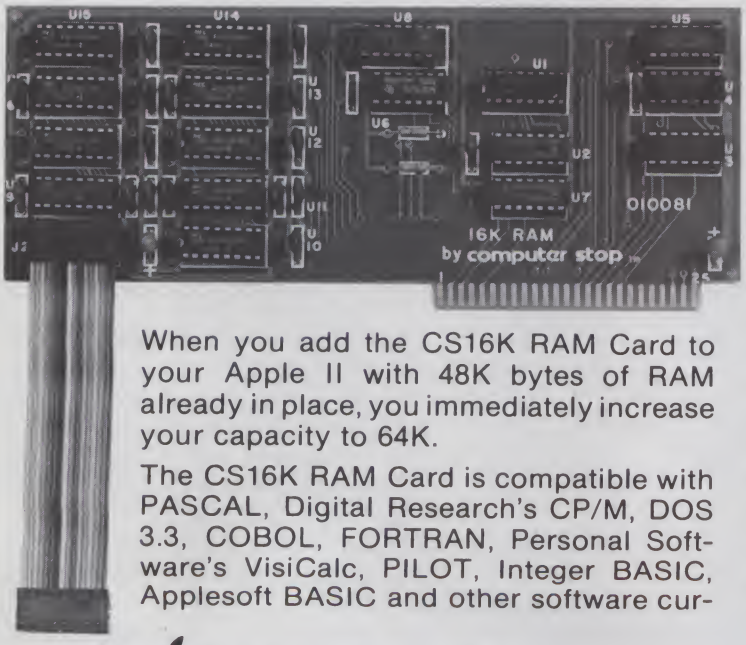

The CS16K RAM Card
(compatible with PASCAL, CP/M®, DOS 3.3 and other Apple software)

When you add the CS16K RAM Card to your Apple II with 48K bytes of RAM already in place, you immediately increase your capacity to 64K.

The CS16K RAM Card is compatible with PASCAL, Digital Research's CP/M, DOS 3.3, COBOL, FORTRAN, Personal Software's VisiCalc, PILOT, Integer BASIC, Applesoft BASIC and other software currently used with APPLE II.

What's more, the CS16K RAM Card is backed by the Computer Stop reputation for excellent service. In fact, **we've doubled the warranty to 180 days,** instead of the usual 90.

And we've saved the best 'til last. The Price. It's only $195.

computer stop Your best stop for Apple products.

16919 Hawthorne Blvd.
Lawndale, CA 90260
(213) 371-8500

Available at select Apple dealers.

283

Apple is a trademark of Apple Computer, Inc.
CP/M is a trademark of Digital Research

2545 W. 237th Street
Torrance, CA 90505
(213) 539-7670

Dealers: Ask about special-priced demo unit.

With fixed 5 V and variable ±22 V output (at 1.5 amps), this supply can serve as an S-100 board test fixture or can power a small computer system.

Construct a Modular, Multi-Purpose Power Supply


By J. C. Hassall

It was only a few years ago that the prospect of having to design a new power supply brought involuntary shudders from all but the most stout-hearted. Armed with a pad of paper, a large wastepaper basket, a slide rule (well, maybe it has been longer than I realize) and a dog-eared copy of ARRL's *Radio Amateur's Handbook*, you set out to design a choke input Pi filter (or was it a capacitor input?) supply.

Well, thanks to the folks that brought us the digital revolution, power supply design is now almost trivial. Fortunately, there are more "standard" voltage requirements for digital work than for ham radio work. If you are working solely with TTL packages, all you need is 5 V, so a 6 V lantern battery and a medium-duty diode (for a .7 V drop) will suffice. If you work with dual supply operational amplifiers, you need plus and minus voltages, say ±12 V. Or you might want a larger spread in voltages, say to ±20 V. If you work with RS-232C signal levels, you will need ±12 V, in addition to +5 V. The list could go on.

The present power supply design has evolved through a number of iterations to the present configuration. The intent was to provide a 5 V, 1.5 amp supply, all necessary S-100 voltages and two variable supplies to ±22 V at 1.5 amps. The power supply would thus fulfill a number of functions: the 5 V, 1.5 A supply would be ample for most TTL breadboarding; the S-100 voltages would allow testing of S-100 boards out of the system; and the variable voltage supplies would provide voltages for op-amp experimentation, RS-232 voltage levels for interface experimentation, voltages for A/D and D/A converter

Address correspondence to J. C. Hassall, H&H Enterprises, 1201 Highland Circle, Blacksburg, VA 24060.

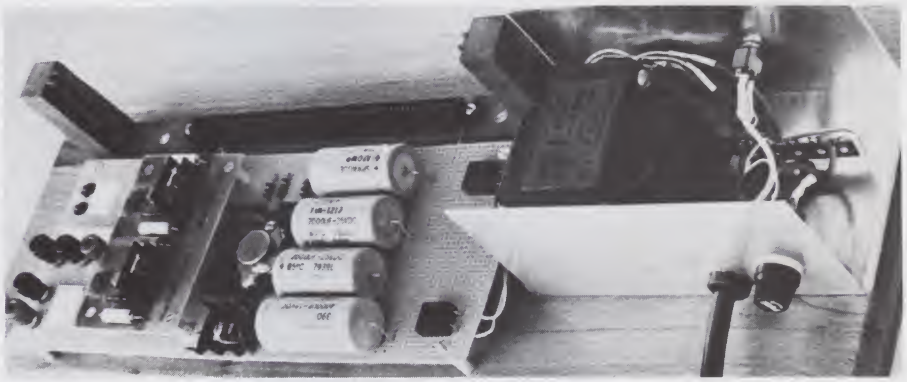

An interior view of the enclosure, showing safety precautions used. The MOV (see text) is just visible under the switch leads.

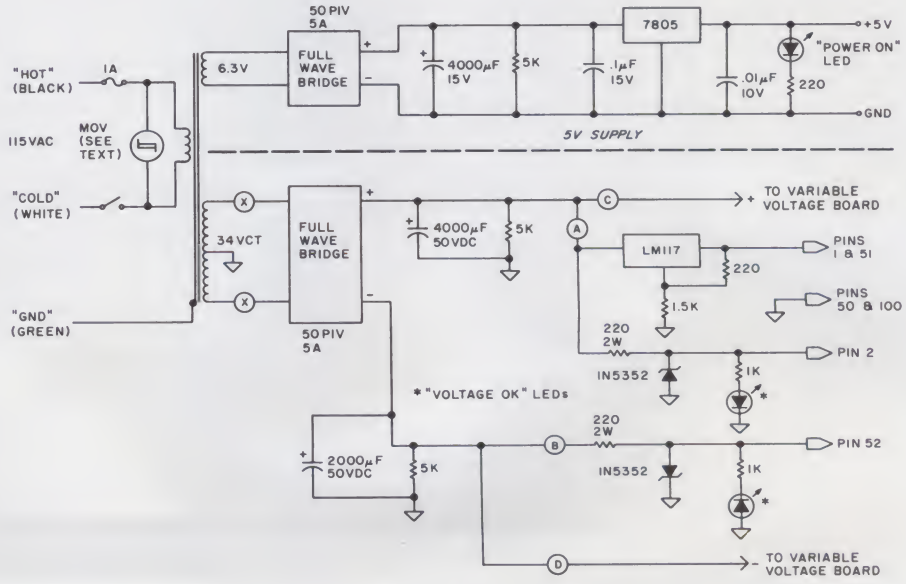


Fig. 1. Circuit diagram of the main system. See text for explanation of symbols. Unless otherwise noted, all resistors are ¼ W.

DISCOUNT SOFTWARE

✓250

CP/M users specify disk systems and formats. Most formats available.
✓ (New items or new prices)

DISK WITH MANUAL / MANUAL ONLY

Ad#15

CP/M®

ARTIFICIAL INTELLIGENCE
Medical(PAS-3) $849/$40
Dental (PAS-3) $849/$40

ASYST DESIGN
Prof Time Bill $549/$40
✓ General Subroutine $269/$30
✓ Application Utilities $439/$30

COMPLETE BUS. SYSTEMS
Creator $269/$25
Reporter $169/$20
Both $399/$45

COMPUTER CONTROL
Fabs (B-tree) $159/$20
UltraSort II $159/$25

COMPUTER PATHWAYS
Pearl (level 1) $ 99/$25
Pearl (level 2) $299/$40
Pearl (level 3) $549/$65

DIGITAL RESEARCH
CP/M 2.2
NorthStar $149/$25
TRS-80 Model II (PT) $159/$35
Micropolis $169/$25
Cromemco $189/$25
PL/I-80 $459/$35
BT-80 $179/$25
Mac $ 85/$15
Sid $ 65/$15
Z-Sid $ 95/$15
Tex $ 70/$15
DeSpool $ 50/$10

D.M.A.
✓ Ascom $149/$15
DMA-DOS $179/$35
CBS $369/$45
✓ Formula $539/$45

GRAHAM-DORIAN
General Ledger $729/$40
Acct Receivable $729/$40
Acct Payable $729/$40
Job Costing $729/$40
✓ Payroll II $729/$40
✓ Inventory II $729/$40
Payroll $493/$40
Inventory $493/$40
Cash Register $493/$40
Apartment Mgt $493/$40
✓ Surveying $729/$40
✓ Medical $729/$40
✓ Dental $729/$40

MICRO-AP
S-Basic $269/$25
Selector IV $469/$35

MICRO DATA BASE SYSTEMS
HDBS $269/$35
MDBS $795/$40
DRS or QRS or RTL $269/$35
MDBS PKG $1295/$60

MICROPRO
✓ WordStar $319/$60
Customization Notes $ 89/$na
✓ Mail-Merge $109/$25
✓ WordStar/Mail-Merge $419/$85
DataStar $249/$60
WordMaster $119/$40
SuperSort I $199/$40

MICROSOFT
✓ Basic-80 $289/$30
Basic Compiler $329/$30
Fortran-80 $349/$30
Cobol-80 $574/$30
M-Sort $124/$30
Macro-80 $144/$20
Edit-80 $ 84/$20
MuSimp/MuMath $224/$25
MuLisp-80 $174/$20

ORGANIC SOFTWARE
TextWriter III $111/$20
DateBook II $269/$25
Milestone $269/$25

OSBORNE
General Ledger $ 59/$20
Acct Rec/Acct Pay $ 59/$20
Payroll w/Cost $ 59/$20
All 3 $129/$60
All 3 CBASIC-2 $199/$75

PEACHTREE®
General Ledger $399/$40
Acct Receivable $399/$40
Acct Payable $399/$40
Payroll $399/$40
Inventory $399/$40
✓ Surveyor $399/$40
Property Mgt $799/$40
CPA Client Write-up $799/$40
Mailing Address $349/$40

SOFTWARE WORKS
Adapt (CDOS to CP/M) $ 69/$na
Ratfor $ 86/$na

SOHO GROUP
MatchMaker $ 97/$20
WorkSheet $177/$20

STRUCTURED SYSTEMS
GL or AR or AP or Pay $599/$40
Inventory Control $599/$40
✓ Magic Worksheet $219/$40
Analyst $199/$25
✓ Letteright $179/$25
QSort $ 89/$20

SUPERSOFT
✓ Diagnostic I $ 49/$20
Diagnostic II $ 84/$20
✓ Disk Doctor $ 84/$20
Forth (8080 or Z80) $149/$25
✓ Fortran $219/$30
✓ Fortran w/Ratfor $289/$35
Other less 10%

TCS
GL or AR or AP or Pay $ 79/$25
All 4 $269/$99

UNICORN
✓ Mince $ 99/$25
✓ Scribble $ 99/$25
✓ Both $189/$50
✓ Amethyst $299/$75

WHITESMITHS
"C" Compiler $600/$30
Pascal (incl "C") $850/$45

"DATA BASE"
FMS-80 $649/$45
dBASE II $629/$50
Condor $599/$30
✓ Condor II $899/$50
✓ Access/80 $749/$50

"PASCAL"
Pascal/MT+ $429/$30
Pascal/Z $349/$30
Pascal/UCSD $299/$30
Pascal/M $149/$20

"WORD PROCESSING"
WordSearch $179/$25
SpellGuard $229/$25
✓ VTS/80 $259/$65
Magic Wand $289/$45
Spell Binder $349/$45

"OTHER GOODIES"
✓ The Last One $549/$95
✓ SuperCalc $269/$50
✓ Target $189/$30
BSTAM $149/$15
Tiny "C" $ 89/$50
Tiny "C" Compiler $229/$50
CBASIC-2 $ 98/$20
Nevada Cobol $129/$25
MicroStat $224/$20
✓ Vedit $105/$15
ESQ-1 $1349/$50
MiniModel $449/$50
StatPak $449/$40
Micro B+ $229/$20
✓ Raid $224/$35
String/80 $ 84/$20
String/80 (source) $279/$na

APPLE II®

INFO UNLIMITED
✓ EasyWriter $224
✓ Datadex $349
Other less 15%

MICROSOFT
✓ Softcard (Z-80 CP/M) $259
Fortran $179
✓ Cobol $499

MICROPRO
✓ Wordstar $269
✓ MailMerge $ 99
✓ Wordstar/MailMerge $349
✓ SuperSort I $159

PERSONAL SOFTWARE
Visicalc $ 99
✓ Visicalc II $159
CCA Data Mgr $ 84
Desktop/Plan II $159
Visiterm $129
Visidex $159
Visiplot $149
Visitrend/Visiplot $229
Zork $ 34

PEACHTREE®
General Ledger $224/$40
Acct Receivable $224/$40
Acct Payable $224/$40
Payroll $224/$40
Inventory $224/$40

"OTHER GOODIES"
✓ dBASE II $289/$50
✓ VU #3 (use w/Visicalc) $ 49
Super-Text II $127
Data Factory $129
✓ DB Master $184
✓ OEM (complete accting) $399
Ledger Plus $549
Charles Mann less 15%
STC less 15%

ORDERS ONLY—CALL TOLL FREE VISA • MASTERCHARGE
1-800-854-2003 ext. **823** • **Calif. 1-800-522-1500** ext. **823**

Overseas—add $10 plus additional postage • Add $2.50 postage and handling per each item • California residents add 6% sales tax • Allow 2 weeks on checks, C.O.D. ok • Prices subject to change without notice
All items subject to availability • ®—Mfgs. Trademark

THE DISCOUNT SOFTWARE GROUP
6520 Selma Ave. Suite 309 • Los Angeles, Ca. 90028 • (213) 666-7677
Int'l TELEX 499-0032 BVHL Attn: DiscSoft • USA TELEX 194-634 BVHL Attn: DiscSoft •
TWX 910-321-3597 BVHL Attn: DiscSoft

work and as many other uses as your imagination could provide. The power supply described here is powerful enough to power a small computer system, a single-board computer or all but the most power-hungry experiments.

The Finished Product

The entire supply fits easily on a 20×8 inch board. The power supply could have been packaged into a smaller area, but when area is available, I prefer to separate components to facilitate heat dissipation—you will notice that all regulators have heat sinks. Also, the empty space on the base allows the addition of breadboard circuitry on the power supply board. The S-100 edge connector allows you to directly check the board—no clip leads are needed.

Safety

One subject of concern to any power supply designer is safety. You will notice in the photo that all connections to the ac line are enclosed in the metal box. Hence, no idle fingers can contact line voltage. For the line connection, use a three-conductor cord.

As shown in Fig. 1, the fuse is installed on the "hot" side of the line, and the switch is connected in the "cold" side. By connecting the switch as shown in Fig. 1, with the cold side of the ac line going to one pole of the switch, rather than the center pole (or "toggle"), the remaining pole (if you use an SPDT switch) does not need insulation sleeving, as shown in the photo. Also notice in the photo the judicious use of shrink sleeving with all leads in the enclosure—another safety precaution.

By electrical code, the hot side is always color-coded black, the cold side is always color-coded white, and the ground lead is always color-coded




Fig. 2. A method of wiring multiple transformers to achieve the desired voltage if a standard transformer is not available. Points X-X correspond to X-X in Fig. 1.




Fig. 3. Forming a full-wave bridge from discrete diodes. Each diode should be rated no less than 50 PIV, 5 A.

green. Use a terminal strip for all line connections—never use splices that are allowed to lie loose in the box.

A strain relief should be used on the line cord—either a commercial wire bushing or a knot tied in the cord—to prevent an accidental tug on the cord from pulling all the connections loose. Also, don't eliminate the line cord fuse, even though the secondaries cannot draw enough power to blow the fuse—safety again, if a short should develop in the transformer primary circuit. Use common sense and good electrical construction practices, and your power supply will be perfectly safe.

The Design

Referring to Fig. 1, you can see that the supply has been designed in a modular fashion. Sections can be eliminated or added later as desired. There are basically three modules: the +5 V supply, the S-100 taps and the variable voltage board.

The transformer I used had a multiple tap secondary, as shown in Fig. 1. However, if your junk box is not well-stocked, Fig. 2 shows how to arrange three transformers to create similar voltages. Radio Shack transformer 273-050 could be used for the 6.3 V supply, and two number 273-1512 transformers could be used for the higher voltages. Be sure to check out the transformer in the store, or ensure that you can return defective units—Radio Shack seems to have a quality-control problem with their transformers.

Regardless of what arrangement you use for the transformers, follow the safety precautions given above. Another practice I use is the MOV (metal oxide varistor) shown across the primary in Fig. 1. If your ac line has a lot of spikes (caused by motors cycling on/off, for example), the MOV helps to limit the voltage spikes.

In your application, the MOV might not be critical if you want to omit it. Bear in mind, however, that voltage spikes are potentially damaging. Spikes to 2000 V are not unusual on a standard 115 V ac line. Those spikes are almost 20 times the line voltage and will be passed to the secondaries in proportion to the step-down ratio of the transformers. If you plan to power a board containing LSI chips, use an MOV. I used a GE V220MA4B. I will supply this part if you have trouble finding it in your area. Include a stamped, self-addressed envelope and a check for $2.25 (VA residents, include $.09 tax). Refer to the part number and KB8519.

The +5 V supply is powered from the 6.3 V transformer secondary. The rectifier shown is a full-wave bridge in a single package. If you prefer to use discrete diodes, use the equivalent circuit shown in Fig. 3. The filter capacitor should be at least 4000 uF for adequate filtering. The 5k bleeder resistor takes about 15 seconds to bleed the charge from the capacitor after power-off. The 1 uF and 0.1 uF bypass capacitors are not essential, since the regulator is close to the filter capacitor, but are good to have anyway.

Use a heat sink on the 7805, and you can get up to 1.5 amps regulated output with a TO-220 package. In the event of a short circuit across the regulator output, it will automatically shut down, so fuses are not required. The power-on LED is powered from the 5 V supply. If the +5 V supply is not needed, eliminate all components above the dashed line in Fig. 1.

The full-wave bridge for the balance of the supply is used as a half-wave bridge, with return going to the secondary centertap ground. Thus, the one centertapped secondary supplies plus and minus voltages at roughly three-fourths the secondary voltage. The S-100 bus requires +8 to 10 V for pins 1 and 51, +15 V for pin 2, −15 V for pin 52 and ground for pins 50 and 100.

An LM117 adjustable regulator is used to provide +9.8 V to pins 1 and 51. I chose the LM117 because it is easily adjusted and is good for 2 amps or so with a heat sink. The voltage output from the LM117 may seem strange, but results from using standard values for the two resistors. The formula for determining voltage output is $V_O = 1.25(1 + R/220)$, where R is the 1.5k resistor in Fig. 1, should you want to change the output voltage. Fig. 4 gives the pin-out for all regulators used in this design.

Since the +15 V and −15 V bus lines are low current, I chose to use a current limiting resistor and zener diode for regulation of each voltage. The current output is limited to about 70 mA, but has been sufficient for all my S-100 board testing thus far. Be careful that if you reduce the resistance of the dropping resistors (220 ohms for each voltage) to increase the output current, you don't exceed the current rating of the zeners. Zeners can be paralleled for increased current capacity, if necessary.

The dropping resistors are large enough to handle normal current demands, but if the outputs are shorted, the resistors will get hot after a minute or so. An electronic current limiter could have been incorporated, but I felt that it would have been overkill. Instead, I used two LEDs to indicate "voltage output OK." If a connection on the board under test is shorted, the appropriate LED will go out.

As a safety precaution, don't remove the board under test until the LEDs have gone out, indicating that the filter capacitors have been discharged. Also, never install a board into the card edge connector if the

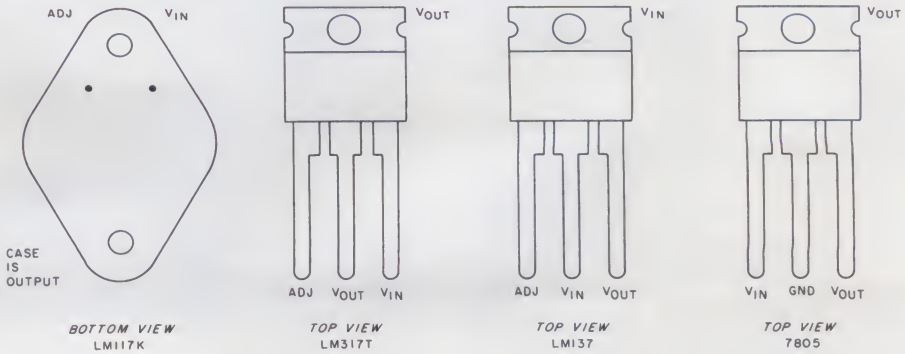


Fig. 4. Pin-out of all regulators used in this design. Be sure to use adequate heat sinks when soldering to the regulator terminals, and use a solder lug for the LM117k case connection.

power is on—same as installing boards into the system bus. The S-100 voltage taps are wired to the card edge connector and are not available for general-purpose use. If the S-100 module is not needed, simply eliminate sections A and B in Fig. 1.

The variable voltage board (shown in Fig. 5) provides adjustable voltages to ±22 V at currents up to 1.5 A. The two adjustable regulators LM317T and LM337T provide adjustability while maintaining constant voltage regulation.

The regulators can be adjusted over a 40 V range; i.e., the V_{out} to V_{in} differential can be as large as 40 V. Thus, regulated outputs to ±40 V are possible by increasing the transformer secondary ratings.

In my setup, the variable voltage board was the only portion of the design built on a printed circuit board, but it could have been hand-wired like the balance of the unit. If the variable voltage module is not needed, simply break the circuit at points C and D in Fig. 1.

Component Substitution

Whenever possible, it is always nice to be able to use components from stock, rather than buy them. That raises the question of component substitutability. With the present design, as with most power supply designs, voltage and current requirements pretty well establish component values. For example, the specified regulator ICs can provide up to 1.5 to 2 amps, as noted above. Thus, they and all associated current-carrying components must be sized for the rated current and heat-sinked as appropriate.

The transformer secondaries and the rectifiers must be capable, assuming worst-case conditions of all supplies drawing full current simultaneously, of the total current draw for each supply. Whether that worst-case assumption pertains to each user is an individual judgment, but it is better to err on the side of oversized components during construction, rather than have to replace underrated components, or build a heavier-duty supply later. Of course, it is inadvisable to use a 10 amp secondary when 3 or 4 amps will suffice.

The voltage rating of the capacitors and rectifiers is much more clear-cut. To determine the necessary PIV rating, multiply the rated secondary voltage by 1.4 to determine the peak rectified voltage. Then add 20 percent for a safety margin for voltage spikes. For example, if the secondary voltage is stated as 6.3 V dc, the peak rectified voltage will be about 9 V. Thus, the minimum voltage rating of the rectifiers and filter capacitors should be 11 V dc.

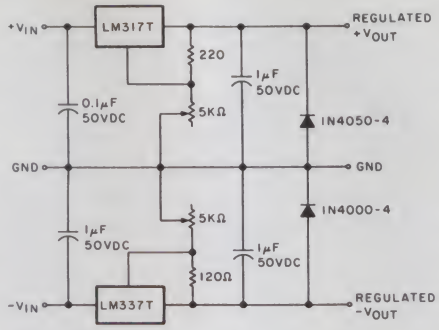


Fig. 5. Circuit diagram of the variable voltage board. All resistors are ¼ W.

The capacitance value of the filter capacitors could be established mathematically, but suffice it to say that the values given in Fig. 1 are minimum values. An increase of two to three times the values given would be acceptable, although of little benefit to the system. Large values of filter capacitance are generally beneficial only at high current loads.

Construction Techniques

One objective of this design is to allow flexibility in choosing components. Another is to make the design modular so that unnecessary sections can be omitted without affecting overall operation of the unit. While originally conceived as a test fixture and breadboarding aid, I wanted the design as it evolved to be convenient for hobbyist use (board testing or small system power supply). A number of changes have taken place, as evident from the extra holes in the perfboard.

I used an LMB 141 chassis box, although there are better-looking boxes available. When wiring the ac portion, follow the guidelines above under the safety section. Use 24 AWG leads minimum to wire in the 7805 and LM117 regulators and from the regulators to the voltage output points. Use 26 AWG minimum elsewhere. Use a grommet to bring all leads from the box.

Diode bridges are more convenient to use and take up less board space than the equivalent discrete diodes, but the choice of rectifiers is a minor one. Be sure to provide a good heat sink for each of the regulator ICs—the safe output current is appreciably reduced if heat sinks are not used. Be careful not to mount all regulators on the same heat sink, or even allow the heat sinks to touch.

As can be seen in Fig. 4, the potential of the case or mounting tab varies according to the regulator. If the heat sinks touch, you'll destroy the regulators. Put a film of silicone grease between the regulator and the heat sink; then screw the two tightly to the board.

I used a printed circuit board for the variable voltage board, which was a patch from a previous power supply design; it could just as easily be wired to the perfboard.

Banana jacks are used for output terminals. Any suitable screw-type terminal boards are inconvenient but are less expensive. If you use banana jacks, be sure to color-code them so you can tell at a glance which polarity is which. Label all terminals, regardless of what type you use.

Installation of the S-100 card edge connector is straightforward. Simply wire up the appropriate pins as shown in Fig. 1. Be sure to use insulation tubing over the connector pins to prevent shorting the power leads to adjacent connector pins. Also, be sure to include a polarization device with the connector so that a board cannot be accidentally installed backwards.

Power-up and Enjoy

So there you have it—a modular power supply design with numerous applications. As illustrated, the power supply makes an excellent power test fixture for S-100 boards, in addition to supplying separate outputs of +5 V at 1.5 amps and variable voltages to ±22 V at 1.5 amps.

In addition to testing S-100 boards (or any others), the supply has enough power to drive a small system or a single-board computer. Working with dual-supply operational amplifiers is easy with the variable voltage section, and the +5 V supply has enough capacity to power extensive breadboard circuitry.

Being modular in design, sections not needed can be eliminated or added later. If you are working from a very limited budget, sections can be added as the finances allow. The fully stuffed version can be built for $40 or less, depending upon how well your junk box is stocked. You should never need another general-purpose power supply after building this one. Power up and enjoy. ■



INTERNATIONAL APPLE CORE™ presents

Apple Orchard

Including CONTACT

✓387

Apple Orchard magazine is an official publication of International Apple Core, and will keep you informed of new developments in all areas of Apple computing. The CONTACT section will help you better understand and make use of your Apple, and will inform you of new products and peripherals. The IAC section will provide you with names and addresses of each member Apple user group, and will mention upcoming computer shows and fairs. PLUS . . . each issue contains great feature articles, such as "Applesoft Internals," "Hi-Res Graphics: Resolving the Resolution Myth," and "A BASIC to Machine Language Interface." Subscribe today . . . you can't afford to miss a single issue!

Please enter a subscription to Apple Orchard for:

NAME _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

Subscription rate: $10.00 for four issues.
First class postage: $5.00 additional (required for Canada, Mexico, APO, and FPO addresses)
Overseas and other foreign air mail postage (required): $10.00 additional.

☐ Check or money order enclosed

Make check or money order payable to "International Apple Core" and return with this form to:

☐ VISA ☐ MasterCard

No. _____ Exp. _____

Apple Orchard Subscriptions
P.O. Box 1493
Beaverton, OR 97075

Here's a look at some inside information on how Heath's disk operating system handles disk files.

Dissecting the HDOS Diskette

By E. Tom Jorgenson

Like so many computer manufacturers before it, Heath has withheld a great deal of information from its users concerning how HDOS handles disk file space.

Such lack of information is a major obstacle to recovering from diskette crashes, when it is often necessary to reconstruct files on a diskette by hand. Rebuilding files sector by sector requires intimate knowledge of the diskette structure, and until now few outside of Benton Harbor have had this knowledge.

In this article, I will try to reveal much of this formerly unavailable wisdom. Armed thus, you should in the future be able to salvage most of the data on a crashed diskette in some usable form.

Review

Data is recorded on the diskette surface in concentric circles called tracks. The number of tracks is dependent upon the material used, the recording head and the reliability required. Originally, due to problems reading the inner tracks, floppy-disk drives contained a maximum of 35 tracks; these days we can use 40 tracks with very high reliability, as HDOS does.

Each track is further subdivided into ten sectors (Fig. 1). In our case these are hard sectors, each of which has an individual hole cut into the diskette, one per sector, to mark its position within the track. Sector 0 has an additional hole between the other two, which yields a total of 11 holes around the inner rim of the diskette.

Initial bytes:	Nulls
First byte:	Sync (0FD hex)
Second byte:	Volume number
Third byte:	Track number
Fourth byte:	Sector number
Fifth byte:	Header checksum

Table 1. HDOS sector header.

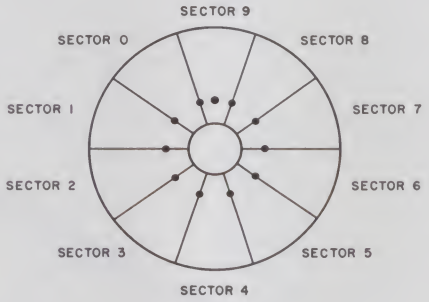


Fig. 1. Sector division of a track.

An LED and phototransistor within the floppy-disk drive uses these holes to produce sector pulses, which then can be monitored by the operating system to locate the start of a sector.

The HDOS Sector Header

HDOS could locate any sector on the diskette by first positioning the head on the correct track and then counting the number of sector pulses from the sector 0 mark generated by the drive. There is an inherent problem in such a scheme, however, in that the system could become lost by reading the wrong number of track or sector pulses.

Fortunately, HDOS does not subscribe to such a simple scheme.

During the initialization process, HDOS writes a dummy sector within each physical sector. This dummy sector consists of two parts: sector header and data area.

The leading nulls in the header (Table 1) give the system some "slop" in head positioning since they will be ignored (as will anything before the sync byte). The sync byte (0FD hex) tells the floppy-disk controller electronics exactly when a sector header is under the drive head.

As you can see, the volume, track and sector bytes uniquely identify each sector on the diskette, and the header checksum identifies any errors that occur in reading this header.

If an incorrect volume byte or header checksum is read a number of times in succession, HDOS will call the sector bad. An incorrect track or sector byte will cause a new sector search to begin (with the associated nightmarish sounds from the drive stepper motor).

Using a sector header such as this, HDOS needs merely to read one sector to determine precisely where on a diskette the head is currently positioned. There is no chance of getting lost, as with the more primitive method. Additionally, we gain a speed increase in sector searches, since HDOS does not need to spend a lot of

Address correspondence to E. Tom Jorgenson, 122 Yankee Drive, St. Charles, MO 63301.

time just in locating the desired sector. The advantages far outweigh the small amount of overhead we pay in creating and detecting the sector headers.

Notice that each sector contains the volume number of the diskette. This is done so that no read or write operation will succeed to any diskette not correctly mounted by HDOS.

Diskettes formatted on the Heath-Lifeboat CP/M system all normally have volume numbers of 0.

The Sector Data Area

Immediately following the sector header and completely within the same physical sector is the data area (Table 2).

Within the data area the nulls, sync bytes (also 0FD hex) and checksum perform the same basic functions as they do within the sector header.

The remainder of the data area consists of the actual 256 bytes in which we are really interested. During normal operations the sector formatting (header, sync bytes and checksums) is completely invisible to the operator.

Special Areas

Once INIT has written dummy sectors throughout the entire diskette, it next creates five special areas necessary for the HDOS file-handling techniques (Table 3).

Bootstrap area. The bootstrap area on the diskette contains the loader module for the operating system. When the HDOS system is cold-booted (i.e., brought up from scratch), the first four sectors (track 0, sectors 1 through 4) are loaded into memory and executed. These sectors provide the basic information necessary to locate—and load—the first part of HDOS (HDOS.SYS) into memory.

Label identification sector. The next reserved diskette area (track 0, sector 10) is used by HDOS to store some very basic facts about the diskette in question.

Initial bytes:	Nulls
First byte:	Sync (0FD hex)
Next 256 bytes	Data bytes
Last byte:	Checksum

Table 2. HDOS data area format.

Most importantly, this sector tells HDOS where to locate the start of the diskette directory and the GRT (group reservation table) sector. These two areas are the pointers to all the remaining files on the diskette.

HDOS has the ability to read files in small groups of sectors called clusters. Since these cluster sizes can apparently be varied from diskette to diskette, HDOS stores the current cluster size here also.

The remaining information within this sector is doubtless more familiar to you. This sector is also where the volume identification number and title are stored.

Reserved group table (RGT). The next sector we come upon (track 1, sector 1) contains the diskette RGT map. This sector allows HDOS to lock out bad clusters on the diskette with INIT.

Byte values within the RGT show the current status of the individual clusters in the same relative diskette positions. Usable clusters are marked with a 01 byte. Zero or any negative value locks sectors out.

When INIT formats a new diskette and prepares to write a blank directory, it first looks for a large enough number of good sectors in which to write it. Any bad sector returns will cause HDOS to lock out their clusters within the RGT. This is the only circumstance I know of that can cause a directory to be repositioned from its normal location (track 22, sector 2) on the diskette.

Track 0 is always locked out, since it is intended to be available for system use only.

HDOS directories. The directory ordinarily contains nine clusters of 22 entries each for a total of 198 possible entries (Table 4). This is actually 22 more entries than the number of files it is currently possible to write on the diskette, so don't worry about writing too many file entries under HDOS.

Bootstrap area	Sectors 1 to 4	Contains bootstrap loader for HDOS.SYS
Label identification sector	Sector 10	Diskette identification
Reserved group table (RGT.SYS)	Sector 11	Sector lock-out map
Directory (DIRECT.SYS)	Usually starting at sector 222	Actual file entries
Group reservation table (GRT.SYS)	Usually sector 238	Diskette cluster linkages

Table 3. Reserved areas on the HDOS diskette.

File entry #1
File entry #2
File entry #3
...
File entry #22
0 byte
Single byte entry length
Two-byte block number of this cluster
Two-byte block number of next cluster

Table 4. Directory cluster block format.

As shown in Fig. 1 each directory cluster points to the next cluster until the last cluster points to cluster 0. This is necessary since the initial directory read operation cannot treat the directory itself as a file—it simply doesn't know at this point where on the diskette the directory cluster will be or how to find out otherwise. Such information only becomes available once the directory is read. It's the old chicken-or-the-egg story all over again.

Directory clusters also individually specify their own internal entry lengths. Apparently it would be possible to allow for longer file names than are currently being used by patching the directory clusters. This is but one of the hidden possibilities of HDOS.

Each directory file entry (Table 5) consists of the same 23-byte format as shown.

These directory entries contain all the information necessary to tell HDOS how to read the file and where to begin (and end) reading it on the diskette. The cluster factor tells HDOS how the file is intended to be read (sectors per operation). First and last group numbers specify the starting and ending clusters within the file. The last sector within the last cluster is specified by the last sector index.

The first byte of the file name is used to mark files as deleted (with a 0FF hex byte) and to mark the end of usable entries (with a 0FE hex byte). Files recently deleted—and not overwritten—can be recovered by restoring this byte to its former ASCII value. Any directory entries after a 0FE byte here will be ignored.

See List of Advertisers on page 194

File name	8 bytes
Extension	3 bytes
Project	1 byte
Version	1 byte
Cluster factor	1 byte
Flags	1 byte
(S=200Q, L=100Q, W=40Q, C=20Q) Reserved	1 byte
First group number (FGN)	1 byte
Last group number (LGN)	1 byte
Last sector index (LSI)	1 byte
Creation date	2 bytes
Last alteration date	2 bytes

Table 5. Directory entry format.

After the file name and extension are two bytes which appear not to be currently used. These are reserved for the current project number and version. What the exact purpose of these bytes is, we can only guess—possibly they are only for internal use in Benton Harbor.

The next byte contains the cluster size to use in reading the file (usually 3). Obviously, from its appearance here, this may be varied from file to file.

Currently there are four types of file flags in use, the three we all know (SLW) and one undocumented flag, the C flag.

The C flag identifies which files must be written contiguously; i.e., in direct sequence from start to finish. This flag can be displayed by using the /JGL switch in PIP.

After the next byte, which is reserved for future use, are three bytes which uniquely identify the file clusters allocated to a file. The first two of these bytes contain the starting cluster number and the last cluster number. These values are in terms of the cluster factor stored in the label identification sector.

HDOS clusters are numbered in a sequential fashion without skewing. Track 0, sector 3, for example, is within cluster 1, and track 22, sector 2 begins cluster 111.

The third byte is the last sector index within the cluster. Since a file may only use part of a cluster, this byte tells HDOS exactly which sector is the last within the file.

Finally, we come to the file dates. The dates are encoded into two bytes each in packed manner (Table 6).

The first of these, the last alteration date, is the date we normally see displayed by HDOS. This date shows the last date on which the file was modified.

Although not normally displayed,

Bits 1 through 5	Day (1–31)
Bits 6 through 9	Month (1–12)
Bits 10 through 15	Year (Year–70)
Bit 16	0

Table 6. Packing dates in HDOS.

6502	7.45	10/6.95	50/6.55 100/6.15
6502A	8.40	10/7.95	50/7.35 100/6.90
6520 PIA	5.15	10/4.90	50/4.45 100/4.15
6522 VIA	6.45	10/6.10	50/5.75 100/5.45
6532	7.90	10/7.40	50/7.00 100/6.60
2114-L200 ns RAM		3.75	20/3.50 100/3.25
2716 EPROM (5 volt)		9.90	5/9.45 10/8.90
TMS 2532 EPROM			23.50
4116-200 ns RAM			**8 for 29.00**
S-100 Wire Wrap			2.65

DISKS
(write for quantity prices)

SCOTCH (3M) 5¼"	10/2.90	50/2.80	100/2.70
SCOTCH (3M) 8"	10/2.95	50/2.85	100/2.75
Verbatim 5¼"	10/2.45	50/2.40	100/2.35
(add 1.00 for 5¼" Verbatim plastic storage box)			
Verbatim 8" Dbl. Dens.	10/3.45	50/3.35	100/3.25
BASF 5¼"	10/2.60	20/2.50	100/2.40
BASF 8"	10/2.65	20/2.55	100/2.45

Maxell Disks in stock - write for prices

Diskette Storage Pages		10 for 3.95
Disk Library Cases	8" - 2.85	5" - 2.15

A P Products 15% OFF
A P HOBBY-BLOX 15% OFF
All books 15% off

STAR RS232 Modem	**$135**
SYM-1	209
KTM 2/80	349
EPSON MX-80	**Call**
EPSON MX-70	**Call**
Itoh STARWRITER	1500
Leedex Monitor	129
Watanabe Plotter	1145
Centronics 737	790
C-10 Cassettes	10/5.65
ZENITH DATA SYSTEMS	
Zenith Z19	735
Zenith Z89 - 48K	2150
fullFORTH + for PET	65
PASCAL for PET	$75
PET Disk Assembler	65
Apple II+	**Call**
NEC Spinwriter	2500

COMMODORE PET-CBM
Write or call for quotes
NEW 8016/32 80 column screen
NEW 8050 950K Dual Drive
EDUCATIONAL DISCOUNTS AVAILABLE



ATARI 800 $777
ATARI Software 20% OFF
EDUCATIONAL DISCOUNTS available

APPLE II+
BELL & HOWELL

WRITE FOR CATALOG
Add $1.25 per prepaid order for UPS shipping

A B Computers ↙121
115 E. Stump Road
Montgomeryville, PA 18936
(215) 699-5826

WHY USE OUR INTEGRATED ACCOUNTING SYSTEM (IAS)?

IT'S EASY TO USE. Prompts guide the user through each entry and then checks the entry to make sure only proper data are saved on the disk. It won't let you post an out-of-balance entry. IAS includes a complete users manual that tells you what each program does and how to use it. We even include a practice disk so you can begin making entries within minutes after receiving our IAS.

IT'S FAST. Our proprietary Skip Sequential™ file structure lets you save data on the disk at maximum speed without wasting disk space. We've also minimized keystrokes to make more efficient use of your operator's time.

IT GIVES YOU THE INFORMATION YOU NEED. The complete IAS package has over 30 reports, listings and file printouts so you can monitor the firm's fiscal position at all times, including instantaneous account balances. Our efficient file structure also means there's no monthly "erasing" of data files. You'll appreciate this if you're ever required to reconstruct an audit trail for some past month.

WE SUPPORT OUR SOFTWARE. Since IAS is not a translation of someone else's work, but was written by us from scratch, we know it cold. If you ever have a problem, we can answer it for you. We also give you full credit on any future packages that might replace the one you purchased. Our record over the past three years has been a good one, and we'll do everything we can to keep you a satisfied customer.

PRICE. The General Ledger costs $125.00; the complete IAS package (GL, AP, AR and PR) is $350.00. The user's manual is $20.00 (refunded with purchase). Since IAS is designed for the North Star DOS and Basic and will run in as little as 32K of memory, you don't need to buy more memory, a different operating system and Basic. This savings alone could pay for the software—and then some. You can pay a lot more, but shouldn't you check us out before you do?

master charge
THE INTERBANK CARD

ECOSOFT ↙82
P.O. Box 68602
Indianapolis, IN 46268
(317) 283-8883
(Phone Orders Only)

the directory entries also contain the original creation date of the files. This is encoded within the last two bytes of the file entries.

Group reservation table (GRT). HDOS locates file clusters on a diskette dynamically. If a file uses cluster 36, for example, the next cluster within the file is not necessarily cluster 37. It is possible to link any two clusters not otherwise in use together within a file.

This is done to make maximum usage of the empty disk area. Imagine that (as under older systems) an operating system were always to write a new file into the largest blank space available at the time. The system would work very well until it reached a point where it had a large file to write into a number of smaller empty spaces. The system could not then use the smaller spaces until they could be squeezed together into at least one space large enough to contain the current file.

This is the advantage of a dynamic file scheme. The system makes use of all the available blank space without concerning itself with whether or not it is in one large group or fragmented all over the disk. HDOS really gives the ability to do both (remember the C switch), although it normally uses the dynamic mode.

For this reason, the directory only points to the beginning and end of a file. The actual cluster linkage is stored within the GRT.

Groups of clusters are strung together within the GRT to form what HDOS calls chains. Even unused clusters are linked into a free chain.

When HDOS begins reading a file, it starts at the cluster specified by the directory entry. The next cluster read will be pointed to by the byte in the first cluster's relative position within the GRT. This process continues until the entire file has been read. The byte in the last cluster's position contains zero—which verifies that the file entry within the directory is correct, since the last group numbers should match.

In this manner, if the last cluster we read was 26, byte 26 in the GRT contains the next cluster number we should read (or 0 if we are finished).

The free chain is linked to cluster 0. This we can do since cluster 0 is part of the system area and is locked out by the RGT.

Corrupt Diskette Structures

One problem with such a complex dynamic file scheme is that it can lead to a rather spectacular diskette demise.

If the RGT, GRT or directory are overwritten, or written incorrectly, our file linkage chains may no longer match the directory entries or usable sector map.

Perhaps two directory entries reference the same diskette cluster or a file attempts to link to a lock-out sector. Such situations indicate corruption of the diskette file structure.

When HDOS tries to mount a diskette, these linkages are tested (and in some cases updated). If any contradictions are found you will get that wonderful "Disk Structure Is Corrupt" message and an instruction to contact the Heath technical assistance department. This is because Heath is trying to protect us from further damaging the file structure by preventing further diskette write operations.

A better way of handling this situation might have been to make the

Powerful Utilities To Get More Out Of Programming your TRS-80☆...

BOSS 2.2 Back to work everybody the BOSS is BACK! A BASIC Operated Single Stepper -monitor your basic programs, line by line, while they are executing! ..... c $ 24.95
..... d 29.95

VFU Visual File Utility - Allows you to: EXECUTE or PURGE a basic or machine language file; COPY a file from one disk drive to another or HARD copy your directory, ALL with single key entries ..... c $ 19.95
..... d 24.95

ULTRAZAP Disk modification utility - Read, Write, Copy, Purge or ZAP! any byte or sector on your diskette. The same utility that comes with ULTRADOS ..... c $ 19.95
..... d 24.95

SPOOL Parallel port, print spooler - Define spooler buffer size, lines per page, and characters per line, allows continued use of CPU during the printing process. A True RAM Spooler! ..... c $ 19.95
..... d 24.95

GEDIT Global Editor - Allows the user to search and replace any keyword command, variable or string with incredible speed, even pack strings for high speed graphics ..... c $ 19.95
..... d 24.95

RENUM-80 Program Renumberer - Tape or Disk operation, ultra fast, accurate operation ..... c $ 5.95

Lower Case Driver - Will work with all Model I lower case conversions. Shortest available, only 68 bytes ..... c $ 5.95

Epson Driver - For the Epson MX-80 printer, allows the use of all the functions available on today's most popular printer - Works with the Model I or Model III, cassette or disk ..... c $ 5.95

OR,

Get most of these utilities and much, much more with...

ULTRADOS!
Now only $ 94.95!

LEVEL IV PRODUCTS ↙176

For Orders Only 1(800) 521-3305
For Information (313) 525-6200
32461 Schoolcraft Rd.,
Livonia, Michigan 48150

VISA MasterCard

☆ A trademark of Tandy Corporation

↙See List of Advertisers on page 194



THE SPIKE-SPIKERS™
with Transient Absorber and R.F. Filters

Protects Computers & Sensitive Equipment
from most Transients & "Hash" Interference
Helps prevent Software "glitches" and unexplained memory losses



Deluxe Power Console
with Transient Absorber & RF filters
8 individually switched 120 Vac
Grounded outlets. Divided into 2
filtered circuits. Main on/off switch
Fuse and Indicator Light
$79.95

POWER LINE PROBLEMS??

Mini-I Transnt. Absorb. Only **$34.95**
Mini-II Transnt. Absorb. + RF "Hash" Filt. **$44.95**
Wall Mounted 2 Sockets

KAGLO ELECTRONICS CO., INC.
DEPT. M C
COLONY DRIVE INDUSTRIAL PARK
6584 RUCH ROAD E ALLEN TWP
BETHLEHEM PA 18017
✓222

PA Residents add 6%
dealers invited

ORDER FACTORY DIRECT
215-865-0006
OUT OF STATE ORDER TOLL FREE
800-523-9685

TRS-80 & OTHER NEEDS FILLED FOR LESS

+ + + COMPATIBLE DISK DRIVES WITH POWER SUPPLY AND CASE—90 DAY WARRANTY + + +
* 40 TRACK (102,400 BYTE/DISK) DISK DRIVE WITH P.S. AND CASE **$299**
* 8 IN. DRIVE & P.S./CASE **$689** WITH P.S./CASE FOR 3 DRIVES **$879**
* 80 TRACK (204.8K BYTE) **399**
* 4-DRIVE CABLE **$28** ** 10 DISKS-5 IN. @ **$24**-8 IN. @ **$36** HARD CASE **$3 & 5**

BASE 2 PRINTER **$599** EPSON MX—80 PRINTER—CALL MICROLINE 80 PRINTER **$399**

* CENTRONICS 737 **$699** MICROLINE 82 **$549** CABLE @ **$25**
* MICROLINE 83 **$829**
* LEEDEX 12 IN B&W MONITOR **$114** LEEDEX 12 IN B&G MONITOR **$138**
* APF 10 IN B&W MONITOR **$109**
* 300 BAUD MODEM (ORIG/ANS) **$115.** AND UP + + + + + + + + 16K MEMORY SET (200 NANO) **$23**
* 16K MODEL III RADIO SHACK SYSTEM **$849**
* APPLE, ATARI, RADIO SHACK HARDWARE/SOFTWARE DISCOUNTED, A/R, A/P, G/L, P/R FOR **$200 or $59 ea.** (MODEL 1) & **$329 or $80 ea.** (MODEL 2). APPLICATIONS INTERACT & ARE COMPLETE & PROFESSIONAL. WILL RUN ON OTHER COMPUTERS. THIS IS A SPECIAL INTRODUCTORY PRICE.
* ASK FOR FREE FLYER WITH OUR LOW PRICES—DEALER INQUIRIES INVITED MASS. RESIDENTS ADD 5% TAX—F.O.B. TEWKSBURY—FREIGHT EXTRA
M/C, VISA OR CHECK ACCEPTED. TRS-80 IS A REG. TRADEMARK OF TANDY CORP.
✓140

OMNITEK SYSTEMS 1899 MAIN ST., TEWKSBURY, MASS. 01876 CALL 617/851-4580

16-K MEMORY 8/17.95
RAM $ 100 PCS Eproms 100 PCS
4116 200ns 8/17.95 $1.90
2716 (5v) 450ns $6.95 8/6.35ea
2114L 300ns 8/21.25 $2.35
2732 (5v) 450ns 17.75 8/15.00ea
4164 200ns $27.00 $27.00

CHIPS & DALE,
P.O. Box 31607
Seattle Washington
Zip 98103

Add $2.00 Shipping & Handling
C.O.D. $2.00, Wash. residents
add 5.4% Sales Tax
1-206-524-9126
✓170

all Chips are fully guaranteed


CHIPS & DALE

Subscription Problem?

Kilobaud Microcomputing does not keep subscription records on the premises, therefore calling us only adds time and doesn't solve the problem.

Please send a description of the problem and your most recent address label.

Kilobaud Microcomputing
Subscription Dept.
PO Box 997
Farmingdale, NY 11737



Thank you and enjoy your subscription.

Happy Hands
Radio Shack
DEALER
Authorized Dealer #G-089
Offers Discounts on All
TRS-80™
COMPUTERS

We Have What You Are Looking For
- ☐ FULL FACTORY WARRANTY
- ☐ PROMPT SHIPPING
- ☐ AVAILABLE SERVICE CONTRACTS
- ☐ DISCOUNTED PRICES COMPARABLE TO ANY OTHERS
- ☐ NO TAX ON OUT OF STATE SHIPMENTS

Call Collect For Prices
And Shipping Schedules

505-257-7865
or write
HAPPY HANDS-RADIO SHACK
P.O. DRAWER I
RUIDOSO, NEW MEXICO
88345
✓243

diskette mount as read-only. Currently the corrupted diskettes can only be read using absolute track and sector utilities (such as the ABSDUMP utility available from HUG).

Summary

HDOS is an amazingly sophisticated system as microcomputers go. A number of file-handling features are incorporated which are not available on many similarly priced systems.

It is appropriate indeed that Heath Company is beginning to free up a great deal of information to its users. Certainly this article would never have been possible had this not been the case. Heath has always been more responsive to its users than its competitors have been, and just recently this has also become true of its response to its computer hobbyist customers.

I am sure that, as more and more information such as this becomes apparent, we Heath users will see an explosion of very powerful utilities coming our way.

Perhaps the H8/H-89 will finally take its rightful place among the giants of the industry. ■



if He'd used select™ it wouldn't have taken seven days

Learn SELECT* in just 90 minutes. A whole new word processing *software* concept that kicks the coded key habit and frees you from complicated instruction manuals. *SELECT* is fast. *SELECT* is logical. With single key mnemonics, you'll use dozens of commands that instantly access the rich capabilities of this system. There's nothing like it.

Simply hit "C" and you'll be ready to Create a document.
Key "I" and you'll be in the Insert mode.
Key "M" and Move entire blocks of text . . . and key dozens more.

That's all there is to it. You'll get all that word processing software promises . . . plus a few surprises.

SELECT with SUPERSPELL.* The only microcomputer software with an integrated spelling dictionary. To proof your text all you do, of course, is to key "S". *SUPERSPELL* with its 10,000 word dictionary scans your text at computer speed then displays and corrects all your typing errors. You can increase *SUPERSPELL*'s word power and customize the dictionary by adding new words, one at a time. Ask to see it today at your local dealer.

SELECT with SUPERSPELL . . . just a little byte more.™

SELECT will run on any machine that uses CP/M or MP/M** or its derivatives. It needs 40K of RAM and two disk drives. Special version now available for Radio Shack Mod II*** and Apple II****

* SELECT and SUPERSPELL are trademarks of Select Information Systems Inc.
** CP/M and MP/M are trademarks of Digital Research
*** A trademark of Tandy Corp.
**** A trademark of Apple Computer Inc.

select™ INFORMATION SYSTEMS

✓374

919 Sir Francis Drake Boulevard • Kentfield, California 94904 • (415) 459-4003

✓See List of Advertisers on page 194



ADVENTURE INTERNATIONAL

NEW



ADVENTURE by SCOTT ADAMS

"SPECIAL SAMPLER" - Never tried ADVENTURE? This special inexpensive sampler complete with 3 Treasures is a cut-down version of our large Adventureland. Guaranteed to supply hours of enjoyment: Try an ADVENTURE today!

ADVENTURELAND - You wander through an enchanted world trying to recover the 13 lost treasures. You'll encounter wild animals, magical beings, and many other perils and puzzles. Can you rescue the Blue Ox from the quicksand? Or find your way out of the maze of pits? Happy Adventuring....

PIRATE'S ADVENTURE - "Yo ho ho and a bottle of rum..." You'll meet up with the pirate and his daffy bird along with many strange sights as you attempt to go from your London flat to Treasure Island. Can you recover Long John Silver's lost treasures? Happy sailing, matey. . . .

MISSION IMPOSSIBLE ADVENTURE -Good morning, your mission is to... and so it starts. Will you be able to complete your mission on time? Or is the world's first automated nuclear reactor doomed? This one's well named. It's hard, there is no magic, but plenty of suspense. Good luck. . . .

VOODOO CASTLE - Count Cristo has had a fiendish curse put on him by his enemies. There he lies, with you his only hope. Will you be able to rescue him or is he forever doomed? Beware the Voodoo man. . . .

THE COUNT - You wake up in a large brass bed in a castle somewhere in Transylvania. Who are you, what are you doing here, and WHY did the postman deliver a bottle of blood? You'll love this ADVENTURE, in fact, you might say it's Love at First Byte. . . .

STRANGE ODYSSEY - Marooned at the edge of the galaxy, you've stumbled on the ruins of an ancient alien civilization complete with fabulous treasures and unearthly technologies. Can you collect the treasures and return or will you end up marooned forever?. . . .

MYSTERY FUN HOUSE - Can you find your way completely through the strangest Fun House in existance, or will you always be kicked out when the park closes?. . . .

PYRAMID OF DOOM - An Egyptian Treasure Hunt leads you into the dark recesses of a recently uncovered Pyramid. Will you recover all the treasures or more likely will you join its denizens for that long eternal sleep?. . . .

GHOST TOWN - Explore a deserted western mining town in search of 13 treasures. From rattlesnakes to runaway horses, this ADVENTURE's got them all! Just remember, Pardner, they don't call them Ghost Towns for nothin'. (Also includes new bonus scoring system!)

SAVAGE ISLAND — PART 1 - WARNING FOR EXPERIENCED ADVENTURERS ONLY! A small island in a remote ocean holds and awesome secret. Will you be the first to uncover it? NOTE: This is the first of a larger multi-part Adventure;, it will be necessary to purchase additional packages to complete the entire Adventure.

ADVENTURE PROGRAM PARAMETERS

LANGUAGE	Machine
NUMBER OF PLAYERS (min/max)	1/1
AVG. COMPLETION TIME	1 month
SUGGESTED AGE GROUP	12 to Adult
RECOMM. FOR NOVICE?	(0-2) Yes
	(3-10) No
CLASSIFICATION:	Compu-novel
SOUND?	No
GAME SAVE FEATURE?	Yes
MULTIPLE SKILL LEVELS?	No
GRAPHICS ORIENTED?	No
REAL TIME?	No
SPECIAL EQUIPMENT:	None

Adventures by Scott Adams
AN OVERVIEW

I stood at the bottom of a deep chasm. Cool air sliding down the sides of the crevasse hit waves of heat rising from a stream of bubbling lava and formed a mist over the sluggish flow. Through the swirling clouds I caught glimpses of two ledges high above me: one was bricked, the other appeared to lead to the throne room I had been seeking.

A blast of fresh air cleared the mist near my feet and like a single gravestone a broken sign appeared momentarily. A dull gleam of gold showed at the base of the sign before being swallowed up by the fog again. From the distance came the angry buzz of the killer bees. Could I avoid their lethal stings as I had managed to escape the wrath of the dragon] Reading the sign might give me a clue to the dangers of this pit.

I approached the sign slowly.

And so it goes , hour after hour, as you guide your microcomputer through the Adventures of Scott Adams in an effort to amass treasures within the worlds of his imagination.

By definition, an adventure is a dangerous or risky undertaking; a novel, exciting, or otherwise remarkable event ot experience. On your personal computer, Adventure is that and more.

For the user, playing Adventure is a dangerous or risky undertaking in that you better be prepared to spend many addictive hours at the keyboard. If you like challenges, surprises, humor and being transported to other worlds, these are the games for you. If you dislike being forced to use your common sense and imagination, or you frustrate easily, try them anyway.

In beginning any Adventure, you will find yourself in a specific location: a forest, on board a small spaceship, outside a fun house, in the briefing room of a nuclear plant, in a desert, etc.

By using two-word commands you move from location to location manipulate objects that you find in the different places, and perform actions as if you were really there. The object of a game is to amass treasure for points or accomplish some other goal. Successfully completing a game, however, is far easier to state than achieve. In many cases you will find a treasure but be unable to take it until you are carrying the right combination of objects you find in the various locations.

How do you know which objects you need? Trial and error, logic and imagination. Each time you try some action, you learn a little more about the game. Which brings us to the term "game" again. While called games, Adventures are actually puzzles because you have to discover which way the pieces (actions, manipulations, use of magic words, etc.) fit together in order to gather your treasures or accomplish the mission. Like a puzzle, there are a number of ways to fit the pieces together; players who have found and stored all the treasures (there are 13) of Adventure #1 may have done so in different ways.

In finding how the pieces fit, you will be forced to deal with unexpected events, apparent dead ends and Scott's humor, which is one of the best parts of the puzzles.

If you run into a barrier like not being able to discover more rooms, don't give up. Play the game with some friends; sometimes they'll think of things you haven't tried.

While I pondered how to reach the throne room — which I was sure contained the treasures of Croesus — the fog grew thicker and the hours passed. I realized I would not be able to outwit Adams today...but maybe tomorrow. I marked my present location on my tattered map and began the long trip to the surface. As I dragged myself off to bed, I thought about other possible Adventures.

But enough for tonight. Tomorrow — another crack at the chasm.

—by Ken Mazur

Reprinted with permission from
PERSONAL COMPUTING MAGAZINE, FEB. 1980
Copyright 1980 PERSONAL COMPUTING MAGAZINE
1050 Commonwealth Ave., Boston, Mass. 02215



A Division of Scott Adams, Inc.

Adventure International • Box 3435 • Longwood, FL 32750

CATALOG AND TOLL-FREE ORDER NUMBER: (800) 327-7172

IN FLORIDA (305) 862-6917

SHIPPING AND HANDLING CHARGES ARE EXTRA
PRICES ARE SUBJECT TO CHANGE WITHOUT NOTICE

ai

TECHNOLOGICAL BREAKTHROUGH!!!

CLASSIC ADVENTURE

FIRST OF THE "OTHER-VENTURE" SERIES

WHY ANOTHER VERSION OF ADVENTURE?

Since Will Crowther and Don Woods created it years ago, ADVENTURE has been programmed to run on nearly every computer known to man. The original Fortran version ran on a large PDP machine requiring nearly 300K of storage. At least three other versions of ADVENTURE exist for the APPLE. Some claim to be the only complete version; some claim to fill whole disks with program and data. To date, however, all require diskette access during the game to retrieve text for display on nearly every command. All added "features" of their own, changed some of the original text, or omitted something from the original.

In this version of ADVENTURE you get nothing but the real thing. NOTHING has been added or left out. By using a text compression technique seldom used on microcomputers, the nearly 44K bytes of text fit in less than 25K. This means no disk access is needed during the game and that it can be played on 48K systems without disk drives. Both tape and Disk versions are identical, only the media is different. The tape version includes instructions for making a disk copy. All versions work with either 3.2 or 3.3 APPLE disks and APPLE 2 or APPLE 2 Plus machines.

ALSO INCLUDES COMPLETE SAVE & RESTORE GAME FEATURES

SCOTT ADAMS SEAL OF APPROVAL



CLASSIC ADVENTURE
by John Rausch

041-0106 TAPE to DISK.....$14.95
48K Apple 2

042-0106 DISK.....$20.95
48K Apple 2

NEW

APPLE - ATARI

SOFTWARE AUTHORS!!

Join the ranks of the leading writers in the industry by becoming an **Adventure International** author! We are looking for games (arcade, "Adventure"-style, simulation, role-playing) and outstanding utility packages for all of the major computers. Only the best will do! If you have a program which you feel would fit into our current catalog, then we invite you to submit it for review. Send a machine-readable copy, a description of any hardware needed, complete documentation and loading instructions to us in care of the **Software Review Board.** (Due to the tremendous number of programs we receive monthly, we can only return a submission if you include a stamped, self-addressed envelope.)

SOFTWARE DEALERS!!

If you aren't carrying the **Adventure International** line of products, then you're missing out on the fastest growing and most asked for programs in the industry today. We have over 150 quality products, with more being added every month. We offer our dealers support through national advertising, professional packaging and an **established** market. If you would like more information on joining our dealer family, call our toll-free nimber **(800) 327-7172** and ask for a dealer representative.

If you own an Apple, Atari, TRS-80 or other desk-top computer, then we have the programs for you! Order from your favorite software dealer or call toll-free **(800) 327-7172** today to order or for your free catalog.

Adventure INTERNATIONAL

✓393 A DIVISION OF SCOTT ADAMS, INC.

CATALOG & ORDERING
TOLL FREE HOT LINE (800) 327-7172

BOX 3435 • LONGWOOD, FL 32750
Call toll free for catalog (800) 327-7172

*TRS-80 is a trademark of the Tandy Corporation

Write assembly-language programs for your Atari with this powerful ROM cartridge.

Atari's Assembler Editor

By Robert W. Baker

The Atari Assembler Editor cartridge (CXL4003) contains three separate programs for developing 6502 assembly-language programs. It is available from any Atari dealer for $60.

The Editor helps you write programming statements in a form the Assembler program understands. The Assembler program then takes the program statements you create in the edit step and converts them to machine code. A handy Debugger program helps you trace through the program steps by running your program a step at a time while displaying the contents of important internal 6502 registers.

You can also display and/or change registers or memory, move memory, list memory, disassemble, assemble single instructions into memory, execute code and so on.

The accompanying manual assumes the user has read some other book on assembly language or is already familiar with it. It also assumes you know how to use the screen editing and control features of the Atari 400/800 computer system. These features are the same as those used in Atari BASIC. Thus, the manual primarily explains the operation of the Assembler Editor cartridge. It does not explain 6502 assembly-language programming or programming techniques.

You need not have any equipment except the computer system console, your television or video monitor for display and the Assembler cartridge. However, without a permanent storage device (tape or disk), you will have to enter your program on the keyboard each time you want to use it. For assembly-language programs this task is much more tedious and time-consuming than with BASIC programs. Therefore, an Atari 410 recorder or 810/815 disk drive is a practical necessity when you use the Assembler Editor cartridge.

The Assembler Editor cartridge was designed to be used with the Atari disk drives and DOS II. If you are currently using DOS I, the 9/24/79 version of DOS, then you must patch several locations within DOS to be compatible with the Assembler Editor cartridge. The instructions for this are included in the Assembler Editor manual.

Even though the programs were designed to be used with a disk, they are still usable with a 410 program recorder. If you're going to be doing any reasonable amount of assembly-language programming, you'll probably also want to have one of the Atari printers so you can get printed copies of the assembly listings. This can be helpful when debugging programs.

Storing the Program

All assembly-language programs are divided into two parts: a source program, which is a human-readable version of the program, and the object program, which is the computer-readable version of the program. With the Atari assembler, these two versions of the program are distinct and must occupy different areas of RAM memory.

The source program must exist in RAM memory in order to assemble it, but the object program it produces must be put in a different area of memory, so as not to destroy the source program. Therefore, the first decision you must make when writing the source program involves the allocation of available memory space.

Normally, when you program in BASIC, the system automatically allocates portions of memory for the program, data, display space, etc. This is not quite the case with the Assembler Editor cartridge. You now can place your programs anywhere in memory that you wish, but you must allocate memory wisely.

The Atari computer system uses low memory for its own internal needs. The amount used depends on whether or not DOS is loaded into RAM. In any event, the Assembler Editor cartridge will automatically place your source program into mem-

Robert W. Baker (15 Windsor Drive, Atco, NJ 08004) writes the monthly PET-pourri column in Microcomputing.

```
                10 ;
                20 ;SAMPLE PROGRAM
                30 ;
0000            40          *=    $0600
00CC            50 TEMPL    =     $CC         TEMPORARY HOLDING
00CD            60 TEMPH    =     $CD         LOCATIONS
00D4            70 RESLTL   =     $D4         ADR FOR RESULTS
00D5            80 RESLTH   =     $D5         ADR FOR HI RESULT
                90 ;
0600 68         0100 EXCLOR PLA
0601 68         0110        PLA
0602 85CD       0120        STA   TEMPH       SAVE HI BYTE
0604 68         0130        PLA
0605 85CC       0140        STA   TEMPL       SAVE LO BYTE
0607 68         0150        PLA
0608 45CD       0160        EOR   TEMPH       PERFORM HI EXCLUSIVE OR
060A 85D5       0170        STA   RESLTH      STORE RESULT
060C 68         0180        PLA
060D 45CC       0190        EOR   TEMPL       PERFORM LO EXCLUSIVE OR
060F 85D4       0200        STA   RESLTL      STORE RESULT
0611 60         0210        RTS
0612            0220        .END
```

Sample program. Graphics format instructions.

ory starting with the first free memory location.

As you enter and/or delete source code, the edit text buffer grows or shrinks accordingly. You also have to remember that a small area above the edit text buffer is used by the assembler for a symbol table when assembling your source program.

The problem now is where to store the object code produced by the assembler. If you put the object code into an area used by the operating system, DOS or display RAM, you'll probably cause the computer to crash and lose all your typing. Even more chaos can result if you try to put the object code into the area used by the edit text buffer. The only safe place to put your object code is in the empty memory area between the top of the edit text buffer and the bottom of the display RAM.

You can find out approximately where the empty memory area starts by using the editor SIZE command. The Assembler Editor will respond with three hexadecimal numbers, the last two representing the bottom and top addresses of the empty area. The first number indicates the bottom of usable RAM, typically about 180 bytes before the start of the edit text buffer. With these values you can estimate a reasonable starting location for your program, if you know the approximate size of the program.

Another alternative exists if your program and data will fit into 256 bytes. The 256 locations of page 6 ($0600–$06FF hex) have been set aside for your use by the Assembler Editor. This is a good safe way to start when you are still learning assembly-language programming and you are writing only short programs. Later, as your programs grow larger, you can move them off page 6 and use page 6 for data and tables.

Still another strategy is to bump the edit text buffer containing your source program upward in memory, leaving some empty memory space below it. A special Assembler Editor command, LOMEM, can be used to specify the new bottom address of the edit text buffer. However, if you intend to use it, this command must be the first command entered after turning on the computer with the Assembler Editor cartridge installed. There is no check on the value entered, so you must be careful not to set it too low, so as to crash the system, or too high, so there isn't room for the source program.

Creating the Source Program

The actual source program you write will contain many program statements representing machine instructions or assembler directives. Each statement can be up to 106 characters long. Any statement can have up to five parts, or fields: the statement number, a label, the operation code or assembler directive, an operand and a comment. These fields appear in successive positions in the statement line, each separated by a space.

Every statement must start with a statement number, just like the lines of a BASIC program. The Editor automatically puts the statements in numerical order for you. Numbering by tens or some other large increment allows space for inserting new statements. The Editor provides an automatic numbering mode for easy entry of new programs, and a command to renumber all existing statements.

A label, if used, occupies the second field of a statement. The label must start with a letter and contain only letters and numbers, but can be any length (up to 106 characters). Typically, labels are three to six characters long. Remember that each label is placed in a symbol table during assembly, using up valuable memory space. Thus, short labels help conserve memory. A label, if present, is assigned the current memory location before assembling the remainder of the statement. Each label can then be referenced by other instructions or statements as needed.

The operation code mnemonic indicates which 6502 machine instruction is to be assembled, and the standard 6502 mnemonics are used. The operand field, if required, is expected by the assembler and must be present. The assembler allows operands to be specified as hexadecimal or decimal numbers, symbols or expressions. Expressions can contain addition, subtraction, multiplication, division and logical AND operations. Instruction addressing modes use the standard 6502 assembly-language formats, making them easy to understand and recognize.

Comments can follow the operand field, or you can have a full line comment preceded by a semicolon. All comments are ignored by the assembler, but are printed in the program listing. With assembly-language programming it is important to include good comments to document the program logic for later reference.

Commands

The Editor provides several commands that make creating and editing source programs easier and faster:

NEW—clears the edit text buffer.

DEL—deletes specific statements from the source program. It can delete a single statement or a range of statements.

NUM—assigns statement numbers automatically as you enter source statements. Thus, you don't have to worry about numbering lines and assigning unique numbers; simply type in the source statements in order. Also, if NUM is entered later, it starts assigning statement numbers after the last statement currently in the source program. This makes it easy to add to an existing program.

REN—renumbers statements in the source program.
FIND—finds a specified character string in the source program. You can quickly find only the nth or all occurrences of the specified character string.
REP—replaces one string with a different string. You can perform the replace for a specific number or range of statements, or for all statements.
LIST—displays or saves a source program. The program can be listed to the display, printer, cassette tape or a diskette file. If you wish, a single statement can be listed.
PRINT—works just like the list command except statements are printed without the statement numbers.
ENTER—retrieves a source program from cassette or disk. Normally the edit text buffer is cleared before retrieving the indicated source program. An option to this command does, however, allow merging a program from tape or disk with something already in the edit text buffer.
SAVE—saves an object program on tape or disk. The hexadecimal starting and ending addresses of the area to be saved must be specified in the command.
LOAD—retrieves an object program previously saved on tape or disk. The object program is always reloaded in the same area of memory from which it was originally saved.

The ASM command is used to assemble the desired source file. It has various options that let you select various ways of handling the source program, assembly listing and object program. Normally the assembler assembles the source program in the edit text buffer. If you have a disk drive, the assembler can assemble the source program directly from a disk file. This function is not available if you only have a 410 program recorder.

The assembly listing is normally displayed on the screen as the assembly proceeds, but can also be printed or saved on tape or disk.

The object program is normally stored directly in RAM memory, at the address specified in the source program. If you have a disk drive, you can optionally have the object program stored directly in a disk file. Note that when you have a disk drive, the memory restrictions are somewhat relaxed since you can use disk files for the source and object. They do not have to be in memory at the same time, as when using cassette tape.

The assembler itself has several directives that you can use to control the assembler operation or create data constants. Directives are instructions to the assembler, and, in general, do not produce any assembled code or object output.

The .OPT directive controls generation of the assembly listing and page spacing, generation of the object program and the handling of error messages during assembly.

The .TITLE and .PAGE directives are most useful when the assembled program is listed on a printer. The .TITLE directive forces a top-of-form (or six blank lines) on the printer and prints a specified page heading. The .PAGE directive operates similarly, but adds a subtitle line below the title heading.

A .TAB directive allows redefining the positions for each statement field

SURPLUS BUYS of the YEAR!!

The Most Sought After, Most Desireable

DIABLO 10 MEG DISK DRIVES

Model 44B

- 5 Mb Fixed, 5 Mb Removable
- 115 VAC 60 Hz
- Takes 5440 Disk
- Industry Std. Drive
- Daisy chain up to 4
- I/O Data included



- Built-in power supplies
- 200 tracks / inch
- 256 Bytes per sector
- 24 sectors / track
- 19,583 sectors / platter

Special Offer!!!

REFURBISHED & FULLY OPERATIONAL!

Only $2200.00 each Includes 2 FREE DISK CARTRIDGES

MODEL 44A DISK DRIVE 10 Mb, earlier design, same I/O. Used, whole, untested. Includes schematics & data ..... $1200 ea.

MODEL 43 5 MEG DISK DRIVE 100 TPI, good cond., used, whole, untested. With data and schematics ..... $795 ea.

MODEL 429 POWER SUPPLY ±24VDC @ 6 amps, 5V @ 6 amps. Required for both the 44A and 43 drives (above) ..... $75.00 ea.

OTHER BARGAINS

***SELECTRIC-II Typewriter/Printer**

With stepper-driven platen & carrier. Exciting possibilities. Removed from sophisticated word processors. Solenoids (standard selectric corresp. code) self contained. Mostly whole, "as-is", with schematics and data ..... **Only $399.00 ea.**



RO*SELECTRIC-II Printer

"Receive-only" (no keyboard). Features X&Y steppers plus all solenoids & standard IBM Selectric-II printer mechanism. Takes Tech-III ribbon cartridges. Less case and platen, mostly whole, "as-is". Schematics included ..... **Only $129.00 ea.**

Disk Drives: Add $30 for Hdlg. & Pkg. Pay Shipping on Delivery
Selectric Printers: Add $20 for Hdlg. & Pkg. Pay Shipping on Delivery
**Reg. Trade-Mark of IBM Corp*

CFR Associates, Inc. ↙110

MAIL ORDERS: Box 144, Newton, N.H. 03858

PHONE ORDERS: 617/372-8536 (Sorry, No Collect Calls) MasterCharge & VISA Welcome

WAREHOUSE: 18 Granite Street Haverhill, Mass. 01830

Desk Main/Frame

Desk Main/Frame

LOW COST & ATTRACTIVE STYLING

- MAIN/FRAME INTEGRATED INTO FURNITURE QUALITY DESK
- ELECTRONICS PACKAGE SLIDE MOUNTED FOR EASY ACCESS
- SUPPORTS TWO 8" FLOPPY DRIVES FROM SEVERAL MANUFACTURERS (DRIVES NOT INCLUDED)
- 10 SLOT MOTHERBOARD INCLUDES CONNECTORS
- POWER SUPPLY FOR DRIVES AND CARDS
- DESK AND MAIN/FRAME AVAILABLE SEPARATELY
- MATCHING PRINTER DESK AVAILABLE



WRITE OR CALL FOR OUR BROCHURE WHICH INCLUDES OUR APPLICATION NOTE: 'BUILDING CHEAP COMPUTERS'

INTEGRAND ↙77

8474 Ave. 296 • Visalia, CA 93277 • (209) 733-9288

We accept BankAmericard/Visa and MasterCharge

in the assembly listing if the default values are unsuitable.

The .BYTE, .DBYTE and .WORD directives provide a simple way of generating numeric or character string data constants. These directives generate object output when assembled. The .BYTE directive generates single-byte values. The .DBYTE directive generates two-byte constants with the high-order byte first. The .WORD directive also generates two-byte constants, but in the standard 6502 address format (low-order byte first).

Another directive lets you define a symbolic label as a predefined or computed value. For more advanced programmers, there's an .IF directive for conditional assembly. This lets you control assembly of selected portions of the source program, depending on the value of an indicated variable or expression.

The * = directive defines the starting location for the assembled object program, and must be specified. Also, an .END directive must be specified at the end of the source program to tell the assembler where to stop.

The Debugger is called from the Editor by the BUG command. Once activated, you can use the Debugger to help analyze the execution of your program and then return to the Editor when ready to edit or reassemble. It should be noted that all values entered or displayed by the Debugger are in hexadecimal. The various Debugger commands include:

DR—display 6502 register
CR—change 6502 register
D—display memory
C—change memory
M—move memory
V—verify memory
L—list memory with disassembly
A—assemble one instruction into memory
T—trace operation
S—single-step operation
G—go, execute program
X—return to Editor

Program Features

The manual appendices include a list of Assembler Editor error numbers, assembler mnemonics and directives, the ATASCII character set and hints on using the Assembler cartridge to best advantage. Several interesting sample programs are included to illustrate using assembly language on the Atari.

The first sample program illustrates interfacing an assembly-language routine to a BASIC program. The second example shows how to produce higher-quality sound effects than you'd normally get in BASIC. The third sample program is much longer than the first two, and produces a pleasing animated pattern on the screen. It shows a great deal about the display system of the Atari computer, but really only scratches the surface.

The last program is probably the most interesting. It illustrates the display list interrupt and shows how to get more than five colors on the screen. The sample program produces all 128 colors on the screen at the same time.

For those who haven't seen this yet, the Sample program is a sequence of instructions that tells the computer what graphics format to use in putting information on the

DR. DALEY OFFERS SOFTWARE FOR EVERYONE

DATA BASE

The data base package allows total user control over the contents of each entry in the file. Features user selectable record size from 5 to 242 characters per record, statistical and plotting package, output with WORDPRO files or printer. Includes full user definable output formatting. With optional indexing routine can produce a comprehensive index of a data set.

$299.95
Index 99.95

MAIL LIST

This powerful mailing list package features a variety of options for producing labels. It includes user defined file structure and label format. Label format can list to the printer or to WORDPRO format files.

$159.95

SOFTWARE LIBRARY

Hundreds of schools and individuals have purchased this package for use as an educational tool or just plain fun. It contains 50 (yes fifty!) programs. This ranges from our famous TREK 3 and horse race to fun learning programs for children to checkbook and a micro mail list program with lots in between. At about $1.40 per program how can you miss?

Cassette $69.95
Diskette 79.95
For APPLE II or PET

For PET or CBM 2000 or 8000 series with 32K memory please specify your machine configuration.

Charge to your MC/VISA






DR. DALEY'S SOFTWARE ✓34

425 Grove, Berrien Springs, Michigan 49103
Phone (616) 471-5514 Sunday-Thursday noon to 9 p.m. Eastern Time

MICROMAIL HAS WHAT YOUR SYSTEM NEEDS.



DIABLO 630

The Diablo Model 630 is a reliable, high quality, full-character serial printer for anyone who is seeking superior print quality at a low cost. This is the first Diablo printer to offer complete interchangeability between metal and plastic print wheels. And the sophisticated and discerning user does not sacrifice print quality to obtain this versatility. Every aspect of the Diablo 630 design has been focused on maintaining outstanding print quality. Terminals also have self-test, extensive internal diagnostics and automatic bidirectional printing.

$1,999.00

With Adjustable Forms Tractor add **$200.00**

TELEVIDEO 950

Before you buy any advanced video terminal, investigate the new TVI 950. Here's a partial list of features: complete editing (insert, delete, and erase), smooth scrolling, split screen with line lock, programmable function keys, 15 line-drawing graphics charcters, sharp 14 x 10 character resolution, 25th display line (for terminal status, function key labels, or messages from the host computer), buffered auxiliary port, up to four pages of memory (1 page standard), and baud rates to 19.2kB. For operator convenience there is a non-glare tiltable screen and a detachable keyboard. A built-in modem (300 baud, with keyboard dialing) is available for timesharing applications.

$995.00



TEXAS INSTRUMENTS

810/2 **$1,549.00**
(includes upper/lower case option)

810/2 VFC/CP **$1,679.00**
(includes u/l case, forms control & compressed print)

ANADEX DP-9500/9501

Standard features include expanded and compressed print, underlining, true lower-case descenders, RS-232C, Parallel, and 20mA interfaces, fast bi-directional printing, and high-resolution graphics.

$1,299.00

PRINTERS

ANADEX

DP 9000 **$1199**
DP-9001 **$1199**
Just like the 9500/9501, but 5 inches narrower. Uses paper up to 9.5 inches wide.

DIABLO

1640 RO **$2469**
Uses plastic daisywheels, prints up to 45 c.p.s.

1650 RO **$2799**
Uses metal daisywheels, prints up to 40 c.p.s.

NEC

High Quality, 55 c.p.s.

5510 **$2595**
Serial Interface

5530 **$2595**
Parallel Interface

C.R.T.'s

TeleVideo

912C **$ 699**
920C **$ 749**

SOROC

IQ120 **$ 689**
IQ140 **$1099**
IQ135 **$ 849**
NEW! Microprocessor controlled, programmable function keys.

C. ITOH

CIT 100 **$1625**
80 or 132 columns
Advanced Video Standard

DEC

VT-100 **$1650**

TELEPRINTERS

DEC

LA 34 **$ 969**
Dot-matrix, 30 c.p.i. Adjustable character sizes & line spacing.

LA 34 AA **$1099**
Includes programmable forms length control.

TELETYPE

43 **$ 999**
Very reliable 30 c.p.s. teleprinter. Ideal for use with 300-baud acoustic couplers or modems.

DIABLO

1640 KSR **$2699**
Uses plastic daisywheels, prints up to 45 c.p.s.

1650 KSR **$2799**
Uses metal daisywheels, prints up to 40 c.p.s.

NEC and **DIABLO** prices include forms tractor.

To Order: Send check to MICROMAIL, P.O. Box 3297, Santa Ana, CA 92703. Personal or company checks require two weeks to clear. Visa/MasterCard accepted. C.O.D. requires a 15% deposit. **Handling:** Add 3% to orders less than $750, 2% to orders $751 - $2,000, 1% to orders over $2,000. NOTE: Handling charges are waived on orders pre-paid in advance by check. **Shipping:** We ship FREIGHT COLLECT via UPS or Motor Freight. Air and Express delivery is available.

MICROMAIL™

P.O. Box 3297
Santa Ana, CA 92703
Phone: 714/731-4338
TWX: 910 595 1146

68

screen. Many things can be done by changing the display list, but this example demonstrates one of those possibilities.

Basically, if bit 7 of a display list instruction is set (1), then the computer will generate a nonmaskable interrupt for the 6502 when it encounters that display list instruction. If you place an interrupt routine that changes the color values in the color registers, the color on the screen will be changed each time a display list interrupt is encountered.

Another interesting feature of the Atari system is that assembly-language routines can be stored in a string variable and executed from BASIC: A=USR(ADR(S$)). This requires that the assembly-language routine be relocatable (contains no JMP or JSR instructions), since it might be moved around if the BASIC program is edited. However, you don't have to know where the routine resides, since you can get the starting address of any string with the ADR(. .) function. Some examples on using this technique are included in the manual appendix, along with some problems that could occur. This is a powerful feature if properly used.

Conclusions


The Atari Assembler Editor cartridge is a useful addition to the Atari line. The assembler is powerful and can do a great deal, but it is not a professional software development system. It is not well suited for development of large assembly-language programs.

Atari recommends the Assembler Editor be used for development of programs up to approximately ten percent of the total memory size of the system. Thus, you could easily generate a 2K assembly-language program on a 16K system. Programs larger than this can be developed by eliminating comments, using short labels or breaking programs into manageable pieces.

The Assembler Editor is well suited to meeting the average user's needs. It provides all of the necessary features plus several useful extras. The only addition I think might be of value is a linking relocator, which would let you move programs in memory and automatically fix JMP and JSR addresses. Without this feature, you have to fix them manually. Even so, the package is very nice and well documented.■

If you can't find the right program in our new catalog, it probably hasn't been written.

As the world's largest publisher of professional software for microcomputers, Lifeboat Associates offers the largest selection of state-of-the-art programs. And our new catalog has more to offer than ever. We also add the crucial dimension of after-sales service and full support to everything we sell. Order your free catalog today.



For a free catalog, mail coupon to Lifeboat Associates, 1651 Third Avenue, New York, NY 10028.
Or call (212) 860-0300. Telex 640693 (LBSOFT NYK)

CKM681

Name_____ Title_____

Company_____

Street_____

City_____ State_____ Zip_____

Our catalog contains full descriptions and specifications of the following:

DISK OPERATING SYSTEMS
CP/M CONFIGURED FOR:
- APPLE II
- DATAPOINT 1550/2150
- ICOM MICRO DISK
- ICOM 3712
- ICOM 3812
- ICOM 4511/PERTEC D3000
- INTEL MDS
- MICROPOLIS FLOPPY DISK
- MITS/ALTAIR
- MOSTEK MDX
- NORTH STAR
- OSI C3
- OSI C3B
- OSI C3C Prime
- TRS-80 MODEL II

MP/M FOR INTEL MDS

HARD DISK INTEGRATION MODULES
CORVUS WITH APPLE II SOFTCARD
CORVUS WITH S100 AND TRS-80 MODEL II
ICOM 4511/PERTEC D3000
KONAN PLUS CDC PHOENIX
XCOMP SM/S PLUS CDC PHOENIX
XCOMP DFC10 FOR PERTEC D3000

SYSTEMS TOOLS

BUG AND uBUG	SID
DESPOOL	TRS-80 MODEL II CP/M CUSTOMIZATION
DISILOG	UNLOCK
DISTEL	WORD-MASTER
EDIT	XASM-18
EDIT-80	XASM-48
FILETRAN	XASM-65
IBM/CPM	XASM-68
MAC	XMACRO-86
MACRO-80	ZDT
PASM	Z80 DEVELOPMENT PACKAGE
PLINK	ZSID
PMATE	
RAID	
RECLAIM	

TELECOMMUNICATIONS

BSTAM	BSTMS

LANGUAGES

ALGOL-80	muSIMP
APL/V80	NEVADA COBOL
BASIC-80 (COMPILER)	PASCAL/M
BASIC-80 (INTERPRETER)	PASCAL/MT
BDS C COMPILER	PASCAL/MT+
CBASIC-2	PASCAL/Z
CIS COBOL	PL/I-80
COBOL-80	S-BASIC
FORTRAN-80	TINY C
JRT PASCAL	TINY-C TWO
muLISP	W'SMITHS C COMPILER
	XYBASIC

LANGUAGE AND APPLICATIONS TOOLS

BASIC UTILITY DISK	MDBS.DRS
DATASTAR	MDBS.RTL
FABS	M/SORT FOR COBOL-80
FORMS 1 FOR CIS COBOL	PEARL
FORMS 2 FOR CIS COBOL	PSORT
MAGSAM III	QSORT
MAGSAM IV	STRING BIT
	STRING /80
	SUPER-SORT
	ULTRASORT II

WORD PROCESSING SYSTEMS AND AIDS

MAGIC WAND	TEX
LETTERIGHT	TEXTWRITER III
MICROSPELL	WORDSTAR
SPELLGUARD	WORDINDEX

DATA MANAGEMENT PACKAGES

CONDOR	MDBS
HDBS	MDBS.ORS

GENERAL PURPOSE APPLICATIONS

CBS	SELECTOR IV
SELECTOR III-C2	

MAIL LIST APPLICATIONS
MAILING ADDRESS (PTREE)
MAILMERGE FOR WORDSTAR
NAD
POSTMASTER

BUSINESS APPLICATIONS
ACCOUNTS PAYABLE (PTREE)
ACCOUNTS PAYABLE (SSG)
ACCOUNTS RECEIVABLE (PTREE)
ACCOUNTS RECEIVABLE (SSG)
GENERAL LEDGER II (CPAIDS)
GENERAL LEDGER (PTREE)
GENERAL LEDGER (SSG)
GLECTOR FOR SELECTOR III-C2
INVENTORY (PTREE)
INVENTORY (SSG)
PAYROLL (PTREE)
PAYROLL (SSG)

NUMERICAL PROBLEM-SOLVING TOOLS

ANALYST	STATPAK
FPL	T/MAKER
muMATH	

OTHER SPECIALIZED APPLICATIONS
DATEBOOK
ESQ-1
PAS-3 DENTAL
PAS-3 MEDICAL
PROPERTY MANAGEMENT (PTREE)

BOOKS AND PERIODICALS
APL—AN INTERACTIVE APPROACH
ACCOUNTS PAYABLE & ACCOUNTS RECEIVABLE-CBASIC
8080/Z80 ASSEMBLY LANGUAGE
THE CP/M HANDBOOK
THE C PROGRAMMING LANGUAGE
CRASH COURSE IN MICROCOMPUTERS
FIFTY BASIC EXERCISES
GENERAL LEDGER-CBASIC
INTRODUCTION TO PASCAL
LIFELINES
THE PASCAL HANDBOOK
PASCAL USER MANUAL AND REPORT
PAYROLL WITH COST ACCOUNTING-CBASIC
STRUCTURED MICROPROCESSOR PROGRAMMING
USING CP/M-A SELF-TEACHING GUIDE

ACCESSORIES
DC 300 DATA CARTRIDGE
HEAD CLEANING DISKETTE
FLIPPY DISK KIT
FLOPPY SAVER

Program names and computer names are generally trademarks or service marks of the author or manufacturing company.

All software products have specific requirements for hardware and additional associated software (e.g. operating system or language).

All products are subject to terms and conditions of sale.

Prices and specifications are subject to change without notice.

All Lifeboat software requires CP/M unless otherwise stated.

Copyright © 1981 Lifeboat Associates. No portion of this advertisement may be reproduced without prior permission.

ORDERING INFORMATION. COMPUTERS SUPPORTED INCLUDE:

ADDS Multivision	RT
AVL Eagle	RB
Altair 8800	B1
Altos	A1
Apple CP/M 13 Sector	RG
Apple CP/M 16 Sector	RR
BASF System 7100	RD
Blackhawk Micropolis Mod II	Q2
CDS Versatile 3B	Q1
CDS Versatile 4	Q2
Columbia Data Products	A1
COMPAL-80	O2
CSSN Backup	T1
Cromenco System 3	A1
Cromenco System 2 SDSS	R6
Cromenco System 2 DDSS	RX
Cromenco System 2 DDDS	RY
Datapoint 1550/2150 Single Sided	AA
Datapoint 1550/2150 Double Sided	AB
Delta Systems	A1
Digi-Log Microterm II	RD
Digital Microsystems	A1
Durango F-85	RL
Dynabyte DB8/2	R1
Dynabyte DB8/4	A1
Exidy Sorcerer + Lifeboat CP/M	Q2
Exidy Sorcerer + Exidy CP/M	RW
Heath H8 + H17/H27 disk	P4
Heath H89 + Lifeboat CP/M	P4
Heath H89 + Magnolia CP/M	P7
Heath H89 + Heath CP/M	P7
Helios II	B2
ICOM 2411 Micro Floppy	R3
ICOM 3712	A1
ICOM 3812	A1
ICOM 4511 5440 Cartridge CP/M 1.4	D1
ICOM 4511 5440 Cartridge CP/M 2.2	D2
IMS 5000	RA
IMS 8000	A1
IMSAI VDP-40	R4
IMSAI VDP-42	R4
IMSAI VDP-44	R5
IMSAI VDP-80	A1
ISC Intecolor 8063/8360/8963	A1
Intertec Superbrain DOS 0.1	R7
Intertec Superbrain DOS 0.5	RJ
Intertec Superbrain DOS 3.x	RK
Intertec Superbrain QD	RS
Kontron PSI-80	RF
MITS 3200-3202	B1
MSD 5.25 in	RC
Meca Delta-1 5.25 in.	P6
Micromation	A1
Micropolis Mod I	Q1
Micropolis Mod II	O2
Morrow Discus	A1
Mostek	A1
NEC PC-8001	RV
North Star Single Density	P1
North Star Double Density	P2
North Star Quad Density	P3
Nylac Micropolis Mod II	Q2
Ohio Scientific C3	A3
OKI IF-800	RZ
Onyx C8001	T2
Pertec PCC 2000	A1
Processor Technology Helios II	B2
Quay 500	RQ
Quay 520	RP
RAIR Single Density	R9
RAIR Double Density	RE
Research Machines 5.25 in.	RH
Research Machines 8 in.	A1
SD Systems 5.25 in.	R3
SD Systems 8 in.	A1
Sanco 7000 5.25 in.	RQ
Spacebyte	A1
TEI 5.25 in.	R3
TEI 8 in.	A1
TIP	T3
TRS-80 Model I STANDARD	R2
TRS-80 Model I + FEC Freedom	RN
TRS-80 Model I + Micromation	A4
TRS-80 Model I + Omikron 5.25 in.	RM
TRS-80 Model I + Omikron 8 in.	A1
TRS-80 Model I + Shuffleboard 8 in.	A1
TRS-80 Model II	A1
TRS-80 Model III	RU
Vector MZ	Q2
Vector System 2800	A1
Vector System B	Q2
Vector VIP	Q2
Vista V-80 5.25 in. Single Density	R8
Vista V200 5.25 in. Double Density	P6
Zenith Z89 + Zenith CP/M	P7
Zenith Z89 + Lifeboat CP/M	P4
Zenith Z89 + Magnolia CP/M	P7

SS = single sided SD = single density
DD = double sided DD = double density

The list of available formats is subject to change without notice. In case of uncertainty, call to confirm the format code for any particular equipment.

LIFEBOAT WORLDWIDE

Lifeboat Inc.
3-23-8 Nishi-shinbashi
Minato-ku, Tokyo, 105 Japan
Tel: 03-437-3901
Telex: 2422723 (ASRTYOJ)

Lifeboat Associates, Ltd.
PO Box 125
London WC2H 9LU, England
Tel: 01-836-9028
Telex: 893709 (LBSOFTG)

Lifeboat Associates GmbH
PO Box 168, Aegeristrasse 35
CH 6340 Baar, Switzerland
Tel: 042-31-2931
Telex: 865265 (MICO CH)

Intersoft GmbH
Schlossgartenweg 5
D-8045 Ismaning, W. Germany
Tel: 089-966-444
Telex: 5213643 (ISOFD)

Lifeboat Associates, SARL
10, Grande Rue Charles de Gaulle
92600 Asnieres, France
Tel: 1-733-08-04
Telex: 250303 (PUBLIC X PARIS)

Lifeboat Associates

Software with full support.

✓312

✓See List of Advertisers on page 194

Shift into Extra Drive On Your Heath

By Kirk L. Thompson

The H-77 floppy drive, Heath's newest eight-bit computer accessory, will greatly enhance your H-89 or—after modification—H-88.

A single drive is surprisingly limited when running sophisticated programs, and the additional drives will make data storage and debugging much easier. The added storage abilities become particularly obvious when you consider that a newly SYSGENed disk is half-filled with system files. Although many of these can be eliminated, the most you can gain back is half what you initially lost. The extra drives let you run a SYSGENed disk in SY0: and initialized-only disks in the others, for 94K (368 sectors) of storage each. The remaining 8K (32 sectors) are needed for the disk directory, label and other miscellaneous bookkeeping.

Assembly

I had anticipated that assembly would be easy compared with the H-89, and that proved to be the case. As is usual with Heath, the parts came packed in a carton, with the builder responsible for their organization. This kit was not too complicated, so organizing the small parts, after taking inventory, was easy. Many of them, especially the hardware pieces, were packed in labelled envelopes. The carton also contained parts for modifying the H-89. There were a few errata for the main construction manual, though nothing like those for the H-89.

Assembly took me about six hours. Most of that time was spent wiring the power supply and completing the mechanical assembly. The Siemens/Wangco Model 82 drives that Heath uses come assembled and tested. Photo 1 shows the completed power supply for the H-77.

The printed circuit board was simple and Heath's instructions were clear. I had two minor problems with the ac bracket, which is hidden behind the cover to the right in the photo. The solid wire supplied was easily nicked, and one broke after I had wired one of the line voltage selector switches. Use wire strippers, and be careful!

The other problem arose from the tight quarters Heath calls for when soldering to those same switches after the ac bracket has been fastened to the chassis (p. 18 in the assembly manual). I recommend just starting the sheet-metal screws into the bracket, so that it can be tilted away from the chassis to allow access.

Use a volt-ohmmeter after completing the power supply to ensure that it is working properly. The same applies if you modify it; I recently received another errata sheet detailing rewiring of part of the supply.

After finishing the power supply, I did the mechanical assembly. Photo 2 shows the completed kit, without the cover. You can see the Wangco drive on the right. Behind it, occupying the space for the second drive, is a plastic open-front box for storing diskettes, which came with the kit. The second drive may be added at any time and simply plugged in. The interface ribbon cable came assembled. Photo 3 shows the completed H-77. Except for the bezel, the cabinet is heavy sheet metal.

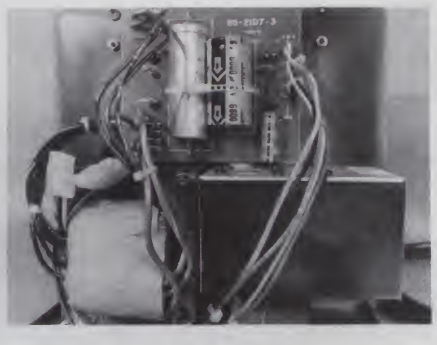


Photo 1. The H-77's power supply.

Modifications

After the kit is finished, the H-89 must be modified. I'll describe what I did first, and then talk about the H-88. The modification kit includes the preassembled adapter ribbon cable and items to insulate its route. Photo 4 shows the completed modification.

The adapter cable runs out through the gap between the two halves of the cabinet shell, between the rear hinges. However, I strongly recommend that you use additional cardboard insulators, as shown in Photo 5.

Insulator 1 is inserted between the adapter cable and the stepper motor of the drive in the H-89 cabinet. The stepper motor will get very warm with extended use. Insulator 2 goes between the cable and the power supply heat sink on the right in the photo.

For the H-88, there are two drive options. You can either use the H-77 as your only (preferably dual) drive unit, or, if you anticipate the need for the three drives now allowed under the newest version of HDOS, you can add a drive to the H-88 cabinet as well. The former is probably a good idea; the H-89 is pretty cramped inside.

In either case, you'll need the

Address correspondence to Kirk L. Thompson, 1817 C St., Iowa City, IA 52240.

H-88-4 drive kit, which includes the interface board that plugs into the microprocessor-board backplane beside your cassette and serial input/output boards. Adding that interface board effectively converts the H-88 to an H-89.

With the modification complete, it is now just a matter of positioning the H-77 and connecting the cables. They are polarized. When I ordered, I was afraid that the interface cable might be too short for my installation, but it wasn't. The cable of the H-77 extends four feet out the rear, and, depending on how you route the adapter cable, there is about a foot extending from the rear of the H-89. Photo 6 shows my system on the stand I kludged together for it. The interface cable is visible, draped over the rear of the upper shelf and falling down behind the H-89.

Testing

During construction of the H-77, you perform the drive speed test on the drive to ensure that it is within specification. When the kit is complete, the general checkout and seek-time tests must be run. These are described in detail in the HDOS manual, but I will make a few remarks about them here.

The general checkout test is a rather lengthy read/write test. You'll need to use a floppy with no bad sectors; I have not had a problem with any of the diskettes I've ordered from Heath. Since this test takes about half an hour to run, it is a good time to review the HDOS manual, particularly p. 14f of chapter one if you have only used one drive before. I'll explain why shortly.

The second test to run is for seek or step time between tracks of the hard-sectored floppy that Heath uses. They guarantee the drives for a minimum seek time of 30 ms. This test varies the seek time from 36 ms downward, in increments of two ms, to where stepping becomes unreliable.



Photo 2. The single-drive unit without cover.

On my H-77, I could actually hear it chattering during the last seek time tested. Both of my drives, the H-77 and the one in the H-89, step reliably well-below Heath's guaranteed minimum. The H-89 went down to 12 ms and the H-77 to 14 ms. To allow some safety margin, I have set system seek time to 16 ms using the SET SY: STEP n command.

Once I had decided on the system seek time, I removed the write-protect tab from my system volume copy and entered the SET command. In this way, any new floppies that I prepare for use will have the seek time already set. The disks I was already using, of course, had to be changed individually.

Operation

First, a warning. The power for the H-77 must be on before booting the H-89. Heath warns that the result of booting up with the H-77 off will be unreliable, because the I/O cable to the H-77 is unterminated without power to the drive. I thought I could develop the habit of turning them both on before use, but I forgot once.

This is what happened. While trying to boot up the system drive in H-89, I received the error message

?00 DISK READ ERROR DURING BOOT.

I reset the H-89 and tried again, but got the same thing. Then I realized that the H-77 was off, so I pushed on the rocker switch in back, reset the H-89 again and tried a third time. I got the same error message.

While booting, I had destroyed part of an HDOS file required for that operation. Note, though, that a write-protected disk, such as a system volume copy, will neither boot nor even generate an error message under these circumstances. Also note that it makes no difference whether the H-77 is on or off when loading from cassette.

Luckily, I had the nonsystem files on the partially destroyed disk in another location. I ended up recovering the disk by reinitializing (erasing its contents) and reSYSGENing it. If I hadn't had the files someplace else, I could have recovered them using the copy command between drives, or, if the H-77 were my only drive, one-copying (:OC:*.*). But copying between drives will not duplicate files flagged "S"; the flags have to be cleared first. I have installed a switched outlet strip which powers up both H-77 and H-89 simultaneously, to prevent the above situation from happening again.

Assuming, now, that both of them are on, you can boot up the system drive (SY0:). If you plan to use the second drive, you must inform the operating system by inserting a disk into it and typing MOUNT SY1:. This is where I confronted my most seri-



Photo 3. The completed single-drive kit with disk-storage box on the right.

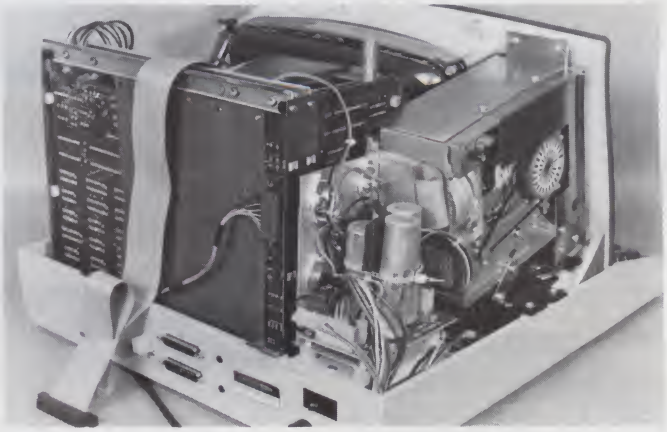


Photo 4. The modification of the H-89.

ous problem, while familiarizing myself with the H-77. (I had not reviewed the HDOS manual during the general checkout, as I recommend that you do.)

I was trying to run a Microsoft HDOS BASIC (MBASIC) program and use the new drive for data storage. But I kept getting a "?02 UNKNOWN UNIT FOR THIS DEVICE" error message! After much grief, I broke down and read the instructions.

I recently ran into another problem. I had booted up the minifloppy containing the program I use as a database system in SY0: and proceeded to MOUNT SY1:, but got a "?02 UNABLE TO READ THIS DISK. IT PROBABLY HAS NOT BEEN PROPERLY INITIALIZED" error message on an unSYSGENed disk that worked fine last time I used it. I tried other disks in the same operation, with the same result, and the STAT command showed one hard error and lots of soft ones.

On impulse, I dismounted all disks, shut down the system, and unplugged and reconnected the H-77's ribbon cable from the adaptor cable of the H-89, on the chance that a dirty contact was the problem. That did it! When I restarted the system with the same two initial disks, the MOUNT command worked and STAT showed no errors.

Since then I have had no problems with the H-77, or with the H-89. I have had some trouble with Heath's Extended Benton Harbor BASIC, but only because the first program I wrote required too many nested FOR-NEXT loops; converting to MBASIC solved that. I have also had some problems with one of the Heath Users Group's programs, but once again, it was my fault. I managed to mix the BASIC interpreter from HDOS version 1.5 with the version 1.6 operating system—the two are not compatible.■

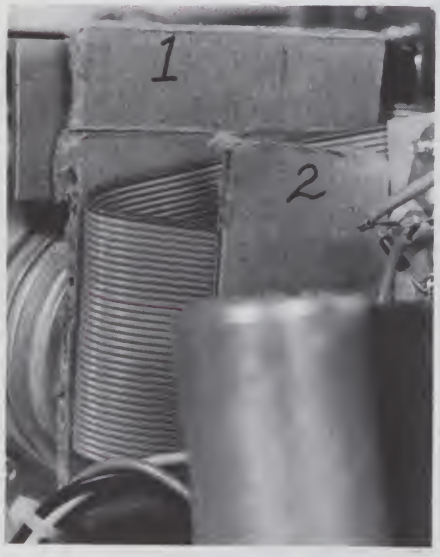


Photo 5. The suggested additional cable insulators (see text).



Photo 6. My system includes the cassette software. The lettering on the drives and file boxes is of the self-sticking vinyl variety.

APPLE II+ 48K RAM $1199.00

ATARI 400 16K RAM $399.00 *(Basic cartridge not included)

APPLE PRODUCTS	LIST	OUR PRICE
Apple II + 48K	$1530	$1199.
Apple Disk w/cont	$645	$549.
Apple Disk w/o cont	$525	$469.
Apple Pascal System	$495	$399.
Apple Integer Card	$200	$159.
Apple Centronics Card	$225	$189.
Apple H.S. Serial Card	$195	$159.
Apple Silentype Printer	$595	$529.
Apple Fortran	$200	$169.
Apple Pilot	$150	$125.
Apple Writer	$75	$60.
DOS Tool Kit	$75	$60.
Apple Plot	$70	$58.
Microsoft 280 Softcard	$349	$299.
Microsoft 16K Ram Board	$195	$179.
Microsoft Fortran	$195	$179.
Buy All 3 Microsoft Prods	$739	$629.

ATARI PRODUCTS	LIST	OUR PRICE
Atari 400 16K	$499.95	$399.
Atari Basic Cartridge	$59.95	$47.95
Atari 800 16K	$1080.00	$799.
Atari 410 Recorder	$89.95	$69.
Atari 810 Disk Drive	$599.95	$499.
Atari 850 Interface	$219.95	$189.
Ram Cram 32K Board	$399.00	$199.
Atari 16 K Ram	$199.95	$159.

APPLE HAM PROGRAMS
CW RTTY ASCII TRANSCEIVE PROGRAM
Cassette $19.95 Diskette $29.95
Slow Scan television program $19.95

SPECIALS

Andromeda 16K Ram Card	$159.00
Visicalc	$119.00
Desktop Plan	$75.00
DB Master	$159.00

APPLE III 128K RAM-SANYO 12 in. MONITOR $3995
And Information Analyst Package

C. ITOH FP1500-25 Letter Quality Printer	$1595.00
IDS Paper Tiger 460-G Printer	$1129.00
Okidata Microline 80 Printer	$495.00
Epson MX-70 Printer	$399.00
EPSON MX-80 Printer	$489.00
HI-RES Software for EPSON MX-80	$ 39.95
TYMAC PPC-100 Parallel Printer Card w/Cable	$ 99.00

SOFTWARE FOR APPLE

BPI General Ledger	$350.00
BPI Accounts Receivable	$350.00
BPI Inventory	$350.00
Stockpile Inventory Sys.	$395.00
Easywriter Professional	$195.00
LJK Wordprocessor 80 Col.	$149.00

ATARI 400 DISC SYSTEM
Atari 16K Computer 810 Disc Drive & Basic Cartridge **$898.**

Sanyo 9 In B & W Monitor	$179.00
Sanyo 12" B & W Monitor	$249.00
Sanyo 13" Color Monitor	$429.00
NEC 12" Green Phosper Monitor	$259.00
CCS 7710A Serial Interface	$149.00
Hayes Micromoden II	$319.00
MNT Comp AID & DIA Board	$299.00
MNT Comp Romplus Board	$179.00
MNT Comp Introl X/10 Sys	$289.00

OLENSKY BROS., INC.
COMPUTER SALES DIVISION
3763 AIRPORT BLVD. • MOBILE, ALA. 36608
(205) 344-7448 • CST 9-6
130

computer case company

comp case



• AP103

• AP101	Apple II with Single Disk Drive	$109
• AP102	Apple II with Double Disk Drives	119
• AP103	Apple II, 9 Inch Monitor & Double Drives	129
• AP104	Apple ///, two additional Drives & Silentype	139
• AP105	12 inch monitor plus accessories	99
• RS201	TRS-80 Model I, Expansion Unit & Drives	109
• RS202	TRS-80 Monitor or TV set	84
• RS204	TRS-80 Model III	129
• RS205	Radio Shack Color Computer	89
• P401	Paper Tiger 440/445/460	99
• P402	Centronics 730/737 - Line Printer II/IV	89
• P403	Epson MX70 or MX80	89
• CC90	Matching Attaché Case	75

computer case company 320
5650 INDIAN MOUND CT. COLUMBUS, OHIO 43213 (614) 868-9464

NEVER UNDER$OLD.

Thats right. If you can find a lower price in this magazine WE WILL BEAT IT! Period.*

S-100 HARDWARE

SD SYSTEMS
- Versa Floppy I kit $259
- Versa Floppy II kit $349
- ExpandoRam II kit $249

ITHICA INTERSYSTEMS . . . $CALL
ALTOS . . . . . $CALL
NORTHSTAR . . . . . $CALL

SUPPLIES

Verbatim Datalife Diskettes
MD525-01,10,16 . . . . . $26.50
FD34-9000 . . . . . $30.00
FD34-8000 . . . . . $44.00

Avery Tabulables
5,000 3½ X 15/16 . . . . . $18.75
3,000 3½ X 15/16 . . . . . $14.25
1,000 3½ X 15/16 . . . . . $8.15

UARCO Paper (prices are FOB S.P.)
9½ X 11, 15 or 18 Lb. . . . $25.95
14 7/8 X 11, 15 or 18 Lb. . $35.00

SOFTWARE

Microsoft Basic-80 . . . . . $299
Microsoft Basic Compiler . . . $319
Microsoft Fortran-80 . . . . . $399
Magic Wand $275
Apple Visicalc $113
Pickles and Trout CP/M® . . . $175

APPLE HARDWARE

Microsoft Z-80 Softcard . $259
Microsoft Ramcard $170
SSM AIO A&T $165
SYMTEC Apple Light Pen . $219
MOUNTAIN HARDWARE:
- Super Talker $270
- ROMWRITER $157
- INTROL/X-10 . . . . . $180
- ROMPLUS + ... $162
- MUSICSYSTEM $499
- Apple Clock $252

Lobo Drive . . . . . $CALL
Videx 80 x 24 . . . . . $299
Andromeda $170
M & R Sup-R-Term $299
Enhancer $100
NEC Green Monitor $240
Sanyo Green Monitor . . . $240
D.C. Hayes Micromodem . $299
CALIFORNIA COMPUTER SYSTEMS
See our full page ad in this magazine.

PRINTERS

EPSON MX-80 . . . . . CALL
MX-80 Graphics ROM . . . CALL
NEW EPSON MX-80 TF . . CALL
Okidata Microline 80 . . . $415
Okidata Microline 82 . . . $625
Okidata Microline 83 . . . $899
IDS Paper Tiger 460G . . $1050
Anadex DP-9000,1 . . . . $1195
Anadex DP-9500,1 . . . . $1295
Centronics 737 . . . . . $689
NEC Spinwriter . . . . . $CALL
NEC w/ Sellum Option . . $CALL
C. Itoh Starwriter 25 cps $1440
C. Itoh Starwriter 45 cps $1770
Diablo 630 . . . . . $2195
Malibu 165 . . . . . $1995
Malibu 200 . . . . . $CALL
MPI 88G $495

TRS-80 HARDWARE

TRS-80's . . . . . $CALL
Micropolis 77 track $399
Percom Doubler $199
Percom Separator $27
Orchestra 80 . . . . . $79

ALPHA BYTE STORES 311

5115 Douglas Fir Road • Suite B • Calabasas, CA 91302

***Include $2.00 shipping and handling on all orders. Visa and Master Card accepted. Never undersold offer applies only to items currently deliverable from other retail vendors at advertised price. All never undersold offers good as supply lasts. Please add $2.00 for all COD orders. Please call for items not listed. We gladly answer any questions on all of our hardware, software, and supply needs. Quantity discounts available. School purchase orders accepted. Please remember to figure competitors shipping and handling charges when arriving at never undersold price.**

(213) 883-8594



And the Winner Is . . .


Here are the results of Microcomputing's first annual graphics contest.

The ballots have been cast, the votes have been counted, and the winner is . . .

Selecting the winners from among the entries in *Kilobaud Microcomputing*'s first annual graphics contest was indeed a difficult task. While some of the entries were produced on advanced microcomputer equipment and peripherals, other entries relied more on the skill and imagination of the programmer. The following pages show the winners and some of the more interesting entries which display the range of complexity in micrographics that can be achieved.

We extend our congratulations to the winners, and our appreciation to all who entered the contest. Thanks to you our first annual contest was a success. Let's do it again next year.

Those who failed to submit entries this year, but feel that they could have done better, will get a change to strut their stuff next year during the magazine's second annual graphics contest.

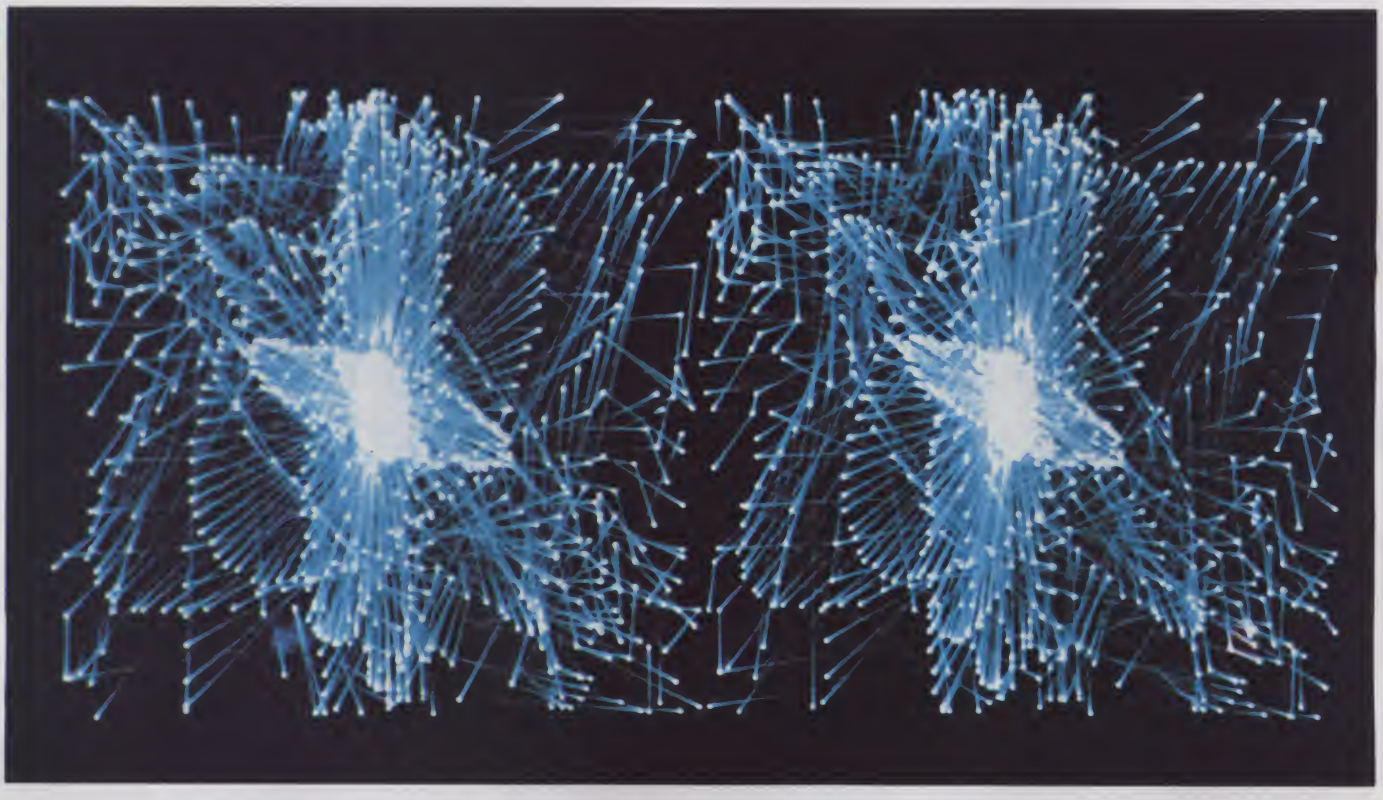


The Twins

Black & White Video

Produced with a home-brew 6800-based system on a modified television screen. *Second.*

Larry Abel
91 Forrest Ave.
Fairfax, CA 94930

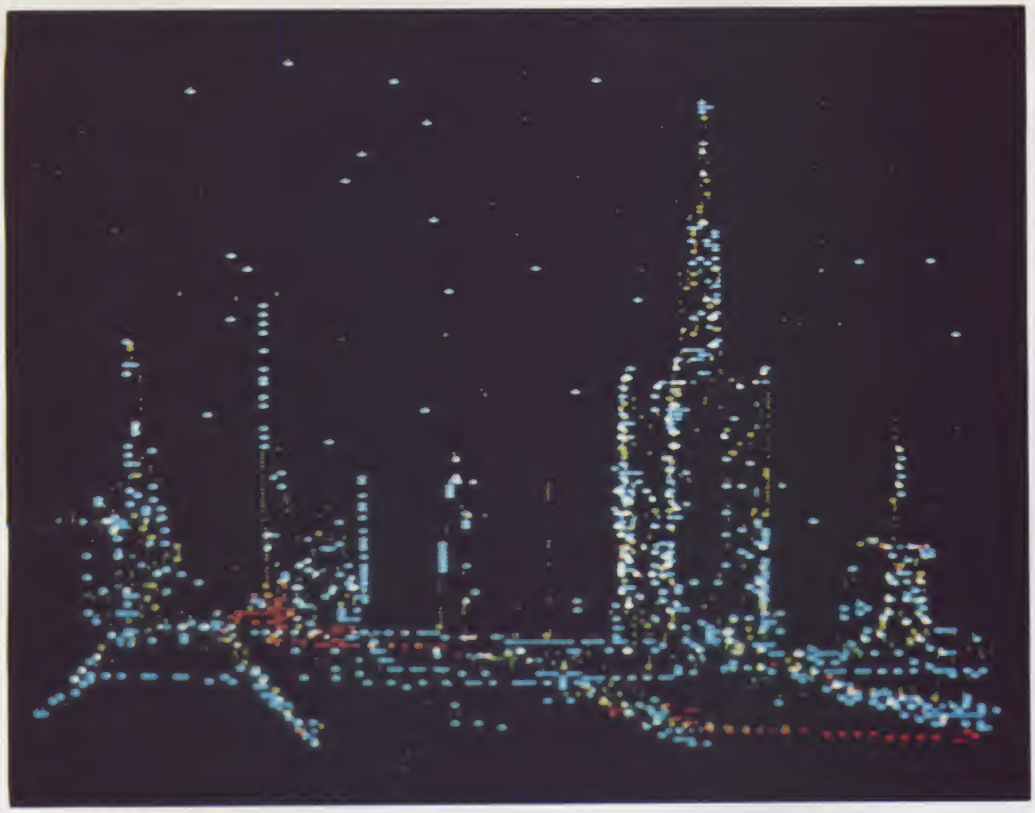


Night View

Color Video

Composed with VersaWriter on a 48K Apple II microcomputer, and displayed on an RCA Colortrac screen.

Ben Lanterman
12162 Haldane Court
Bridgeton, MO 63044

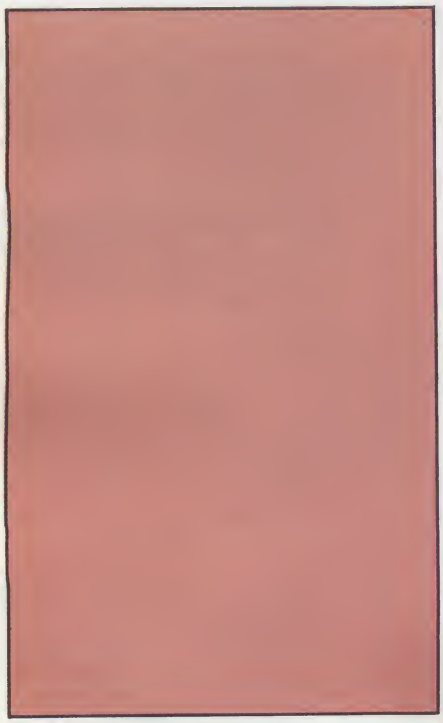



Helix Surface 3

Plotter Hard Copy

Produced on a Terak 8510A microcomputer and Hewlett-Packard 7225A plotter.

Mel Cobb
1520 Ward Ave., #503
Honolulu, HI 96822

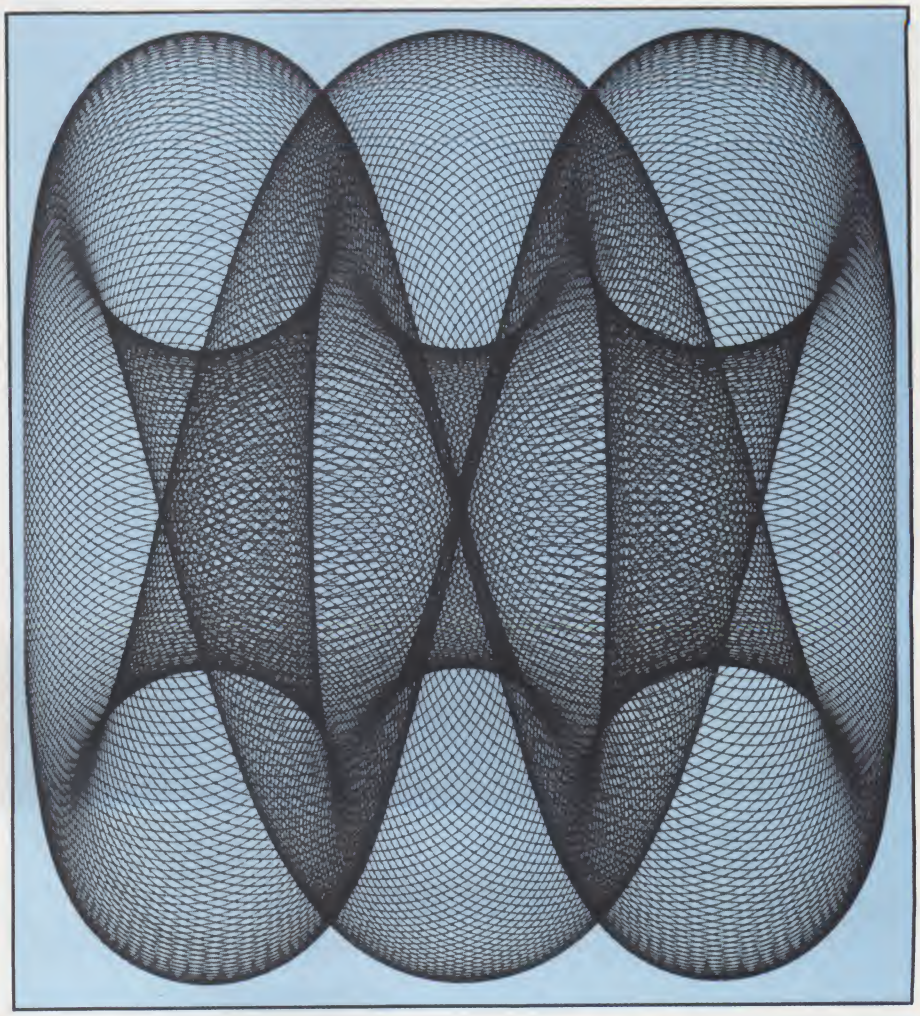

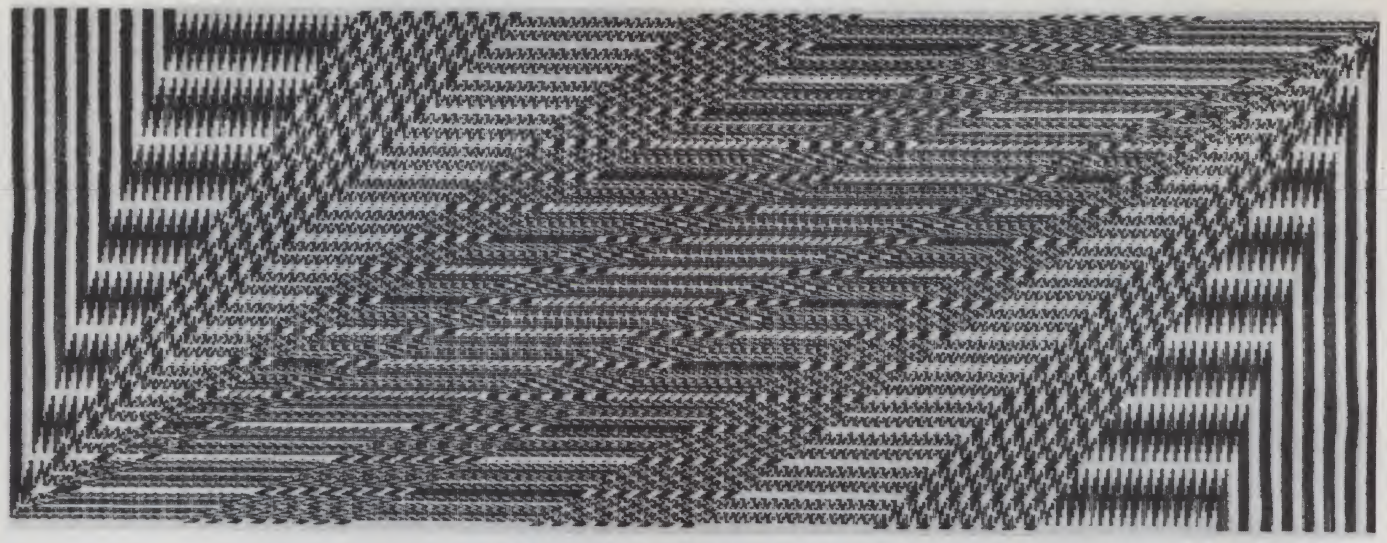


Houndstooth Variation 2

Printer Hard Copy

Created on a CCS 2210 microcomputer and MicroAngelo video board, and produced by an Axiom 820 printer. *Second.*

Mel Cobb
1520 Ward Ave., #503
Honolulu, HI 96822

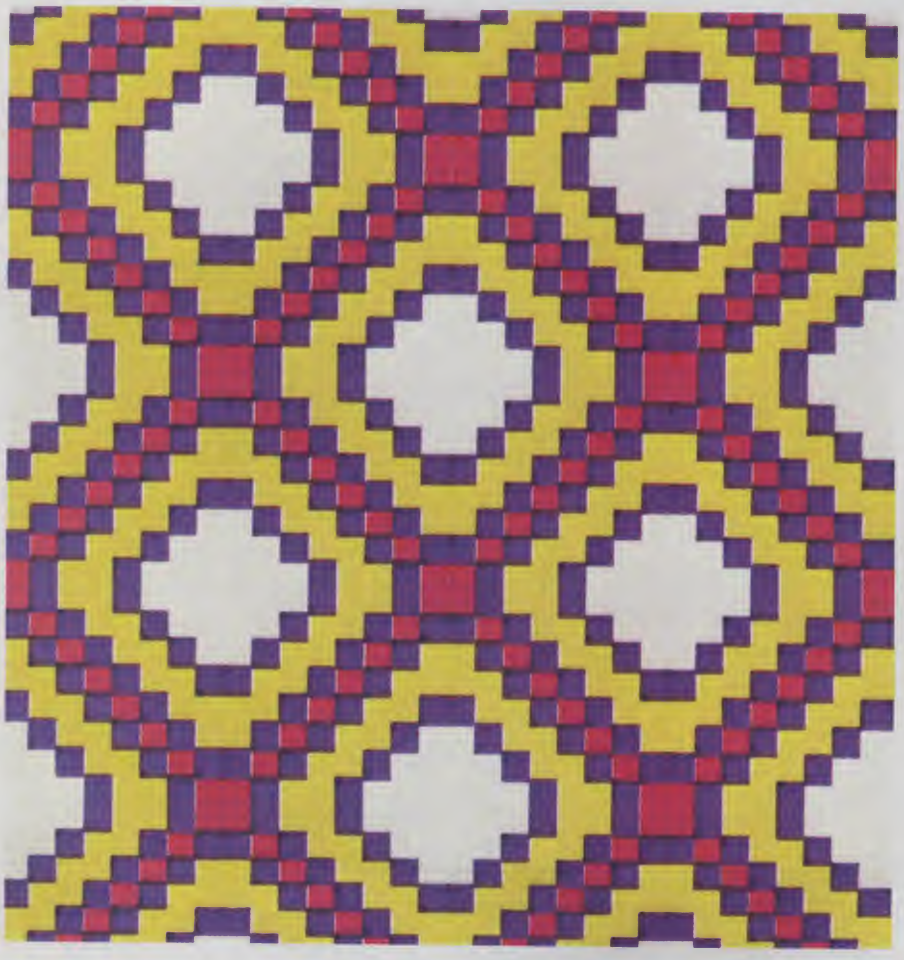


Design 12 in 3 Colors

Plotter Hard Copy

Produced on a 48K TRS-80 Model I and a Watanabe WX4671 plotter. *Third.*

William Shotts, Jr.
Box 143
Sandy Springs, MD 20860

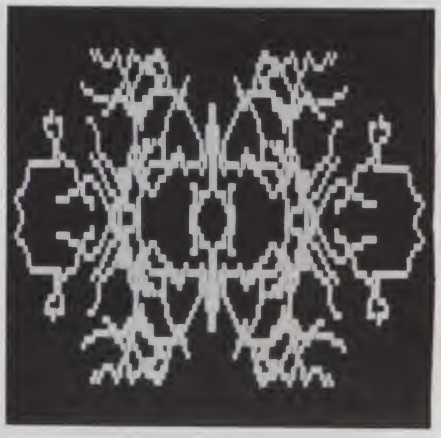

Designs

Black & White Video

A video display produced from TRS-80 Model I Level II output.

Alan Hensel
RD #1, Box 184-A
Cranbury, NJ 08512

What has nine lives, three forms, multiple faces and a price tag that almost disappears?



The Magical Microline 80 Printer

It's magic! Well, almost. The Microline 80 will run all day at 80 cps with no duty cycle limitations. The head is warranted for 200,000,000 characters. That translates to over nine years on your TRS-80,™ APPLE® or other small computer.

Want to change forms? The magical Microline 80 is three printers disguised as one. There is a whisper-quiet rubber platen for cut sheets and roll paper, pins on nine inch centers for pin feed stock and optional snap-on tractors that adjust to suit all your other forms. The Microline 80 also saves paper by letting you tear off as close as one inch from the last print line.

Want to change your image? The magical Microline 80 really does tricks. It prints upper and lower case, condensed and double width characters *and* block graphics for charts, graphs and diagrams.


The Microline 80 is not a toy. With two motors, a rugged cast aluminum base and a head you never have to throw away, the Microline 80 is built to handle the most demanding business *applications*.

Which brings us to the biggest magic of all, the price tag, the one that almost disappears. If we're not the lowest, we are so close that it doesn't matter. There are stocking Microline distributors throughout the country. Call or write today for the name of the one near you and the price of the Magical Microline 80.

OKIDATA

Okidata Corporation, 111 Gaither Drive, Mount Laurel, New Jersey 08054 609-235-2600


Okidata is a subsidiary of Oki Electric Industry Company, Ltd.

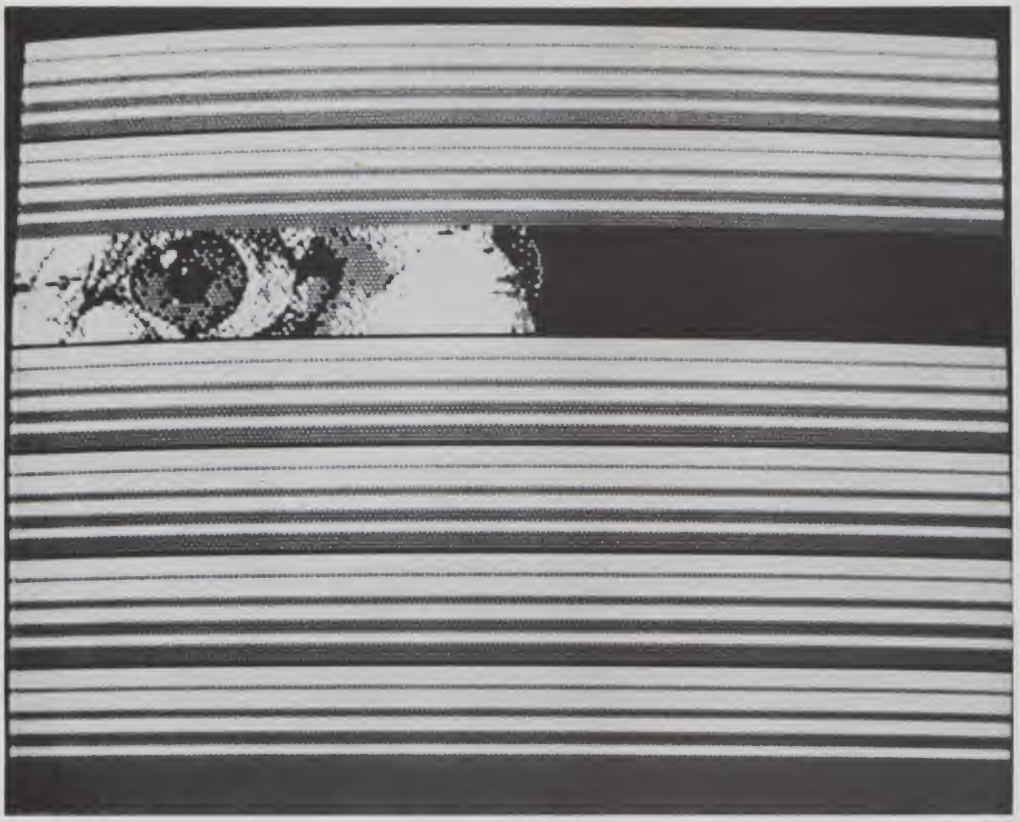

Icy Freeway
Black & White Video

Produced on a TRS-80 Model I with EDTASM and a GRAFIX80 high resolution graphics board, using Programma International's Create program, by Ted Carter. *First.*


Theadore D. Warnell
2511 15A St., S.W.
Calgary, Alberta T2T 4B8
Canada

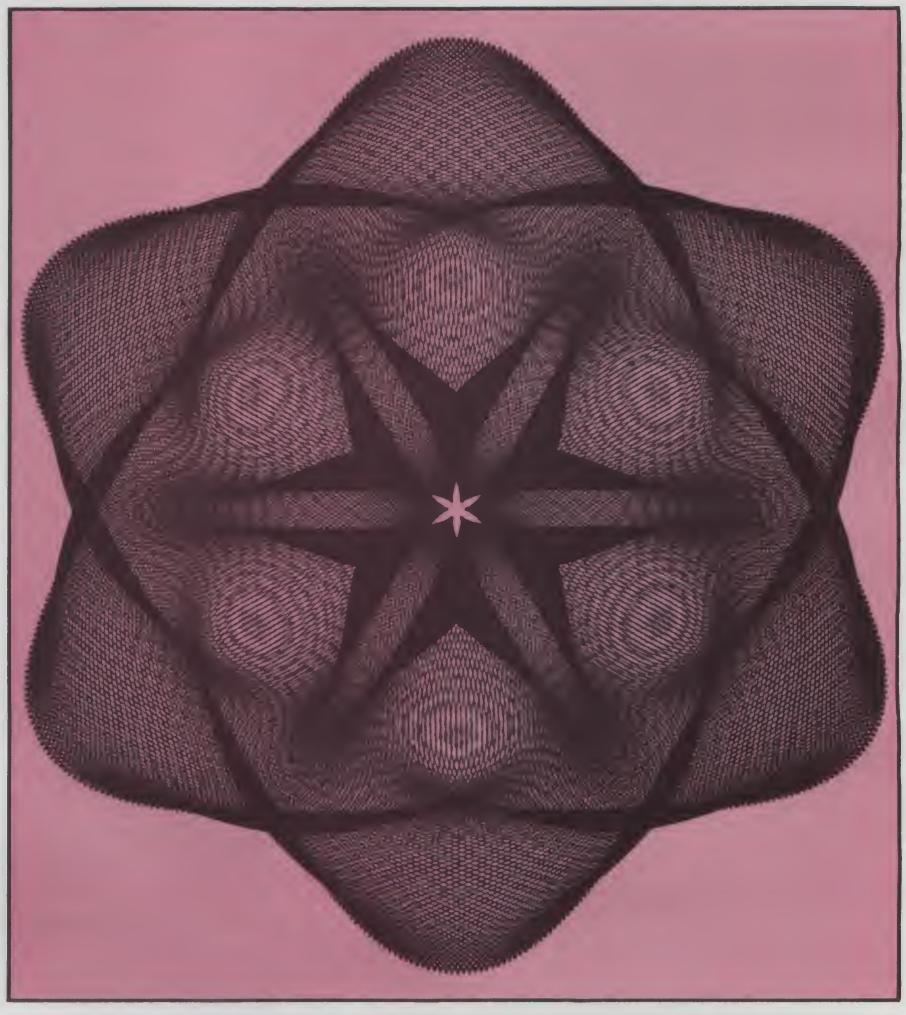



Rosette Variation 6
Plotter Hard Copy


Produced on a Terak 8510A microcomputer and Hewlett-Packard 7225A plotter, using UCSD Pascal. *First.*

Mel Cobb
1520 Ward Ave., #503
Honolulu, HI 96822

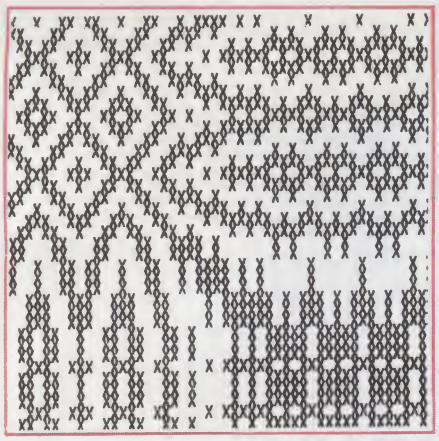

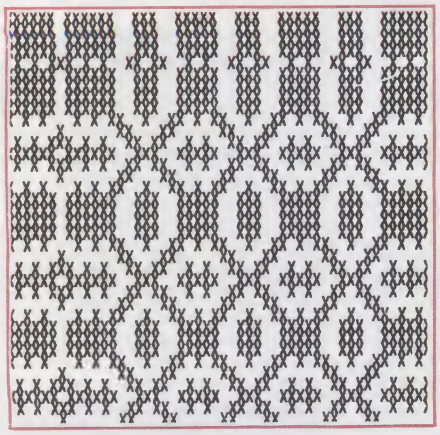

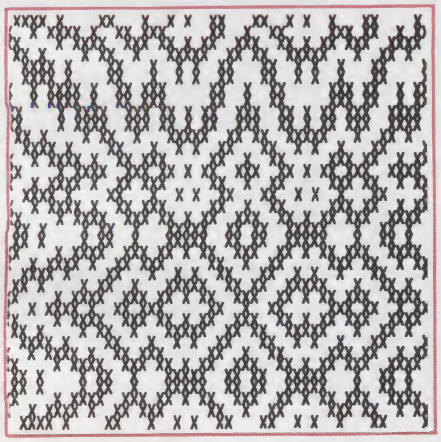

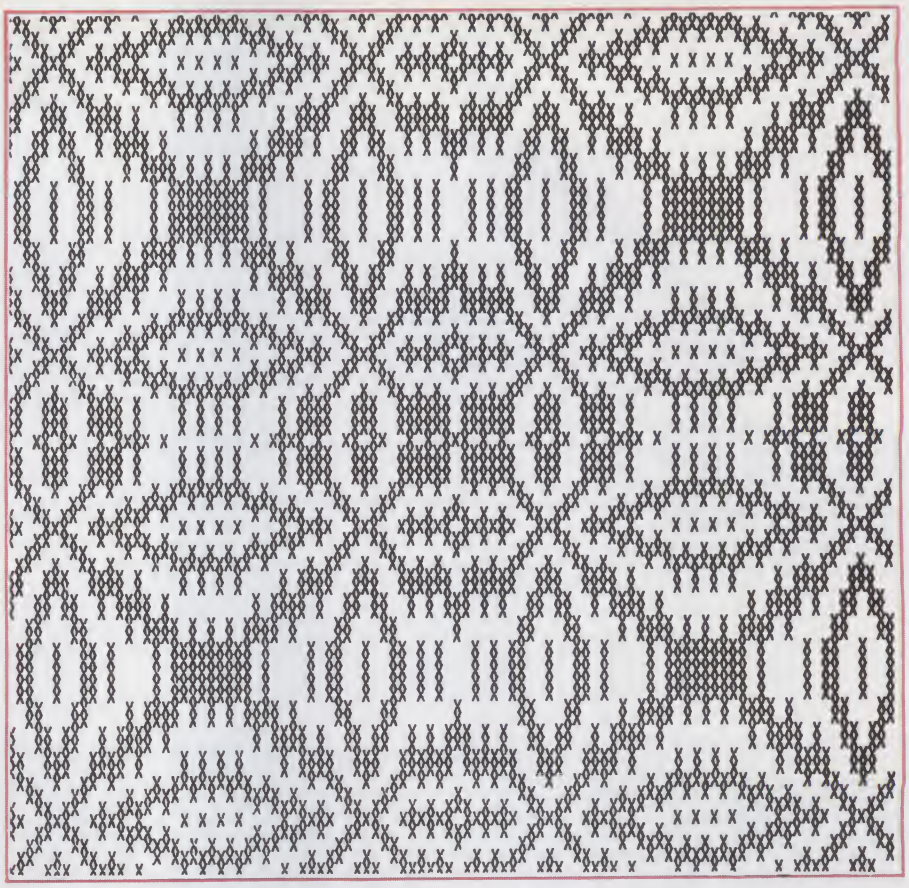

Handweavers Graphic Patterns


Printer Hard Copy

Produced with an SWTP 6809 microcomputer and DecWriter LA34 printer. The pattern derives from a warp and weft draft in *A Handweaver's Pattern Book* by Marguerite Porter Davison. *First.*

Laird D. Schearer
207 Lovers Lane
Rolla, MO 65401





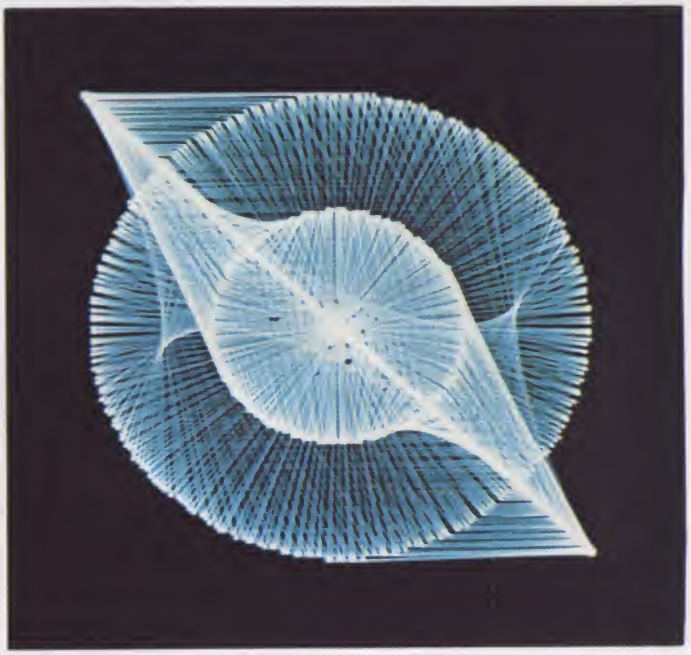


Fibers

Black & White Video

Created on a home-brew 6800-based 8K system. The vector-type video display is made from a television with its deflection coils driven by a home-brew current driver.

Larry Abel
91 Forrest Ave.
Fairfax, CA 94930

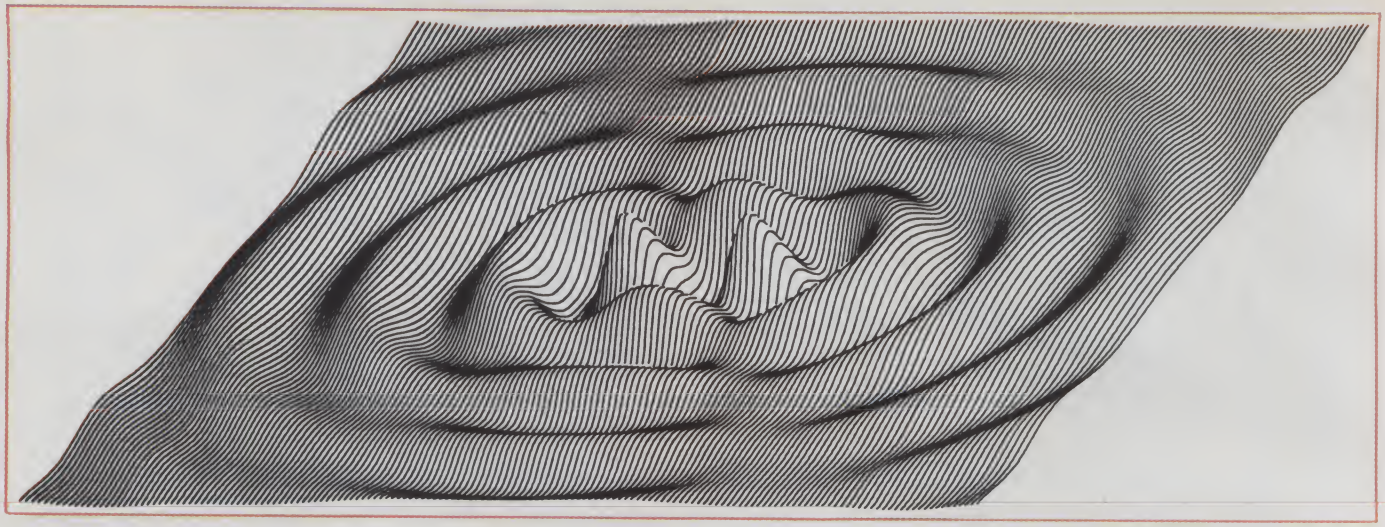


Interference Patterns

Plotter Hard Copy

Produced on an 8080 microprocessor-controlled Wang 2272 drum plotter. The plotter was driven by a privately-modified Wang OIS workstation. *Second.*

Larry Hamilton
PO Box 2013
Lowell, MA 01851

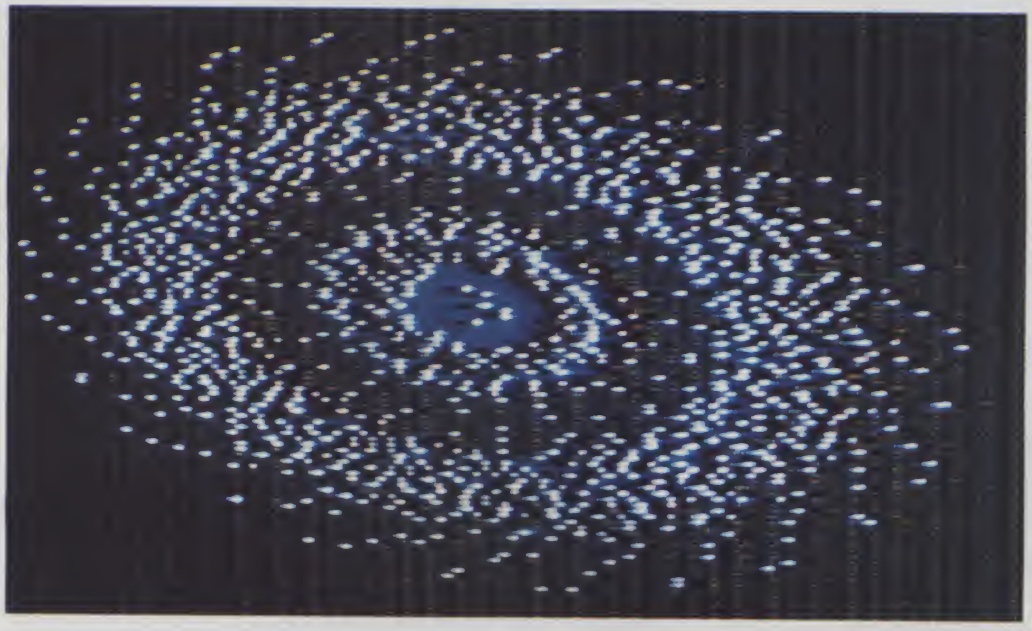



Galaxy

Color Video

Created on an SWTP 6809 microcomputer with Percom's Electric Crayon. This is one frame of a real-time animation program. *Second.*

Ted Wolff
579 W. 215th St.
New York, NY 10034

GIMIX & MICROWARE present the 6809 PROFESSIONAL TOOLBOX

A **GIMIX** 56KB static RAM 2Mhz 6809 Dual Drive Mainframe System with **MICROWARE's** Multiuser OS9 Pro-Package --special combination price **$3968.09.** This system includes the **GIMIX** Mainframe with 30 amp C.V. ferro-resonant power supply, SS50/50C Motherboard, 2Mhz 6809 CPU with time of day clock and battery back-up, 6840 programmable timer, 2 serial ports, 56K Bytes of Static RAM, and two 5¼'' disk drives and double density controller installed in the **GIMIX** Mainframe with the same brownout protection and power supply reliability that **GIMIX** is famous for.

MICROWARE's OS9 Pro-Package includes OS9 Level 1, the BASIC09 interactive compiler, Macro Text Editor, Interactive Assembler, and Interactive Debugger which gives you the necessary tools for efficient structured software development.

All **GIMIX** Boards have gold plated bus connectors, and are burned in and 100% tested before shipping.

And this system is expandable. You can add memory, I/Os, video or graphics cards, Arithmetic processors, additional drive capacity, and other hardware now or in the future to this SS50 bus structured system from **GIMIX** or other SS50 bus compatible manufacturers. **MICROWARE** has other OS9 software such as the Stylograph Screen-Oriented Word Processor available now, and in the future will be announcing other languages and utilities that run under OS9. And coming soon from **MICROWARE** will be OS9 Level 2 that lets you address up to 1 megabyte of memory.

GIMIX & GHOST are trademarks of GIMIX Inc., Basic 09, OS9 and Microware are trademarks of Motorola and Microware Inc.

For further info on the best in 6809 Hardware, contact



GIMIX INC. ✓22
The Company that delivers Quality Electronic products since 1975.
1337 WEST 37th PLACE, CHICAGO, IL 60609
(312) 927-5510 • TWX 910-221-4055

For further info on the best in 6809 Software, contact.



MICROWARE
Microware Systems Corp.
5835 Grand Avenue, Des Moines, Iowa 50304
(515) 279-8844 • TWIX 910-520-2535

See us at NCC booth 971-2

HOOK 3 WINNERS



DOLPHIN

$139.00
WINNER #1

$159.00
WINNER #2

$179.00
WINNER #3



data ed

WATCH THIS SPACE FOR COLOR WINNER

By TECO

DEMAND THESE UNITS FROM YOUR DEALER!

Data-Ed
18 Bridge Street
Salem, NH 03079
603-893-2047 (collect)

210

____ TM-12GX Monitors at $179.00 plus 2.75 shipping
____ TM-12G Monitors at $159.00 plus 2.75 shipping
____ TM-12 Monitors at $139.00 plus 2.75 shipping

VISA
master charge

Name _____
Address _____
City, State, Zip _____

□ Please send OEM information about your low cost custom fit smart printers.
□ Check or Money Order enclosed
□ C.O.D. Orders Accepted
□ Bill my-□ VISA-□ Mastercharge
Card No. _____
Exp. Date _____ Bank No. _____
Signature _____

BASIC subroutines allow you to reformat TRS-80 graphics for display on the H19 terminal.

TRS-80 Graphics On the Heath H19

By D. C. Shoemaker

Heath's H19 terminal or H89 computer handles graphics differently from the TRS-80. For three years, this fact frustrated many of my attempts to run TRS-80 programs on my H8. But I've finally decided to do something about it.

The charts in Fig. 1 should make clear what the relationships are between the TRS-80 graphics system coordinates and those of the H19. Using this relationship, it's relatively easy to create the algorithms used in the five demonstration programs that follow.

The major difficulty with the conversion is the way the TRS-80 subdivides each character position. Under normal circumstances, the H19 treats each character position as an indivisible unit, so certain allowances must be made for a degree of coarseness in the H19 display that would not be found in the TRS-80 when using the SET X,Y commands. You can avoid this, but you need a special disk-based device driver and a new ROM chip, available from Micro Interface, Inc. (Box 14520, Minneapolis, MN 55414). This is a more sophisticated approach, and I won't pursue it here except to say that it is definitely worth the $49.95 it cost. But it's not required for our purposes.

Listing 1. Subroutine to demonstrate TRS-80 PRINT@ command.

```
10 REM          GRAPHICS CONVERSION SUBROUTINE NUMBER 1
20 :
30 REM THIS ROUTINE CONVERTS TRS-80 SCREEN LOCATIONS TO X,Y COORDINATES
40 REM FOR DIRECT USE BY THE H19.  THIS IS A DEMONSTRATION OF THE
50 REM "PRINT AT" COMMAND.
60 :
70 PRINTCHR$(27);"F":REM SELECT GRAPHICS MODE
80 PRINTCHR$(27);"x5":REM CURSOR OFF
90 PRINTCHR$(27);CHR$(69);:REM ERASE SCREEN
100 INPUT"WHAT IS THE TRS-80 SCREEN LOCATION NUMBER";N
110 X=(N-(INT(N/64)*64)+1)
120 Y=INT(N/64)+1
130 AX=X+31:AY=Y+31:REM ADD ANY DESIRED OFFSET TO THE DECIMAL VALUES
140 PRINT"X =";X;", Y =";Y;", A =";AX;" AND B =";AY
150 PRINTCHR$(27);CHR$(89);CHR$(AY);CHR$(AX);"i"
160 PRINTCHR$(27);CHR$(72);:GOTO100
```

Listing 2. Subroutine to demonstrate TRS-80 SET and RESET commands.

```
10 REM          GRAPHICS CONVERSION SUBROUTINE NUMBER 2
20 :
30 REM THIS ROUTINE CONVERTS TRS-80 SCREEN LOCATIONS TO X,Y COORDINATES
40 REM FOR DIRECT USE BY THE H19.  IT ALSO DEMONSTRATES HOW TO "RESET"
50 REM THE LOCATION JUST "SET."  X & Y ARE THE TRS-80 COORDINATES, AND A & I
60 REM ARE THE H19 COORDINATES.
70 :
80 PRINTCHR$(27);"F":REM SELECT GRAPHICS MODE
90 PRINTCHR$(27);"x5":REM CURSOR OFF
100 PRINTCHR$(27);CHR$(69);:REM ERASE SCREEN
110 INPUT"WHAT IS THE TRS-80 SCREEN LOCATION NUMBER";N
120 X=(N-(INT(N/64)*64)+1):Y=INT(N/64)+1:AX=X+31:AY=Y+31
130 PRINT"X =";X;", Y =";Y;", A =";AX;" AND B =";AY
140 PRINTCHR$(27);CHR$(89);CHR$(AY);CHR$(AX);"i"
150 FOR I=1TO300:NEXT I
160 PRINTCHR$(27);CHR$(89);CHR$(AY);CHR$(AX);" "
170 PRINTCHR$(27);CHR$(72);:GOTO110
```

The Programs

The five programs presented here are largely self-explanatory. They will run under almost any version of Microsoft BASIC, under Heath's own Benton Harbor BASIC or under almost any other type of extended BASIC, whether tape, disk or ROM-based.

Some comments on how the program in Listing 1 works will help the understanding of the others. Lines 110 and 120 are the two conversion routines that take the TRS-80 screen




Fig. 1. The relationship between the TRS-80 format and that of the H19. The numbers represent the coordinates of a plotted point.

Address correspondence to D. C. Shoemaker, 2000 A Foxridge, Blacksburg, VA 24060.

location that would be given in the PRINT or PRINT AT command, and change it into two coordinates that the H19's Z-80 can make use of to control the cursor. Line 130 completes the process by adding the necessary offset to begin the plot at the upper-left edge of the screen.

The H19 manual explains why this is necessary, for those of you who want to pursue that. It's clear that any desired offset could be added here, for instance, to center the TRS-80 part of the display on the H19's screen. (That was actually done in the program in Listing 3; see line 100.) At the end of line 150, the "i" in quotes is merely a graphics character (a block) used for demonstration purposes. Naturally, it could be any of the other available characters.

The program in Listing 2 is based on its forerunner, but shows how the illuminated or SET point may be reset or erased by the same method. A delay is inserted in line 150 to make it easier to observe the effect on the screen.

Listing 3 is a program to outline the area of the TRS-80 screen superimposed on the H19 screen. Aside from a demonstration of the plotting technique, it may help in centering the otherwise offset graphics of whatever program you might be converting.

The program in Listing 4 illustrates how to handle the SET X,Y command when you won't be using the PRINT AT type of command. Line 120 is the conversion, and here, too, any desired offset may be used. Listing 5 is an extension of this, included to show one way to reset the point just set. Again, a delay is built into the subroutine at line 170.

Conclusions

You should now have a good idea how to go about converting those tantalizing TRS-80 programs into something your H19 can use. And if you have some other type of addressable-cursor terminal, you may find that the same approach will produce useful results.

Remember that this technique will not necessarily duplicate the speed of response of a memory-mapped video display such as the TRS-80 has, but at the normal H19 baud rate of 9600, the results are impressive. And think of all those programs you can now enter and run.■

Listing 3. Demonstration of the area of the TRS-80 screen superimposed on the H19 screen, for comparison of relative locations.

```
10 REM          GRAPHICS CONVERSION SUBROUTINE NUMBER 3
20 :
30 REM THIS ROUTINE BLOCKS OUT THE AREA THE TRS-80 SCREEN REPRESENTS ON
40 REM THE H19 SCREEN.
50 :
60 PRINTCHR$(27);"F":REM SELECT GRAPHICS MODE
70 PRINTCHR$(27);"x5":REM CURSOR OFF
80 PRINTCHR$(27);CHR$(69);:REM ERASE SCREEN
90 PRINTCHR$(27);CHR$(72);:REM HOME CURSOR
100 FOR J=0 TO 1023:N=J
110 X=(N-(INT(N/64)*64)+1):Y=INT(N/64)+1:AX=X+38:AY=Y+34
120 PRINTCHR$(27);CHR$(89);CHR$(AY);CHR$(AX);"i"
130 NEXT J:PRINT:PRINTTAB(16);"THIS IS THE SCREEN AREA USED BY ";@
        "TRS-80 PROGRAMS.":END
```

Listing 4. This subroutine demonstrates the TRS-80 SET X,Y command.

```
10 REM          GRAPHICS CONVERSION SUBROUTINE NUMBER 4
20 :
30 REM THIS ROUTINE CONVERTS TRS-80 SCREEN LOCATIONS TO X,Y COORDINATES
40 REM FOR DIRECT USE BY THE H19.  THIS IS A DEMONSTRATION OF THE
50 REM "SET X,Y" COMMAND.
60 :
70 PRINTCHR$(27);"F":REM SELECT GRAPHICS MODE
80 PRINTCHR$(27);"x5":REM CURSOR OFF
90 PRINTCHR$(27);CHR$(69);:REM ERASE SCREEN
100 INPUT"WHAT ARE THE TRS-80 SET/RESET COORDINATES";X,Y
110 REM ADD ANY DESIRED OFFSET TO 31 IN LINE 120
120 AX=INT(X/2)+31:AY=INT(Y/2)+31
130 REM X & Y ARE THE H19 COORDINATES
140 PRINT"X =";AX;" AND Y =";AY
150 PRINTCHR$(27);CHR$(89);CHR$(AY);CHR$(AX);"i";
160 PRINTCHR$(27);CHR$(72);:GOTO100
```

Listing 5. Subroutine to demonstrate the difference in resolution between the H19 and the TRS-80.

```
10 REM          GRAPHICS CONVERSION SUBROUTINE NUMBER 5
20 :
30 REM THIS ROUTINE CONVERTS TRS-80 SCREEN LOCATIONS TO X,Y COORDINATES
40 REM FOR DIRECT USE BY THE H19.  THIS IS A DEMONSTRATION OF THE
50 REM "SET X,Y" AND "RESET X,Y" COMMANDS.  NOTE THAT DUE TO COARSER
60 REM RESOLUTION, ONLY EVEN-NUMBERED TRS-80 COORDINATES PLOT ON THE H19.
70 :
80 PRINTCHR$(27);"F":REM SELECT GRAPHICS MODE
90 PRINTCHR$(27);"x5":REM CURSOR OFF
100 PRINTCHR$(27);CHR$(69);:REM ERASE SCREEN
110 INPUT"WHAT ARE THE TRS-80 SET/RESET COORDINATES";X,Y
120 REM ADD ANY DESIRED OFFSET TO 31 IN LINE 130
130 AX=INT(X/2)+31:AY=INT(Y/2)+31
140 REM X & Y ARE THE H19 COORDINATES
150 PRINT"X =";AX;" AND Y =";AY
160 PRINTCHR$(27);CHR$(89);CHR$(AY);CHR$(AX);"i";
170 FOR I=1TO300:NEXT I
180 PRINTCHR$(27);CHR$(89);CHR$(AY);CHR$(AX);" ";
190 PRINTCHR$(27);CHR$(72);:GOTO110
```


OHIO SCIENTIFIC

S-FORTH — a full implementation of Fig-FORTH including editor, virtual disk sub-system, and compatibility with OS65D-3 on 5¼" or 8" disk. $34.95.
Source listing $24.95.
Both for $49.95.

TOUCH TYPING MADE EASY — 15 lesson set teaches you to "touch type". Now also available for the C1P. 8K. $19.95.

TITANIC QUEST — a real time search where you risk your remaining supplies to find the Titanic. 8K. $6.95.

TEXT EDITOR — the best screen text editor available for OSI C4P, C8P disk systems. $19.95.

Send for our FREE 14 page software and hardware catalog. Includes photos and complete descriptions of all game, utility, and business software.

↙193

Aurora Software Associates
P.O. Box 99553
Cleveland, Ohio 44199
(216) 221-6981

↙See List of Advertisers on page 194

At last, black and white, 256 × 256 pixel graphics as good as any—and it doesn't eat up memory space.

6800 High-Speed, High-Resolution Graphics

By Terry Mayhugh

Although the 6800 community has been blessed with both high-quality hardware and software, high-resolution graphics—standard in many other all-in-one computers—has been practically nonexistent. The economical SWTP GT-6144 board was a step in the right direction a few years ago, but the 96 × 64 resolution is poor by today's standards.

A 256 × 256 display, on the other hand, is quite adequate for most purposes. For plotting it offers a resolution better than .4 percent full scale; and, of course, for games and animation this order of resolution has been shown to be quite adequate. Any 6800 owner who has seen some of the intricate high-res games running on the Apple's 280 × 190 display must surely long for similar capability.

The Electric Crayon by Percom, with its own on-board 6802 microprocessor and nine resolution modes (highest is 256 × 192 with a single color available) sounded exactly like what I wanted. After receiving the unit and interfacing it to my SWTP 6800, however, I sadly discovered that although it was fine for plotting, its excruciatingly slow speed makes animation and rapidly moving games impossible.

The EGOS operating system, which comes with the unit, is so cumbersome that, once the computer transmits the starting point and length of a 256-pixel horizontal line to be plotted in the high-res mode, the unit requires about two seconds to draw it. (The line drawing routines handle horizontal and vertical lines only.) Although provision has been made to let the user install his own operating system, I was not able to improve on the speed by much more than a factor of 5 or 6 without creating objectionable display flicker.

However, even improving the speed by a factor of 10 wouldn't put this unit in the proverbial ball park.

I still like the concept, though, of communicating with the display RAM through an I/O port as the Crayon does. Although certainly not optimum for highest operating speed, precious computer memory (8K for 256 × 256 display) is not robbed for use by the video display. This philosophy allows the CPU to effectively control more than 64K of memory.

After coming across the MMD256D CRT controller module manufactured by Matrox (5800 Andover Ave., Montreal, Quebec H4T 1H4), I decided to put together my own system—both the hardware and software. Since this module has a worst case access time of 2 us per pixel, the controller would certainly not limit the speed of my display. An inspection of the data sheet, however, revealed that the unit would not simply "bolt on" to a single parallel port, and I would be on my own to come up with the software for the graphics commands.



The MMD256D CRT controller. (Photos by Steve Hall)

Address correspondence to Terry Mayhugh, 11632 Midhurst Drive, Concord, TN 37922.



An inside look of the graphics controller.

The projected results, however, would be well worth the effort. I would have a high-speed, high-resolution display which does not use computer memory and, except for a lack of color, would perform as well as anything available with the appliance-type computer.

Hardware Requirements

The Matrox module is a complete graphics CRT display controller with a composite video output capable of driving any standard TV monitor. This unit, in conjunction with a high-resolution monitor such as the Leedex Video 100, gives a beautiful, high-quality display. It contains the necessary sync and video generators, 8K of refresh memory and sufficient electronics to interface to a 16-bit computer bus or multiple (at least 3) eight-bit parallel I/O ports. However, to interface it to a single Southwest Tech MPLA card, some additional electronics is required, including a minor modification to the I/O card itself. Fortunately, due to the high-speed access time of the controller, these additional interface requirements are minimal.

First, the eight A-side lines of the MPLA card must be configured for computer output. This is easily done with the OA board jumper as described in the MPLA assembly instructions. The B-side, however, should be configured for computer output on the four most significant bits and for computer input on the four least significant bits. Actually, only computer input line PB0 is really used; but the modification is most easily done for lines in groups of four.

To do this, the IB jumper should be installed to set up the B-side of the PIA for computer input of all eight lines. Then the two traces on the rear of the board leading to pins 7 and 9 of IC3 should be cut with an X-acto knife as close as possible to the IC pins. Pin 9 must next be connected to ground (a convenient point is pin 8 of IC3), and pin 7 should be connected to +5 V through a 4.7k resistor (a convenient point for this connection is pin 16 of IC3).

This board modification reverses the direction of the Tri-state transceivers for bits PB4 through PB7. As you will see later, the internal registers of the PIA must also be properly configured with an appropriate software initialization routine. Handshake lines CA2 and CB2 are used in this application as additional computer output lines; this is standard for this I/O card.

I should mention here that there is an error in the schematic included with the MPLA assembly instructions concerning IC7, which contains the CA2 and CB2 line drivers. Pin 9 of this IC is actually connected to +5 V through a 4.7k resistor as required to set up the CA2 and CB2 lines as outputs and the CA1 and CB1 lines as inputs. The schematic provided by SWTP erroneously shows pin 7 grounded, although the board layout is correct.

The schematic in Fig. 1 shows the additional interface hardware required: two 74LS374 eight-bit latches, two 7402 quad NOR gate packages used for logic steering and a 7474 D flip-flop used as a single bit latch. Lines PA0 through PA7 parallel-feed the D inputs of both eight-bit latches, which are used as the pixel X,Y coordinate registers. Under computer control, line PB6 steers the CB2 strobe to the appropriate register so that the X and Y coordinates of the pixel are properly loaded and presented to the CRT controller prior to a read or write operation.

When a computer line PB6 makes a low-to-high transition, CB2 strobes the address information from the

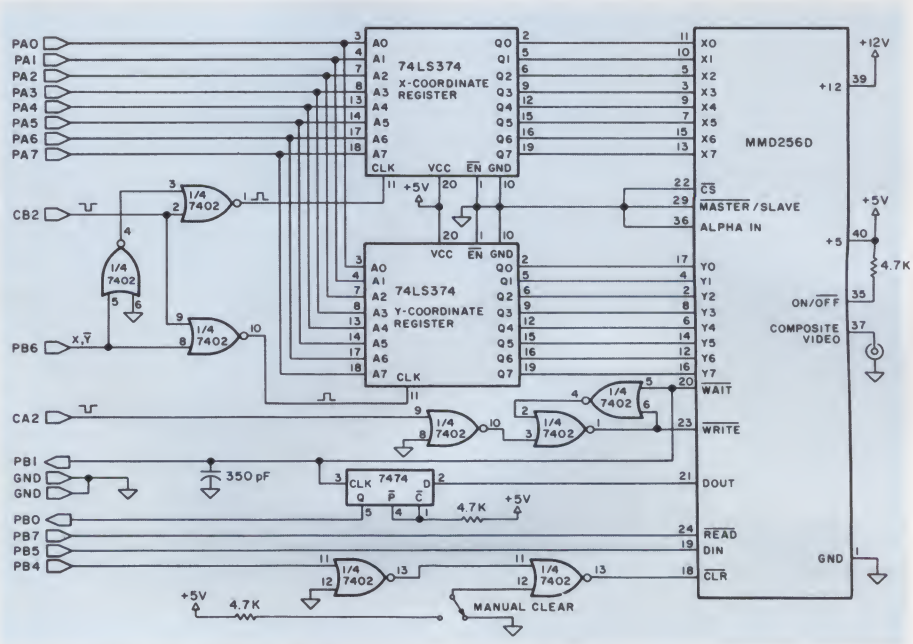


Fig. 1. High-resolution graphics controller schematic.



Back view of the controller.

A-side of the PIA into the X coordinate register. Conversely, a high-to-low transition of PB6 loads the PIA A-side data into the Y coordinate register.

To write to a pixel, its X and Y coordinates are first loaded into the two registers. The DIN input bit (line PB5) is set for the desired color, either white or black; then a dummy READ PIA A-side instruction is executed so that CA2 toggles the $\overline{\text{WRITE}}$ input to the MMD-256D low. A $\overline{\text{WAIT}}$ low signal is issued from the module which latches $\overline{\text{WRITE}}$ to a low state until the module's internal write cycle is completed, and the pixel has been written.

The worst case 2 us access time of the module is so fast that for typical micro applications no computer handshake is required. As can be seen from the schematic, the $\overline{\text{WAIT}}$ is also sent to the computer via PB1 for possible future use. It is not currently used by the software driver described later in this article.

A typical pixel read cycle is a little more complicated. The coordinate registers are again first loaded with the coordinates of the pixel to be interrogated. The normally high $\overline{\text{READ}}$ line PB7 is then dropped low by the computer, and the pixel status (high = pixel ON, or white) is clocked into the D flip-flop by the rising edge of the $\overline{\text{WAIT}}$ signal. The Q output of this latch is read by the computer, and then the $\overline{\text{READ}}$ line is reset to its normally high state to complete the cycle. The 350 pF capacitor on the clock input of the D flip-flop creates a time delay in order to ensure that DOUT is valid before being latched.

The $\overline{\text{CLR}}$ line PB4 is an asynchronous input to the controller module, which unconditionally sets all 65,536 pixels either white or black, depending on the status of the DIN line. Matrox specifies the minimum duration of a logic low on this clear line at 40 ms to ensure a complete screen erasure. A software timing loop may be fine-tuned to accomplish this.

The controller itself requires two regulated power supplies: +5 V at 400 mA and +12 V at 100 mA. This additional 5-volt load can be comfortably handled by the 5-volt regulator on board the MPLA card. A small heatsink fashioned from a 1 inch by 2 inch piece of copper sheet bent in the shape of an L and placed under the regulator IC will provide some additional cooling. The 12-volt power can also, in most cases, be obtained from the computer. A Fairchild 7812 three-terminal regulator IC can be used to drop the computer's unregulated 14–16 V line down to 12 V for use by the module.

Although Matrox specifies the MMD256D to be a 256×256 pixel controller, if the unit is used as received, you will only be able to display 240 lines of 256 dots. This is because the unit was designed to operate with European television, where a 50 Hz vertical scan rate is standard. A set of printed circuit board jumpers within the module are reconfigured at the factory to convert the unit to standard 60 Hz vertical scan for American customers. As a result, the last 15 lines of the display buffers are not scanned and therefore are not visible.

I opened my unit and cut jumpers 1, 3 and 5 and installed jumpers 2, 4 and 6. (The jumper positions are marked on the printed circuit board within the module.) This converts the unit back to a 50 Hz vertical scan rate and restores the display to 256×256 pixels.

In general, however, two possible problems can result from this modification, depending on the monitor used for the display. The lock-in range for vertical sync may not be wide enough in some video monitors to include 50 Hz so that an unacceptable vertical roll results. The Leedex Video 100 monitor that I use is specified to lock onto vertical scan rates between 45 Hz and 60 Hz, and so this did not become a problem for me.

A second possible problem is an annoying jitter which can develop in the display due to a beating of the 50 Hz vertical scan with any 60 Hz ripple which has found its way into the vertical sync section of the monitor, usually through inadequate filtering in the low voltage power supply. The Leedex monitor showed a little jitter, which was on the verge of becoming objectionable. I cured this by putting an additional 20,000 pF capacitor across the low voltage regulated output. If you don't wish to perform these modifications to the module or monitor, the unit will work fine in the 240×256 mode.

Software Driver

No peripheral is useful without good control software, and so I wrote a driver package to control this SWPT6800/MMD256D combination. Five high-level commands, INITG, ERASE, READ, DOT and VECTOR, are provided to allow high-level graphics control from a machine language program or through a BASIC interpreter using the CALL or USER functions.

The 13-byte scratchpad area has been ORGed at location $0000 to take advantage of the 6800's zero page addressing mode. For historical reasons, most 6800 BASIC interpreters do not use the first 32 bytes of page 0, and so this should not create any conflicts. The driver routines themselves are ORGed at $A100, but they can be relocated to any other convenient area in your computer's memory

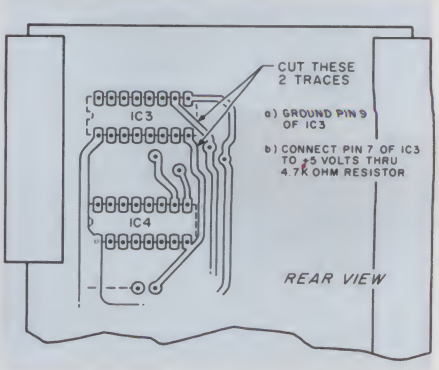


Fig. 2. MPLA board modifications.

Orange Micro ✓310

"THE COMPUTER PRINTER SPECIALISTS"

UP TO 25% DISCOUNTS! — SAME DAY SHIPMENT!

NEW CENTRONICS 739 (RADIO SHACK LINE PRINTER IV)

With Graphics and Word Processing Print Quality



• 18 x 9 dot matrix; suitable for word processing • Underlining • proportional spacing • right margin justification • serif typeface • 80/100 CPS • 9½" Pin Feed/Friction feed • Reverse Platen • 80/132 columns • Top of form

CENTRONICS 739-1 (Parallel) ..... (List $995) **$ Call**
CENTRONICS 739-3 (Serial) ..... (List $1045) **$ Call**

ANADEX

Dot Graphics, Wide Carriage



• 11 x 9 dot matrix; lower case descenders • Dot resolution graphics • Bi-directional, logic seeking • Up to 200 CPS • RS 232 Serial & Parallel • Forms control • X-ON/X-OFF • Up to 6 part copy.

ANADEX 9501 ..... (List $1650) **$1350**

AXIOM

Dot Graphics, Low Price



• Dot addressable graphics • 70 CPS • 12 characters per inch • 80 columns • adjustable tractors • 3 part copies • Manufactured by Sieko • Parallel, RS232 serial, IEEE-488 interfaces available.

AXIOM GP-80M ..... (List $399) **$349**

IDS PAPER TIGERS

Dot Resolution Graphics, quality print, speed



• 7 wire printhead (445); 9 wire printhead (460) with lower case descenders • Over 150 CPS • bi-directional, logic seeking (460) • 8 character sizes; 80-132 columns • Adjustable tractors • High-resolution dot graphics • Proportional spacing & text justification (460).

IDS 445G 7 wire printhead, graphics ..... (List $895) **$ 750**
IDS 460G 9 wire printhead, graphics ..... (List $1394) **$1150**
IDS 560G 9 wire, wide carriage, graphics ..... (List $1794) **$1400**

CALL FOR FREE CATALOG


(800) 854-8275

CA, AK, HI (714) 630-3322

At Orange Micro, we try to fit the right printer to your application. Call our printer specialists for free consultation.

EPSON MX80/MX70

Low-Priced Professional Print Quality



• 9 x 9 dot matrix • Lower case descenders • 80 CPS • Bidirectional, Logic seeking • 40, 66, 80, 132 columns per line • 64 special graphic characters: TRS-80 Compatible • Forms handling • Multi-pass printing • Adjustable tractors

We also carry a full line of Epson Accessories.

EPSON MX80 ..... (List $645) **$Call**
EPSON MX 70 Dot graphics, 5 x 7 matrix ..... (List $450) **$Call**
EPSON MX100 wide carriage ..... (List $995) **$Call**
GRAPPLER™ Apple graphics parallel interface and cable ..... **$ 165**

MX80/70 FRICTION FEED KIT

Uses installable kit for single sheets.
Easy 15 minute installation. **$ 75**

ANACOM

Low Cost, High Speed, Wide Carriage

• 9 x 9 dot matrix • Lower case descenders • Wide carriage • Adjustable tractors to 16" • 150 CPS, Bidirectional, Logic Seeking

ANACOM 150 ..... (List $1350) **$ Call**

NEC SPINWRITER


High Speed Letter Quality

• 55 CPS • Typewriter quality • Bidirectional • Plotting • proportional spacing.

5510-5 RO, Serial, w/tractors ..... (List $2995) **$2675**
5530-5 RO, Parallel, w/tractors ..... (List $2970) **$2650**

TELEVIDEO CRT'S

AT DISCOUNT PRICES!



QUANTITY PRICING AVAILABLE

TVI 910
TVI 912C
TVI 920C
TVI 950

Please Call Toll Free
Prices are too low to advertise

PRINTERS

MALIBU 165 wide carriage, graphics, letter quality .. (List $2495) **$ 1975**
QUME 5/45 typewriter quality ..... (List $2905) **$ 2559**
VISTA-C. ITOH Starwriter, letter quality ..... (List $1895) **$ Call**

INTERFACE EQUIPMENT

EPSON ACCESSORIES ..... **$ Call**
ORANGE INTERFACE for Apple II parallel interface board & cable ..... **$ 110**
MICROTRONICS Atari parallel interface ..... **$ 69**
TRS-80 CABLES to keyboard or Exp. interface ..... **$ Call**
NOVATION D-CAT direct connect modem ..... **$ Call**

RETAIL PRINTER STORES:
3150 E. La Palma, #I, Anaheim, CA.
13604 Ventura Bl., Sherman Oaks, CA.
Store Hours: M-F 10-6 Sat. 10-4


Phone orders WELCOME; same day shipment. Free use of VISA & MASTERCARD. Personal checks require 2 weeks to clear. Manufacturer's warranty included on all equipment. Prices subject to revision.

Orange Micro, Inc.
3150 E. La Palma, Suite I
Anaheim, CA 92806

Are you looking for. . .



When you subscribe to a magazine, you want to get REAL SOLID INFORMATION, not just a giant catalog of ads every month. . . and mostly the same ads, if you've noticed. *Kilobaud Microcomputing has the meat:* feature articles written by the most knowledgeable people in the field, yet written for the relative newcomer to computing. *Kilobaud Microcomputing* has more articles than any other magazine in the field. . . by a wide margin . . . regardless of fatness. In 1980 *Kilobaud Microcomputing* published *409 articles*. . . and that included a wealth of programs which you could use.

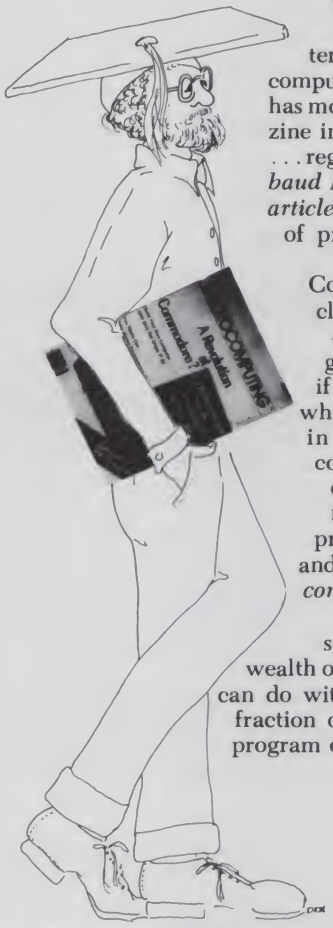


Compare that with 133 paltry articles in *Brand B*, the "*Fat Albert*" of the computer field. You can get far more from your computer if you can really understand it, which is where the simple articles in *Kilobaud Microcomputing* come in. You don't need a science degree to get through it like some magazines I could mention. The practical reviews of both hardware and software in *Kilobaud Microcomputing* can save you a bundle . . . far more than the cost of a subscription . . . even for life. The wealth of programs give you things you can do with your computer. . . again at a fraction of the cost of buying the same program over the counter. Further, the articles on programs *help you learn* how to write and modify programs that you have to do yourself.

When you subscribe to a magazine, you want to pay for the information, not a bunch of ads. The advertisers are already paying for them so why should you? *Kilobaud Microcomputing* has been running around 40% advertising while *Brand B* has been running 60-70%, making fat issues, but with *little real information* for you.

You want to learn about computers as fast as you can. The editors of *Kilobaud Microcomputing* are under orders (pain of death or worse) to keep the material as simple as possible so new comers will be able to learn about computers as quickly as possible. *Kilobaud Microcomputing* covers all types of microcomputers, including (to some extent) the TRS-80 though this is covered overwhelmingly in *80 Microcomputing*, a sister publication.

At $2.95 a copy, *Kilobaud Microcomputing* is the best information buy you'll find. At $25 a year (you save $10.40 off the newsstand price) you're investing in the most valuable library of microcomputing you can buy. . . 2,960 pages in 1980!

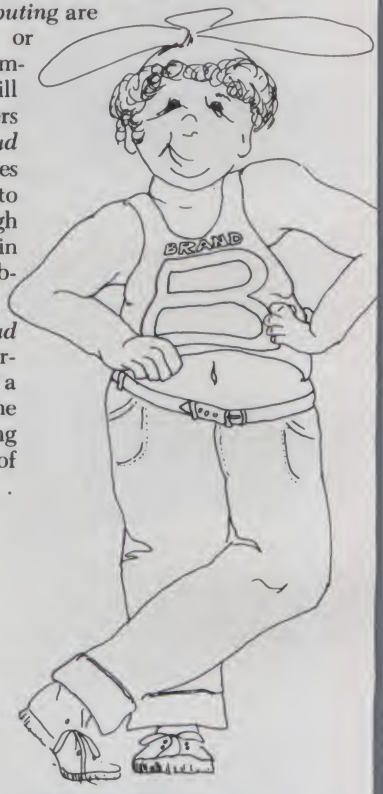



☐ **So, please bill me $25 for one year's subscription to *Kilobaud Microcomputing.***

Canadian $27/1 year only, US funds.
Foreign $35/1 year only, US funds.
Please allow 4-6 weeks for delivery.

name _____

street _____

city _____ **state**_____ **zip**_____

Kilobaud Microcomputing ● Box 997 ● Farmingdale NY 11737

is a division of GREENE **Peterborough NH 03458**

317B7

map to avoid possible problems with any coresident software.

The COLOR register contains the color in present use, either black or white, and is accessed by the ERASE, DOT and VECTOR routines. This byte must be reloaded (or poked in BASIC) with a new color byte only when it is to be changed. This byte is masked before it is used by any of the subroutines so that only bit 5 is read. This prevents accidental bombing of the driver when illegal color bytes are loaded and allows interesting even/odd effects to be easily plotted.

The PIXEL register contains the status of the pixel which has been most recently read. This byte may be tested (or peeked, if in BASIC) to determine the pixel status. The X1, Y1 registers define the current coordinates of the cursor. The X2, Y2 register pair contains the end point coordinates of the most recently defined vector or line and is accessed by the VECTOR drawing routine.

The INITG routine must be executed once at the beginning of your program before any of the other graphics subroutines are called. This routine clears the entire video display to all black, sets COLOR to white, and places the cursor at (0,0).

The controller software is written so that the origin (0,0) is sensibly located at the lower left-hand side of the display. This corresponds to the location of the origin in the familiar Cartesian coordinate system. If you wish, instead, to place the origin at the upper left-hand corner to maintain compatibility with most other micrographics systems, then you must NOP the bytes at labels ORD1 through ORD5.

The ERASE routine may be called anytime you wish to clear the screen to a single color. Bit 5 of the byte in the COLOR register must be properly set (white = 1 or black = 0) before this command is used. The execution time for this routine is about 40 ms, which is the minimum clear pulse width specified for the module. You can experiment with the software timing loop within this subroutine to even further minimize this execution time for your particular module.

The READ routine is called when you wish to interrogate a particular pixel to determine its present color. The cursor is first set over the pixel by appropriately loading the X1, Y1 registers; then this subroutine is called. When the READ cycle is completed the pixel status will reside in the PIXEL register (white = $01 and black = $00). This routine requires approximately 60 machine cycles for execution, which corresponds to about 45 us per read on a 1.3 MHz computer.

Software driver in 6800 BASIC.

```
                    1: ************************************************************************
                    2: *                              MTROX1                                  *
                    3: *                  HI-RES GRAPHICS CONTROLLER DRIVER                   *
                    4: *      for SWTP 6800 microcomputer interfaced to Matrox MMD-256D       *
                    5: *                          Terry L. Mayhugh                            *
                    6: ************************************************************************

                    8: * Timing loop is initialized for a 1.3 MHz CPU clock.
                    9: * Origin (0,0) located at lower left corner of display.
                   10: * To relocate origin to upper left corner, NOP bytes at labels
                   11: * ORD1 through ORD5.

8018                13: PIA1AD EQU   $8018       PIA Port number 6
801A                14: PIA1BD EQU   PIA1AD+2

0000                16:        ORG   $0000

                    18: *     Scratchpad area for controller driver
0000                19: COLOR  RMB   1           Color Register: bit 5=1 for white, bit 5=0 for black
0001                20: PIXEL  RMB   1           Result of pixel read:  White=$01  Black=$00
0002                21: X1     RMB   1           Cursor coordinates
0003                22: Y1     RMB   1           *
0004                23: X2     RMB   1           Endpoint coordinates of vector
0005                24: Y2     RMB   1           *
0006                25: DX     RMB   1           Vector routine temporaries
0007                26: DY     RMB   1           *
0008                27: X1LOAD RMB   1           *
0009                28: Y1LOAD RMB   1           *
000A                29: XDIFF  RMB   1           *
000B                30: YDIFF  RMB   1           *
000C                31: SLOPE  RMB   1           *
000D                32: TEMPIX RMB   2           Index register temporary storage

A100                34:        ORG   $A100

                    36: *     Interface Initialization Command
                    37: *     Screen is cleared to all black.
                    38: *     Cursor is set to origin (0,0).
                    39: *     COLOR is set to white before exiting.
A100 CE 8018        40: INITG  LDX   #PIA1AD
A103 6F 01          41:        CLR   1,X
A105 6F 03          42:        CLR   3,X
A107 6F 00          43:        CLR   0,X
A109 6F 02          44:        CLR   2,X
A10B 63 00          45:        COM   0,X         all outputs on A-side of PIA
A10D 86 F0          46:        LDA A #%11110000  4 outputs, 4 inputs on B-side of PIA
A10F A7 02          47:        STA A 2,X         PB7=READ'     PB6=X/Y'
                    48: *                         PB5=color     PB4=CLEAR'
                    49: *                         PB1=WAIT'     PB0=pixel
A111 86 2E          50:        LDA A #%00101110
A113 A7 01          51:        STA A 1,X         config. CA2 as WRITE' strobe
A115 A7 03          52:        STA A 3,X         config. CB2 as coordinate strobe
```

More →

Listing continued.

```
A117 7F 0000   53:          CLR   COLOR        set COLOR to black for initial screen erase
A11A 7F 0002   54:          CLR   X1           home to (0,0)
A11D 7F 0003   55:          CLR   Y1           *
A120 8D 05     56:          BSR   ERASE        clear screen
A122 86 20     57:          LDA A #$20
A124 97 00     58:          STA A COLOR        initialize COLOR=white
A126 39        59:          RTS

               61: *     Erase Screen Command
               62: *     All pixels are written with color residing in COLOR register.
               63: *     Subroutine requires 40 msec per erase.
A127 96 00     64: ERASE   LDA A COLOR        pick up color bit
A129 84 20     65:         AND A #%00100000   mask off color bit
A12B 8B 80     66:         ADD A #%10000000
A12D B7 801A   67:         STA A PIA1BD       pull CLEAR' line low
A130 DF 0D     68:         STX   TEMPIX       push index register
A132 CE 1970   69:         LDX   #$1970       40 msec ERASE interval
A135 09        70: HOLDIT  DEX
A136 26 FD     71:         BNE   HOLDIT
A138 8B 10     72:         ADD A #%00010000   restore CLEAR' line high
A13A B7 801A   73:         STA A PIA1BD
A13D DE 0D     74:         LDX   TEMPIX       pull index register
A13F 39        75:         RTS

               77: *     Read Pixel at (X1,Y1) Command
               78: *     Status of pixel is stored in PIXEL register.
               79: *     Status also available in A accumulator upon exit.
               80: *     White=1     Black=0
               81: *     Subroutine requires 61 machine cycles per read
A140 96 03     82: READ    LDA A Y1
A142 43        83: ORD1    COM A              reverse ordinate
A143 B7 8018   84:         STA A PIA1AD       load Y1 coordinate
A146 C6 90     85:         LDA B #%10010000
A148 F7 801A   86:         STA B PIA1BD       strobe in Y1 coordinate
A14B 96 02     87:         LDA A X1
A14D B7 8018   88:         STA A PIA1AD       load X1 coordinate
A150 CB 40     89:         ADD B #%01000000
A152 F7 801A   90:         STA B PIA1BD       strobe in X1 coordinate
A155 C4 70     91:         AND B #%01110000
A157 F7 801A   92:         STA B PIA1BD       toggle READ' line low
A15A B6 801A   93:         LDA A PIA1BD
A15D 84 01     94:         AND A #%00000001   mask pixel bit
A15F 97 01     95:         STA A PIXEL        store the pixel bit
A161 CB 80     96:         ADD B #%10000000
A163 F7 801A   97:         STA B PIA1BD       restore READ' line
A166 39        98:         RTS
              100: *     Write Pixel at (X1,Y1) Command
              101: *     Pixel is written according to present COLOR contents.
              102: *     Subroutine requires 46 machine cycles per write
A167 D6 02    103: DOT     LDA B X1
A169 F7 8018  104:         STA B PIA1AD       load X1 coordinate
A16C 96 00    105:         LDA A COLOR        pick up color byte
A16E 84 20    106:         AND A #%00100000   mask off color bit
A170 8B D0    107:         ADD A #%11010000
A172 B7 801A  108:         STA A PIA1BD       strobe in X1 coordinate
A175 D6 03    109:         LDA B Y1
A177 53       110: ORD2    COM B              reverse ordinate
A178 F7 8018  111:         STA B PIA1AD       load Y1 coordinate
A17B 84 B0    112:         AND A #%10110000
A17D B7 801A  113:         STA A PIA1BD       strobe in Y1 coordinate
A180 F6 8018  114:         LDA B PIA1AD       pulse WRITE' line
A183 39       115:         RTS

              117: *     High Speed Vector Generator from (X1,Y1) to (X2,Y2) Command
              118: *     Update (X2,Y2) before entry.
              119: *     (X1,Y1) pair is automatically updated to (X2,Y2) before exit.
              120: *     Subroutine requires an average set-up and exit overhead of 100 machine
              121: *     cycles per vector along with an average 70 cycles per pixel per vector.
              122: *     Fast exit for vertical and horizontal line is provided.
A184 C6 01    123: VECTOR LDA B #1           initialize increment registers
A186 D7 06    124:         STA B DX           *
A188 D7 07    125:         STA B DY           *
A18A 7F 000C  126:         CLR   SLOPE        clear slope register
A18D D6 00    127:         LDA B COLOR        pick up color byte
A18F C4 20    128:         AND B #%00100000   mask off color bit
A191 CB D0    129:         ADD B #%11010000
A193 D7 08    130:         STA B X1LOAD       strobe byte for X1 coordinate
A195 C4 B0    131:         AND B #%10110000
A197 D7 09    132:         STA B Y1LOAD       strobe byte for Y1 coordinate
A199 96 04    133: DELX    LDA A X2
A19B 44       134:         LSR A
A19C D6 02    135:         LDA B X1
A19E 54       136:         LSR B
A19F 10       137:         SBA
A1A0 97 0A    138:         STA A XDIFF        X distance/2 to move
A1A2 2C 06    139:         BGE   POSX         X direction is east
A1A4 70 0006  140:         NEG   DX           X direction is west
A1A7 70 000A  141:         NEG   XDIFF       *
A1AA 26 03    142: POSX    BNE   DELY
```

More →

Listing continued.

```
A1AC 73 000C  143:          COM   SLOPE       vertical movement only
A1AF 96 05    144: DELY     LDA A Y2
A1B1 44       145:          LSR A
A1B2 D6 03    146:          LDA B Y1
A1B4 54       147:          LSR B
A1B5 10       148:          SBA
A1B6 97 0B    149:          STA A YDIFF       Y distance/2 to move
A1B8 2C 06    150:          BGE   PLOT        direction is north
A1BA 70 0007  151:          NEG   DY          direction is south
A1BD 70 000B  152:          NEG   YDIFF       *
A1C0 96 0C    153: PLOT     LDA A SLOPE       initialize slope accumulator
A1C2 D6 02    154: WRTDOT   LDA B X1
A1C4 F7 8018  155:          STA B PIA1AD      load X1 coordinate
A1C7 D6 08    156:          LDA B X1LOAD
A1C9 F7 801A  157:          STA B PIA1BD      strobe in X1 coordinate
A1CC D6 03    158:          LDA B Y1
A1CE 53       159: ORD3     COM B             reverse ordinate
A1CF F7 8018  160:          STA B PIA1AD      load Y1 coordinate
A1D2 D6 09    161:          LDA B Y1LOAD
A1D4 F7 801A  162:          STA B PIA1BD      strobe in Y1 coordinate
A1D7 F6 8018  163:          LDA B PIA1AD      pulse WRITE' line
A1DA D6 02    164:          LDA B X1
A1DC D0 04    165:          SUB B X2          X movement complete?
A1DE 27 49    166:          BEQ   CHECKY
A1E0 4D       167:          TST A
A1E1 2D 0A    168:          BLT   INCY
A1E3 D6 02    169:          LDA B X1
A1E5 DB 06    170:          ADD B DX
A1E7 D7 02    171:          STA B X1          update X1 coordinate register
A1E9 90 0B    172:          SUB A YDIFF       update slope accumulator
A1EB 20 D5    173:          BRA   WRTDOT
A1ED D6 03    174: INCY     LDA B Y1
A1EF DB 07    175:          ADD B DY
A1F1 D7 03    176:          STA B Y1          update Y1 coordinate register
A1F3 9B 0A    177:          ADD A XDIFF       update slope accumulator
A1F5 D1 05    178:          CMP B Y2          Y movement complete?
A1F7 26 C9    179:          BNE   WRTDOT
A1F9 D6 02    180:          LDA B X1
A1FB F7 8018  181:          STA B PIA1AD      load X1 coordinate
A1FE D6 08    182:          LDA B X1LOAD
A200 F7 801A  183:          STA B PIA1BD      strobe in X1 coordinate
A203 D6 03    184:          LDA B Y1
A205 53       185: ORD4     COM B             reverse ordinate
A206 F7 8018  186:          STA B PIA1AD      load Y1 coordinate
A209 D6 09    187:          LDA B Y1LOAD
A20B F7 801A  188:          STA B PIA1BD      strobe in Y1 coordinate
A20E F6 8018  189:          LDA B PIA1AD      pulse WRITE' line
A211 96 02    190: FINISX   LDA A X1          dump slope, finish X movement
A213 9B 06    191:          ADD A DX
A215 97 02    192:          STA A X1          update X1 coordinate register
A217 D6 02    193:          LDA B X1
A219 F7 8018  194:          STA B PIA1AD      load X1 coordinate
A21C D6 08    195:          LDA B X1LOAD
A21E F7 801A  196:          STA B PIA1BD      strobe in X1 coordinate
A221 F6 8018  197:          LDA B PIA1AD      pulse WRITE' line
A224 90 04    198:          SUB A X2          X movement complete?
A226 26 E9    199:          BNE   FINISX
A228 39       200:          RTS
A229 96 03    201: CHECKY   LDA A Y1          X movement is complete
A22B 91 05    202:          CMP A Y2          Y movement complete?
A22D 26 01    203:          BNE   FINISY
A22F 39       204:          RTS
A230 96 03    205: FINISY   LDA A Y1          dump slope, finish Y movement
A232 9B 07    206:          ADD A DY
A234 97 03    207:          STA A Y1          update Y1 coordinate register
A236 D6 03    208:          LDA B Y1
A238 53       209: ORD5     COM B             reverse ordinate
A239 F7 8018  210:          STA B PIA1AD      load Y1 coordinate
A23C D6 09    211:          LDA B Y1LOAD
A23E F7 801A  212:          STA B PIA1BD      strobe in Y1 coordinate
A241 F6 8018  213:          LDA B PIA1AD      pulse WRITE' line
A244 90 05    214:          SUB A Y2
A246 26 E8    215:          BNE   FINISY      Y movement complete?
A248 39       216:          RTS
              217:          END
     NO ERROR(S) DETECTED

   SYMBOL TABLE:
CHECKY  A229    COLOR   0000    DELX    A199    DELY    A1AF
DOT     A167    DX      0006    DY      0007    ERASE   A127
FINISX  A211    FINISY  A230    HOLDIT  A135    INCY    A1ED
INITG   A100    ORD1    A142    ORD2    A177    ORD3    A1CE
ORD4    A205    ORD5    A238    PIA1AD  8018    PIA1BD  801A
PIXEL   0001    PLOT    A1C0    POSX    A1AA    READ    A140
SLOPE   000C    TEMPIX  000D    VECTOR  A184    WRTDOT  A1C2
X1      0002    X1LOAD  0008    X2      0004    XDIFF   000A
Y1      0003    Y1LOAD  0009    Y2      0005    YDIFF   000B
```

```
0090 REM RANDOM WALK demonstration using BASIC and graphics driver
0100 LET C=0 : REM location of COLOR byte
0110 LET P=1 : REM location of PIXEL byte
0120 LET X1=2: REM cursor x coordinate
0130 LET Y1=3: REM cursor y coordinate
0140 LET X2=4: REM vector x endpoint
0150 LET Y2=5: REM vector y endpoint
0160 LET I=41216 : REM location of graphics initialization routine
0170 LET E=41255 : REM location of screen erase routine
0180 LET R=41280 : REM location of pixel read routine
0190 LET W=41319 : REM location of pixel write routine
0200 LET V=41348 : REM location of vector generator routine
0300 CALL( I,0)
0305 FOR Y=0 TO 300 :REM scribble/scrabble
0310 POKE( X2,255*RND(0)):POKE(Y2,255*RND(0))
0320 CALL( V,0)
0330 NEXT Y
0340 CALL( E,0)
0350 POKE( C,0)
0360 FOR Y=0 TO 400
0370 POKE( X2,255*RND(0)):POKE(Y2,255*RND(0))
0380 CALL( V,0)
0390 NEXT Y
0400 END
```

Demonstration program in BASIC.

```
P
S11301004FC67FD7419740BD013CBDA1007E02E2AE
S1130110D6439642DB419940D702D6459644DB410B
S11301209940D703D6479646DB419940D704D64930
S11301309648DB419940D705BDA18439CE004CBD1A
S113014003E33736860BC6A3373630A602E603BD73
S1130150036531313131C0058200D74B974ACE0057
S11301604CBD03E33736860BC6A3373630A602E60A
S113017003BD036531313131C0058200D74F974E3D
S1130180CE004CBD03E33736860BC6A3373630A604
S1130190002E603BD036531313131C0058200D75118
S11301A09750CE004CBD03E33736860BC6A33736D3
S11301B030A602E603BD036531313131C00582004A
S11301C0D7539752CE004CBD03E3C4208400D7001C
S11301D039D6439642DB4B994AD0419240D7439754
S11301E042D6459644DB519950D0419240D7459729
S11301F044D6479646DB4F994ED0419240D7479715
S1130200046D6499648DB539952D0419240D74997F4
S113021048D6459644405082O0D7459744D64996DF
S1130220484050820OD7499748BD0110D6439642B2
S113023040508200D7439742D647964640508200AA
S1130240D7479746BD0110D6459644405082O0D703
S1130250459744D6499648405082O0D7499748BDAF
S1130260011OD643964240508200D7439742D64766
S11302709646405082O0D7479746BD0110CE004CA9
S1130280BD03E337368605C61E373630A602E603BD
S1130290BD036531313131C005820026065D260378
S11302A0BD013CCE004CBD03E3C0C882002C037EDC
S11302B002B57E01D1BDA127D6004FC02082002601
S11302C0065D26037E02D6D6004FC00082002606B5
S11302D05D26037E02DD4F5FD7007E02E24FC6201B
S11302E0D700CE004CBD03E337368601C60437364B
S11302F030A602E603BD036531313131CB018900FB
S1130300D7439742CE004CBD03E337368601C6047B
S1130310373630A602E603BD036531313131CB01F6
S11303208900D7479746CE004CBD03E33736860194
S1130330C604373630A602E603BD036531313131D8
S1130340D7459744CE004CBD03E337368601C60437
S1130350373630A602E603BD036531313131D74962
S113036097487E022C3736E601375FA6002A075CE1
S11303703040600082003637343OE603260D4D26C7
S11303800ADE122755C621D7146E006D042A0A60AE
S1130390046005240264046C0186016D022B0B4C77
S11303A0680369022B04811126F5A700A604E6055B
S11303B06F046F05E003A2022407EB03A9020C20DB
S11303C0010D690569046402660364A0026E6A60451
S11303D0E6056601240440508200313131313167
S11303E0393C0CA60148AB00E60158495849EB01D9
S11003F0A900CB198936A700E7014456394E
$
```

Demonstration program in machine language. MIKBUG-formatted dump of a program which will produce a beautiful high-speed kaleidoscopic display, which will run indefinitely. Perform a jump to location $0100 to start the demonstration. The graphics driver in the article and ORGed at $A100 must also be present.

The DOT subroutine turns a particular pixel either on or off, depending on the status of bit 5 of the byte in the COLOR register. This routine requires about 45 machine cycles or about 35 us per dot on a 1.3 MHz computer. Before this routine is called, the pixel coordinates must be loaded into the X1 and X2 registers.


The vector generator routine is one of the most important subroutines in a graphics driver package. For maximum effectiveness, it must be capable of the highest operating speed. A general-purpose routine must be able to draw a line between any two arbitrary points within the display area. VECTOR is optimized to do this without using time-consuming multiplication or division steps. This routine draws a best-fit straight line between the current cursor position (X1,Y1) and the point addressed by registers X2 and Y2.

For highest-speed operation in a true vector plotting mode, the cursor is automatically updated to the current address stored in (X2,Y2) during execution. This means that in order to draw a series of connected line segments you need only to consecutively feed the last end point of each segment to (X2,Y2) before each call to VECTOR. This routine recognizes a vertical or horizontal line and ignores the slope calculations for highest-speed operation in these special cases.

There is, on the average, a 100 cycle set-up and exit overhead involved with each call to this subroutine. An additional 70 machine cycles per pixel is required by VECTOR to construct a typical sloping line segment. This means that less than 14 ms is required to draw a 256 pixel sloping line segment on a 1.3 MHz CPU. This is more than 100 times faster than the Electric Crayon operating under the EGOS operating system in its 256 × 192 (highest) resolution single color mode.

The short demonstration programs which follow the controller software were written in Computerware's random BASIC Ver. 5.10, to show off the graphics commands. PEEK, POKE and CALL statements were used to communicate with the controller software. Although the J variable in Computerware's CALL (I,J) statement is available for use in the A accumulator when execution of the machine-language program begins, use of this transfer was not made to keep the controller software universal. ■

Super Compuprism Color Graphics



For the S-100 Bus. 32K of on board memory allows a 288 H. x 192V. dot matrix, for a total of 55,296 pixels. Every pixel is programable in any one of 16 colors or 16 grey levels completely independent of all other pixels in the matrix.

Compuprism Bare Board with documentation $45, kit $240, ass. and tested $280. (16K Memory 144H. x 192V.)

Super Compuprism Bare Board with documentation $50, kit $350, ass. and tested $395. (32K Memory 288H. x 192V.)

Add $15 to A & T price for 16 level grey scale.
Add $15 to A & T price for memory management port.

Compuprism software package, includes alpa-numberics, point plot, line draw, and TRS-80* graphics simulation $20 or FREE with A & T unit.

Z-80 Users You Can Use TRS-80* Software

We offer an assembled hardware interface which we guarantee will load data from TRS-80* cassettes into any Z-80 based system. (Except sealed units.) The documentation explains how to patch the TRS-80* software to your system. In fact you can virtually change your Z-80 machine into a TRS-80* without making a single hardware change. The documentation also includes an example of patching SARGON II** into a Z-80 system.

The price is $30 or FREE with the purchase of an assembled compuprism or super compuprism unit.

A-D, D-A Board

S-100 board provides 16 channels of analog to digital input and 8 channels of digital to analog output. With on board kluge area. Total cost of board and parts less than $120. Bare board with documentation $45.

ALL COD ORDERS SHIPPED WITHIN 72 HOURS. 4MHz MOD FOR S.D. SYSTEMS. EXPANDORAM $10.

J.E.S. GRAPHICS, P.O. Box 2752
Tulsa, OK 74101, (918) 742-7104

TRS-80* is a trademark of Tandy Corp.
SARGON II** is a trademark of Hayden Book Co.

↙180

COMPUTER EQUIPMENT & SOFTWARE BARGAINS



EVERY MONTH

BUY, SELL OR TRADE ALL TYPES OF COMPUTER EQUIPMENT AND SOFTWARE (pre-owned and new) among 20,000 readers nationwide.

FEATURES:

- Low classified ad rates - 10¢ a word
- Hundreds of ads from individuals
- Categorized ads so you can find them instantly
- Large (11 by 14") easy to read pages

Subscribe now for $10 and receive 13 issues/year (one FREE plus 12 regular issues). After receiving your first issue if you're not completely satisfied you may have a 100% refund and you still keep the first issue free. Bank cards accepted.

BONUS: *If you have something to advertise (pre-owned or software) send in a classified ad with your subscription and we'll run it FREE.*


The Nationwide Marketplace for Computer Equipment
COMPUTER SHOPPER ↙36
P.O. BOX F 21 • TITUSVILLE, FL 32780 • 305-269-3211

MasterCard & VISA subscriptions only, call **TOLL FREE 1-800-528-6050 EX. 184**

Why Do Professionals Prefer


BECAUSE

• Unique software • Technical support • Quick delivery • Established company • Release 2 CP/M[1] (some packages under UNIX[4] and TRSDOS[5]) • Quality software • In-house expertise • Fast response • User orientation • Competitive prices • Customer service • Verbatim[6] media • Onyx hardware (CP/M and UNIX versions)

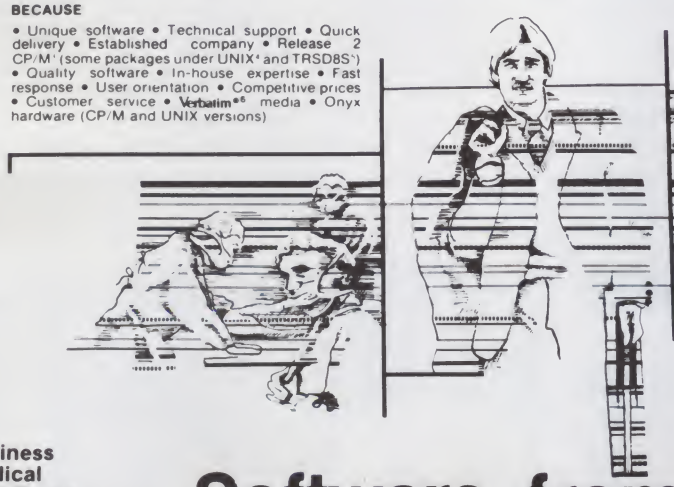

BECAUSE

Unique swift routing cybernetics response system gives you no-nonsense technical answers that save you time. Call: (714) 848-1922

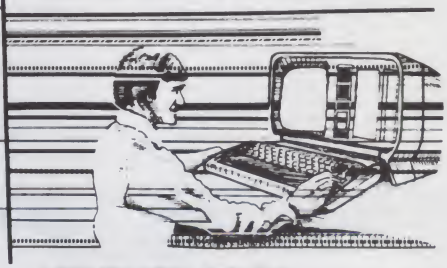

• ***NEW*** **RM/COBOL[1] applications:**
• Order Entry/Inventory • Receivables • Payables • General Ledger • Financial Modeling • Client Accounting—and more on the way!
• ***NEW*** **CBASIC2[2] applications:**
• REAP (Real Estate Acquisition Package).

Communication Arts, Huntington Beach, Ca

Business
Medical
Real Estate
Computer Systems

Software from Cybernetics?

RM/COBOL—The new standard for microcomputer COBOL!! The only COBOL for CP/M (also on TRSDOS & UNIX) with alternate keys (multi-key ISAM), CRT screen handling, interactive debug, and the most useful Level 2 features. Compatible with RSCOBOL[5]—but runs faster.

TRS-80[5], Model II CP/M—The fastest Mod II CP/M with the most features. Outstanding teaching documentation for newcomers to CP/M, multiple CRT emulation, down loading package, support for CORVUS 10 Mb hard disk. Many additional user-oriented features.

Plus existing CBASIC2 packages
APH (Automated Patient History)
Osborne & Assoc —Payroll • Payables/Receivables • General Ledger
NAD[7] (Name and Address)
PMS (Property Management System)
Inquire for details

And system software packages
MAGIC WAND[8] Editing/Word Processing
CBASIC2 Compiler BASIC
QSORT[9] Soft Merge Package

Distributed in U.K. by
Microcomputer Applications Ltd
11, Riverside Court, Caversham, Reading, England
TEL (0734) 470425

CYBERNETICS INC
8041 Newman Ave., Suite 208
Huntington Beach, CA 92647
(714) 848-1922

Trademarks of [1]Ryan-McFarland Corp., [2]Compiler Systems, Inc., [3]Digital Research, [4]Bell Telephone Laboratories, Inc., [5]Tandy Corp., [6]Verbatim, Inc., Cybernetics, Inc., [7]Structured Systems Group, Inc., [8]Small Business Applications, Inc

↙See List of Advertisers on page 194

This hardware/software combination from Micro Technology Unlimited teams up to deliver a knockout high-resolution graphics display.

A One-Two Punch For CBM/PET Graphics

By J. W. Froelich

The CBM/PET series of computers has been limited in the past by an inadequate graphics display. The 40 × 24 raster of high resolution 80 × 48 point plotting is unacceptable for graphics, data plotting or illustrations. To offset this deficiency, Micro Technology Unlimited (MTU, Box 12106, Raleigh, NC 27605) has developed a high-resolution graphics display which yields a 320 wide by 200 high dot matrix display and a software package which makes full use of the graphics board.

Both the hardware—Integrated Visible Memory Board (IVMB)—and the software—Keyword Graphics Package (KGP)—must be presented together, since they are truly complementary.

Address correspondence to J. W. Froelich, 9 Brown Place, Woburn, MA 01801.


The Integrated Visible Memory Board (IVMB)


The IVMB board contains 8K of memory divided into two 4K blocks and composes the 320 × 200 dot matrix. The board has jumpers that let you select the address of the two 4K memory blocks. The board comes factory-configured for locations $9000 through $AFFF, space not typically used by the CBM computer. Reconfiguring the board for other locations is simple since the jumpers are staple-shaped wires that plug into DIP sockets, and are thus easily moved.

The 8K of memory is used in a dual-port configuration, similar to the PET's on-board screen memory. The matrix memory looks like ordinary memory to the computer, but there is additional circuitry on the IVMB to generate video output.

IVMB controls the video screen by routing the video output from the main computer board through the IVMB, and a software register controls which video signal (IVMB or CBM) goes to the screen (Fig. 1).

The IVMB contains five ROM sockets that have jumpers to select their memory locations. A software-

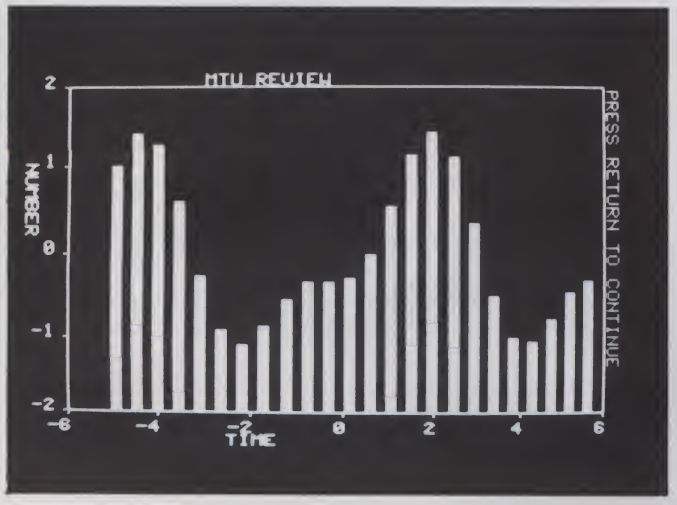

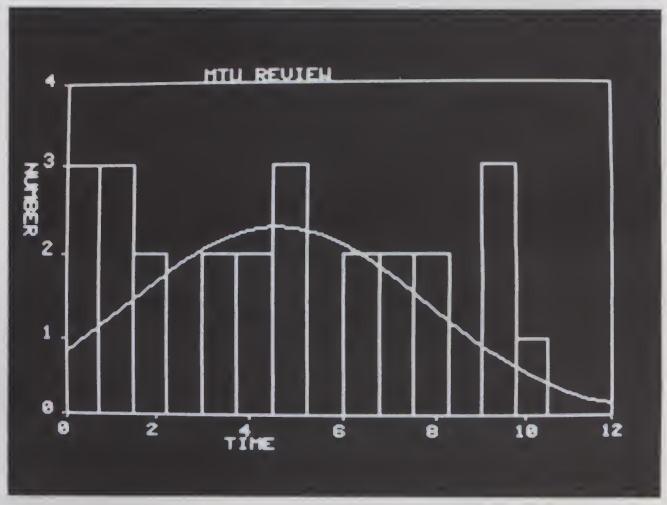

Photos 1a and b. Statistical data drawn on the IVMB by the program SLIDE.

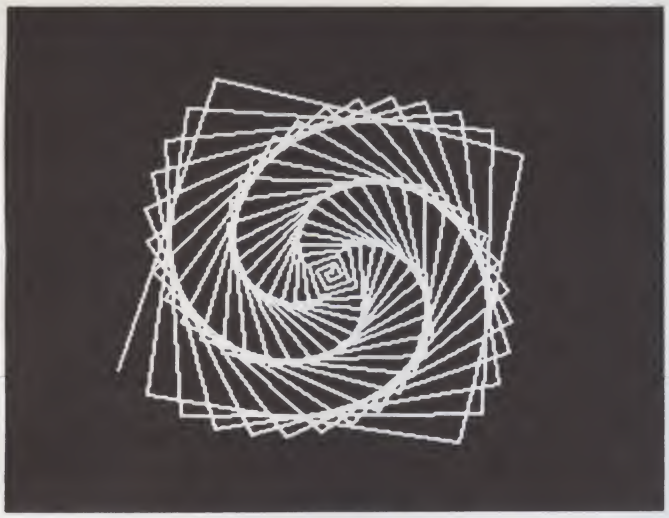


Photo 2. Example of 3-D graphics.

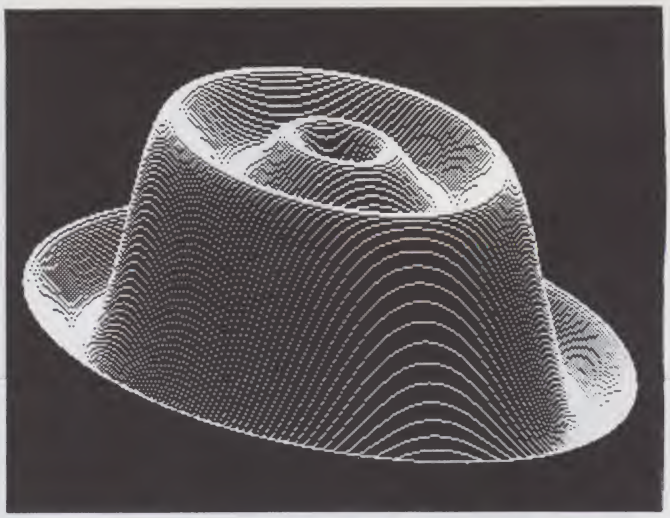


Photo 3. An Archimedes Spiral.

controlled register allows selection of any or all the sockets. This lets you use multiple ROMs that reside at the same memory location; for instance, Wordpro and Toolkit ROMs can all reside at the same memory locations and be software-selected.

A light pen register is present on the board. This register works by trapping the raster scan pointer within two eight-bit registers which represent the most- and least-significant bits of its address within the IVMB memory. The board also contains buffers and decoding circuitry that allow expansion through the KIM bus. MTU sells a card cage with five expansion slots for this purpose. Jumpers are also present to modify decoding of addresses on the expansion bus. Boards that can be added include the CODOS disk system and expansion memory.

Programming

Programming of the board can be performed by peeking and poking to the memory and registers, but this is cumbersome. The best way of controlling the IVMB is through the use of the Keyword Graphics Package.

IVMB comes pretested by MTU. The board has been jumpered for the most common CBM configuration, but a table has been provided for other configurations. Reconfiguring seldom requires moving more than four jumpers.

IVMB connects to the computer board through a 60-line cable to the expansion connector. Wires are soldered to the unregulated power terminals on the CBM board. The unregulated power is also routed through the KIM bus for the expansion boards. The video signal from the main circuit board and the signal to the screen are routed through the IVMB. Standard connectors are provided so that the original wires need not be changed.

If expansion beyond the IVMB is not desired, then the board can be mounted under the CBM cover. Installing and testing the board should take less than one hour.

Keyboard Graphics Package

The Keyboard Graphics Package (KGP) is an 8K memory of assembly-language subroutines that are callable from BASIC. The package resides in the upper 8K of user RAM and therefore requires a minimum of 16K RAM within the computer. This would allow 8K programs, so if larger programs are desired a 32K machine is necessary.

The loading of the program requires first altering the size of program memory by poking new values into the memory size register. After this is done the program is loaded into high memory, above the designated user memory. The routines are then linked to the BASIC monitor via an SYS call. The routines modify the monitor so that all lines of commands or program are routed through KGP. Thus, in-text graphic commands are valid.

KGP contains over 45 commands. There are too many to describe here, so an overview of the most important commands follows.

The software contains sophisticated character commands that can write single characters or strings of characters on the screen. Two modes of character display are provided: one truncates characters if they extend off the screen, and the other will automatically wrap around and scroll. Character size, as well as rotation of the character in 90-degree increments, can be determined by a single command. The scrolling commands are very powerful and allow moving all or portions of the screen at will, thus letting you write a bidirectional editor or a moving window, as in animation.

KGP allows the screen to be divided into a maximum of four viewing windows, which are useful for split-screen functions. Each window can be handled like a different screen. When using characters within a window, the scrolling and wrap-around

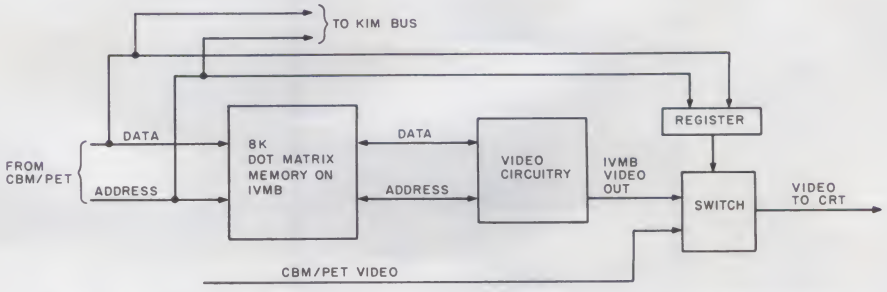


Fig. 1. Schematic drawing of the functional aspects of the Integrated Visible Memory Board.

routines function within the subscreens. Commands are available to move the cursor, draw or erase individual points, draw or erase lines and draw dotted lines. Coordinate transformation is also available to simplify programming.



Photo 4. Integrated Visible Memory Board.

An innovative function is that of user-defined characters and figures. You can store up to 255 predefined shapes, each of which can be recalled by a given ID number and drawn anywhere on the screen. Characters are drawn at machine-language speed, thus allowing animation.

KGP has many more functions that enhance and expedite the basic task of symbol-drawing and presentation. The documentation for the software is good (not excellent) for the basic functions but more difficult to understand for the advanced functions. The documentation would be improved by adding more examples of programming tasks and/or problems.

Programming

The value of a good software package can only be determined through its use. All the photos within this article have been programmed and drawn on my PET/CBM. Photos 1a and b are from a converted program called SLIDE, which appeared in *Byte*. The conversion of SLIDE from the Compucolor computer to KGP was straightforward, and eased by the KGP commands, which seem more usable than those available on the Compucolor computer. Except for color selection, there appears to be a one-for-one command correspondence between KGP, Compucolor and Apple graphics packages.

Conclusion

KGP implemented on the Integrated Visible Memory Board is a good dot-matrix display for the CBM/PET series of computers, and other KIM-bus computers. The screen, when photographed with high-contrast films as used in this article, yields publication-quality images. I use the KGP primarily for the graphic display of statistics, and I've been pleased with the results.

The hardware and software combination can be bought complete and ready to install for $495. This may seem a bit much for the average hobbyist, but for specific applications this is quite reasonable. The combination is a good value for the scientific and technical user.■

MEMOREX DISKETTES & CARTRIDGES

for your computer or word processor

BUY THE BEST FOR LESS. Lowest prices. **WE WILL NOT BE UNDERSOLD!!** Buy any quantity. Call free (800) 235-4137 for prices and information.



PACIFIC EXCHANGES ↩274
100 Foothill Blvd.
San Luis Obispo, CA
93401. (In Cal. call
(805) 543-1037.)

AT LAST!

Mass production prices for high quality software. Buy direct and save 50%. Also available for CPM and HDOS.

DATA BASE MANAGER Mod I & III $69. $149 (48K). Mod-II $199
Maintain a data base and produce reports, all without user programming. Define file parameters and report formats on-line. Key random access, fast multi-key sort, field arithmetics, audit log, label. No time-consuming overlays. 500 happy users in one year. Mod-II and 48K versions have over 50 enhancements, including 40 fields maximum. "IDM-M2 is great!" - 80-US.

A/R Mod-I $69 Mod-II $149 Mod-III $69
Handles invoices, statements, aging, sales analysis, credit checking, forms input, and order entry. Unlike other accounts receivable programs, ours can be used by doctors, store managers, etc.

WORD PROCESSOR $49
Centers, justifies, indents, and numbers pages. Mod-I version features upper/lower case without hardware modification! File merge option available.

MAILING LIST Mod I & III $59. $79 (48K). Mod-II $99
The best! Compare and be selective. Includes forms input, 5-digit selection code, zip code extension, sort on any field, and multiple labels. Who else offers a report writer and merges with word processor?

INVENTORY Mod I & III $89. $109 (48K) Mod-II $149
Fast key random access. Reports include order info, performance summary, EOQ and user-specified reports. Many people have converted to our system! "Next to impossible to damage the file."

GL, A/R, A/P, PAYROLL Mod-II $129 each
Integrated accounting package. 100+ page manual. As opposed to Osborne's slow binary search and 64 column screen, we use fast ISAM and 80 columns. Dual disk and TRSDOS required.

L216 $59
A cassette package of 10 business programs for Level II 16 K systems. Includes word processor and data base manager. Poker game $19.

Most programs are on-line, interactive, random-access, bug-free, documented, and delivered on disks. Mod-I programs require 32K TRSDOS. We're #1 in business software—don't let our low price fool you! Ask for our free 20-page catalog if you're still not convinced. Compiled versions are available.

MICRO ARCHITECT, INC.
96 Dothan St., Arlington, MA 02174 ↩108

80 COLUMN GRAPHICS



The Integrated Visible Memory for the PET has now been redesigned for the new 12" screen 80 column and forthcoming 40 column PET computers from Commodore. Like earlier MTU units, the new K-1008-43 package mounts inside the PET case for total protection. To make the power and flexibility of the 320 by 200 bit mapped pixel graphics display easily accessible, we have designed the Keyword Graphic Program. This adds 45 graphics commands to Commodore BASIC. If you have been waiting for easy to use, high resolution graphics for your PET, isn't it time you called MTU?

K-1008-43M Manual only $10 (credited toward purchase)
k-1008-43 Complete ready to install package $495

Mastercharge and Visa accepted

Write or call today for our full line catalog describing all MTU 6502 products, including our high speed 8" Floppy Disk Controller for up to 4 megabytes of PET storage.

The image on the screen was created by the program below.

```
 10 VISMEM: CLEAR
 20 P=160: Q=100
 30 XP=144: XR=1.5*3.1415927
 40 YP=56: YR=1: ZP=64
 50 XF=XR/XP: YF=YP/YR: ZF=XR/ZP
 60 FOR ZI=-Q TO Q-1
 70 IF ZI<-ZP OR ZI>ZP GOTO 150
 80 ZT=ZI*XP/ZP: ZZ=ZI
 90 XL=INT(.5+SQR(XP*XP-ZT*ZT))
100 FOR XI=-XL TO XL
110 XT=SQR(XI*XI+ZT*ZT)*XF: XX=XI
120 YY=(SIN(XT)+.4*SIN(3*XT))*YF
130 GOSUB 170
140 NEXT XI
150 NEXT ZI
160 STOP
170 X1=XX+ZZ+P
180 Y1=YY-ZZ+Q
190 GMODE 1: MOVE X1,Y1: WRPIX
200 IF Y1=0 GOTO 220
210 GMODE 2: LINE X1,Y1-1,X1,0
220 RETURN
```

MTU

154

Micro Technology Unlimited
2806 Hillsborough Street
P.O. Box 12106
Raleigh, NC 27605. U.S.A.
(919) 833-1458

NOW 80 COLUMN PETS CAN HAVE MTU HIGH RESOLUTION GRAPHICS

Display text on your screen while using Apple's HIRES page-2 graphics.

Mix It Up On Your Apple

By R. Daniel Bishop

One of the Apple computer's attractive features is its high-resolution color graphics. The full-screen page-1 high-resolution graphics mode lets you display two colors besides black and white.

Alphanumeric text information can be included into the display with the POKE-16301,0 command. This command removes the bottom one-sixth of the graphics display and reveals in its place the bottom four lines of text material located in the buffer in text page-1. This type of display is referred to as the mixed graphics-plus-text mode, or simply the mixed mode. Using the mixed mode, you can include labels, instructions or descriptive text material with your graphics display.

In addition to the page-1 high-resolution graphics, systems with at least 24K of RAM memory can access a page-2 of high-resolution graphics. This page is displayed by using the HGR2 command, and its buffer area occupies RAM memory between 16K and 24K. This gives you a second high-resolution graphics display that can be stored and used independently of the first display, or that can be used in conjunction with the first page for special effects, such as animation.

The page-2 display is also used extensively with longer programs that require use of the 8K to 16K RAM area for the BASIC program itself. This is due to the fact that the 8K to 16K RAM area is the same memory used by page-1 of the high-resolution graphics; thus, long programs render page-1 unavailable.

The only drawback to using page-2 HIRES graphics, however, is that you no longer have simple use of the mixed-mode display. In the words of the *Applesoft Manual* (p. 88), in using the POKE-16301,0 command after the HGR2 command, "...the four lines of text are taken from page-2 of text, which is not easily accessible to the user."

But with a little effort, you can use the mixed mode for page-2 quite effectively. It then becomes possible to incorporate the mixed mode with page-2 HIRES graphics into your program with only a few short subroutines and some careful planning. The simple program provided here illustrates how.

The Mixed Mode

To understand the relationship between the HIRES graphics pages and the text pages, you must study the memory map shown in Table 1. Memory begins with page 0 and can be extended to page 255 in a 64K system. Each page in memory accounts for 256 bytes of memory storage. A single page of HIRES graphics memory requires 8192 bytes, or 32 pages of memory. Note that page-1 of HIRES graphics uses pages 32 through 63 of RAM, space that is easily required by a moderately long BASIC program, while page-2 of HIRES graphics occupies pages 64 to 95 of RAM.

Each page of text requires only 1024 bytes, or four pages, of memory. Text page-1 is located on pages 4–7 of memory, and text page-2 occupies pages 8 through 11. Here is where the root of the problem lies. The BASIC program code is stored in RAM beginning on page 8 of memory. An attempt to use a HIRES page-2 display in mixed mode, thus displaying four lines of text from text page-2, will result in the display of four lines of BASIC program code in the text window at the bottom of the screen.

When you are using HIRES page-1 in mixed mode, the procedure for printing text onto the screen in the text window is very simple. While in the HGR mode, a HOME command clears text page-1 with no visible effect on the video monitor. Then a POKE -16301,0 command will reveal the blank text window at the bottom of the display. The cursor is positioned in the text window with a VTAB=20, and a normal PRINT statement is used to display the line of text or desired variables in the window. The POKE command can come before the VTAB or after the PRINT statement, depending on the visual effect desired. To return to full screen graphics, use POKE -16302,0. To return to all text, a POKE -16303,0 or the TEXT command is used.

In the above process, the PRINT command can be thought of as poking the alphanumeric characters into the appropriate locations of *text* page-1. The same process must be used to get information to appear in the text window when using HIRES page-2 in mixed mode. However, the process is "not easily accessible to the user" because poking random information into memory occupied by the BASIC program will normally destroy the program. To avoid this disaster and at the same time make use of page-2 mixed mode, the following procedures must be followed:

1. The four areas of RAM used by the four lines of page-2 text must be protected by reserving this space

Address correspondence to R. Daniel Bishop, Custom Comp, Box 429, Buena Vista, CO 81211.

RAM pages	Use	Hex Location	Decimal Location
0–3	System buffers.	0000–03FF	0–1023
4–7	Text page-1; Video display buffer.	0400–07FF	1024–2047
8–11	Text page-2; User BASIC program storage begins here also.	0800–0BFF	2048–3071
12–31	User BASIC program storage.	0C00–1FFF	3072–8191
32–63	HIRES graphics page-1; User BASIC program storage.	2000–3FFF	8192–16383
64–95	HIRES graphics page-2; User BASIC program storage.	4000–5FFF	16384–24575
96–191	User BASIC program storage.	6000–BFFF	24576–49151
192–255	I/O and ROM.	C000–FFFF	49152–65535

Table 1. Apple memory map. Information for this table was obtained from the 1979 edition of the Apple Reference Manual, *p. 69. Notice that the user BASIC program storage area overlaps the RAM dedicated to text page-2.*

within the BASIC program itself.

2. Information to be printed into these text lines will be converted into string variables.

3. Each character in the string to be transferred into the text lines will be individually poked into its appropriate position.

To carry out step three, the appropriate Apple machine code must be assigned to each character. This gives you an easy way to use inverse or flashing characters along with your text for some dazzling displays.

This Space Reserved

The four lines of text which appear in the text window of a page-2 mixed-mode display are, unfortunately, *not* stored in contiguous areas of RAM. Each line is, of course, 40 bytes long, and their respective locations are presented in Table 2. The BASIC program must be restructured so that these areas appear within the quotation marks of a PRINT statement. In that way, the size of the reserved space can be predetermined and will not be altered during the execution of the program.

This ensures that each of the four reserved locations will always fall precisely where they are needed in RAM. These four PRINT statements, however, need never be executed. (REM statements may also be used, as long as they are followed by enough characters to ensure that the reserved area is covered.)

Now that the RAM locations for the reserved spaces are known (Table 2), the program must be carefully tailored to fit them in. This is done by entering the first 1200 bytes of BASIC code for the program and being sure that these parts of the program function perfectly. Once the reserved areas have been incorporated into the program, any change or modification to this part of the program might alter the byte count preceding the reserved areas and cause them to become relocated. It would then be necessary to go back and readjust each of these so that they again fall into the desired areas of RAM.

The BASIC program must now be examined in machine code using the monitor, accessed by CALL -151. What you must find is the BASIC program line number for the program line that runs through hex-0A4A in memory. You must place the PRINT statement directly before this program line and provide enough blanks between the quotes to push this program line past hex-0A78. This is done as follows:

1. Enter 0A00 and carefully scroll through the resulting memory dump by repeatedly pressing the return key. Remember that each program line is preceded by a hex-00 byte, that the first two bytes in a program line are the next-line pointer which gives the address where the next line will be found, and that the next pair of bytes displays the actual BASIC program line number (in hex, of course, with the low order byte before the high order byte). Also remember that it takes two characters to define a byte.

2. Look for a zero (00) as you scan through the machine code from 0A00, which signifies the end of one program line and the beginning of another. When you find a zero, look at the next two bytes which give the location of the next program line (reverse order). If those bytes are less than 0A4A, then proceed on to the next zero. As soon as you find a next-line pointer that points *beyond* 0A4A, you have found the BASIC program line that must be pushed back to make room for line one of reserved RAM. Analyze the second pair of bytes and convert them to a decimal number (remember to reserve their order). This will correspond to a BASIC program line number in your program.

3. Determine how many bytes you will have to reserve to get from this point in RAM to the end of the first line's reserved space, 0A78. Be sure to do your counting in hex! This value will correspond to the number of blank spaces to reserve between the quotation marks in the PRINT statement.

4. Return to BASIC command mode by pressing the break key, and insert your PRINT line along with the appropriate spaces immediately ahead of the program line identified in step 2.

5. Return to the monitor mode and scan from 0A50 to 0A78 to verify that all 40 bytes are filled with 20s, which is the hex equivalent of 32, which is the ASCII code for the space character.

6. Exactly the same procedure is followed for the remaining three reserved spaces. For the second line, you are looking for a next-line pointer that exceeds 0ACA; for the third, 0B4A; for the fourth, 0BCA. Use Table 2 to arrive at your byte count and

Mixed-mode Text Line	Hex Location	Decimal Location
Line one	0A50–0A77	2640–2679
Line two	0AD0–0AF7	2768–2807
Line three	0B50–0B77	2896–2935
Line four	0BD0–0BF7	3024–3063

Table 2. Areas in text page-2 that will be displayed when high-resolution graphics page-2 is used in mixed mode. The decimal location ranges for each of the four lines give the permissible values for the variable FY, which is used by the POKE subroutine.

SUPERBRAIN
By INTERTEC



64K Double or Quad Density units available. Uses two Z-80 CPU's. Commercial-type terminal with 12" monitor. Dual double density minifloppies. Over 350 kilobytes of storage (twice that with quad density drives). Two serial RS232 ports, I/O ports standard. Expandable with optional S-100 interface. Comes with CP/M™ 2.2 operating system. MiniMicroMart can supply a wide range of CP/M development and application software.

w/64K Double Density, List $3495 . . **$2869**
w/64K Quad Density, List $3995. . . . . **$3395**



HEWLETT PACKARD
HP-41CV
AVAILABLE NOW!
$259.

ZENITH | data systems
Z19 Video Terminal



Limited Time
$799
List $995

HEWLETT PACKARD **HP-85A**
Desk-Top Computer
List $3250
$2749



HP-83
List $2250 **$1895**

F.O.B. shipping point. All prices subject to change and all offers subject to withdrawal without notice. Advertised prices are for prepaid orders. Credit card and C.O.D. 2% higher. C.O.D. may require deposit.

— WRITE FOR FREE CATALOG — ↙304

MiniMicroMart
1618 James Street
Syracuse, NY 13203 (315) 422-4467

```
 94 J=LEN(AZ$)
 96 IF FY<2688 THEN JJ=2688-FY: GOTO 101
 97 IF FY<2808 THEN JJ=2808-FY: GOTO 101
 99 IF FY<2936 THEN JJ=2936-FY: GOTO 101
100 JJ=3064-FY
101 IF J>JJ THEN J=JJ
105 FOR I=1 TO J
107     FX=0
108     Z$=MID$(AZ$,I,1)
110     IF ASC(Z$)<64 THEN FX=64
112      POKE FY, ASC(Z$)+FZ+FX
115     FY=FY+1
120 NEXTI
125 RETURN
```

Listing 1. The POKE subroutine which pokes the characters contained in AZ$ into the page-2 text window. Lines 96–100 check the length of AZ$ to be sure that there is enough room left on the line for the entire string to be poked. If the string is too long, it is truncated (line 100).

to verify that the appropriate spaces have been set aside.

In your BASIC program, you now have four new lines. Each is a PRINT statement that reserves one line in text page-2 to be used with HIRES page-2 in mixed mode. There is still one remaining nuisance to be worked out. Whenever you run the program, machine code will be poked into the reserved memory locations. If you then end the program and list it, all sorts of mysterious coding will appear in the PRINT statements. To keep everything tidy, the following line should be incorporated just before the END statement.

```
FORI=0TO39:POKE2640+I,32:POKE2768+I,
32:POKE2896+I,32:POKE3024+I,32:NEXTI
```

This will restore the listing to its original pristine condition.

An example may be helpful. Suppose that you are in the monitor mode looking for 00 in the memory dump. You may find a zero byte at location 0A1F. The next two bytes are 3A 0A, which, when reversed, become 0A3A. This is not larger than 0A4A so you proceed with the dump. The next 00 comes up at 0A39 (of course). The following two bytes are 4D 0A. This is larger (as 0A4D) than 0A4A, so this is the line you are after.

The next two bytes are C2 01. Reversing the order, we have 01C2, and converting this to decimal gives us 450, which is our BASIC program line number. Now if you put a PRINT statement at 0A3A, you will need 0A78–0A3A, or 3E bytes of blanks; that is, you will need to insert 62 blanks between the quotation marks (actually, four less, but it helps to leave a little room for error). After returning to BASIC command mode, you type in line 449 PRINT"...62 blanks..." and you have your first reserved space inserted into the program.

The POKE Subroutine

Now that the necessary memory spaces have been reserved for the text page-2 window display, all that remains is to poke the information to be displayed into that window. The simple subroutine presented in Listing 1 does this very nicely. Furthermore, it lets you choose whether a particular portion of the display will be in normal, inverse or flashing mode simply by proper choice of values for the variable FZ. Table 3 lists the values that FZ may take to achieve different display modes.

Before calling the subroutine, you must specify where in the text window you want the information to appear and assign this number to FY. FY must fall within the four decimal ranges given in Table 2. The next step is to convert the character information into a string, AZ$. Numeric information must first be converted to string variables using the STR$ function before being assigned to AZ$. To achieve the desired effect, you may wish to separate all numeric and special characters from the alphabetic characters and access the subroutine several times consecutively with different values of FZ.

Finally, you determine which display mode you wish to use for the characters in AZ$ and, using Table 3, assign the appropriate value to FZ. (Of course, if FZ has been previously defined with the desired value, it is not necessary to redefine it. Similarly, FY increments during the subroutine, and if new information is to be placed on the same line and directly following the last entry, FY will already have the desired value and needn't be redefined.)

Lines 96 through 101 in the subroutine (Listing 1) are optional. If you can be sure that the data you are poking will not exceed the length of the line

NEW! TPM* for TRS-80 Model II
NEW! System/6 Package
Computer Design Labs

Z80* Disk Software

We have acquired the rights to all TDL software (& hardware). TDL software has long had the reputation of being the best in the industry. Computer Design Labs will continue to maintain, evolve and add to this superior line of quality software.
— Carl Galletti and Roger Amidon, owners.

Software with Manual/Manual Alone

All of the software below is available on any of the following media for operation with a Z80 CPU using the CP/M* or similar type disk operating system (such as our own TPM*).

for TRS-80* CP/M (Model I or II)
for 8" CP/M (soft sectored single density)
for 5¼" CP/M (soft sectored single density)
for 5¼" North Star CP/M (single density)
for 5¼" North Star CP/M (double density)

BASIC I

A powerful and fast Z80 Basic interpreter with EDIT, RENUMBER, TRACE, PRINT USING, assembly language subroutine CALL, LOADGO for "chaining", COPY to move text, EXCHANGE, KILL, LINE INPUT, error intercept, sequential file handling in both ASCII and binary formats, and much, much more. It runs in a little over 12 K. An excellent choice for games since the precision was limited to 7 digits in order to make it one of the fastest around. $49.95/$15.

BASIC II

Basic I but with 12 digit precision to make its power available to the business world with only a slight sacrifice in speed. Still runs faster than most other Basics (even those with much less precision). $99.95/$15.

BUSINESS BASIC

The most powerful Basic for business applications. It adds to Basic II with random or sequential disk files in either fixed or variable record lengths, simultaneous access to multiple disk files, PRIVACY command to prohibit user access to source code, global editing, added math functions, and disk file maintenance capability without leaving Basic (list, rename, or delete). $179.95/$25.

ZEDIT

A character oriented text editor with 26 commands and "macro" capability for stringing multiple commands together. Included are a complete array of character move, add, delete, and display function. $49.95./$15.

ZTEL

Z80 Text Editing Language - Not just a text editor. Actually a language which allows you to edit text and also write, save, and recall programs which manipulate text. Commands include conditional branching, subroutine calls, iteration, block move, expression evaluation, and much more. Contains 36 value registers and 10 text registers. Be creative! Manipulate text with commands you write using Ztel. $79.95/$25.

TOP

A Z80 Text Output Processor which will do text formatting for manuals, documents, and other word *processing jobs. Works with* any text editor. Does justification, page numbering and headings, spacing, centering, and much more! $79.95/$25.

MACRO I

A macro assembler which will generate relocateable or absolute code for the 8080 or Z80 using standard Intel mnemonics plus TDL/Z80 extensions. Functions include 14 conditionals, 16 listing controls, 54 pseudo-ops, 11 arithmetic/logical operations, local and global symbols, chaining files, linking capability with optional linker, and recursive/reiterative macros. This assembler is so powerful you'll think it is doing all the work for you. It actually makes assembly language programming much less of an effort and more creative. $79.95/$20.

MACRO II

Expands upon Macro I's linking capability (which is useful but somewhat limited) thereby being able to take full advantage of the optional Linker. Also a time and date function has been added and the listing capability improved. $99.95/$25.

LINKER

How many times have you written the same subroutine in each new program? Top notch professional programmers compile a library of these subroutines and use a Linker to tie them *together* at assembly time. Development time is thus drastically reduced and becomes comparable to writing in a high level language but with all the speed of assembly language. So, get the new CDL Linker and start writing programs in a fraction of the time it took before. Linker is compatible with Macro I & II as well as TDL/Xitan assemblers version 2.0 or later. $79.95/$20.

DEBUG I

Many programmers give up on writing in assembly language even though they know their programs would be faster and more powerful. To them assembly language seems difficult to understand and follow, as well as being a nightmare to debug. Well, not with proper tools like Debug I. With Debug I you can easily follow the flow of any Z80 or 8080 program. Trace the program one step at a time or 10 steps or whatever you like. At each step you will be able to see the instruction executed and what it did. If desired, modifications can then be made before continuing. It's all under your control. You can even skip displaying a subroutine call and up to seven breakpoints can be set during execution. Use of Debug I can pay for itself many times over by saving you valuable debugging time. $79.95/$20.

DEBUG II

This is an expanded debugger which has all of the features of Debug I plus many more. You can "trap" (i.e. trace a program until a set of register, flag, and/or memory conditions occur). Also, instructions may be entered and executed immediately. This makes it easy to learn new instructions by examining registers/memory before and after. And a RADIX function allows changing between ASCII, binary, decimal, hex, octal, signed decimal, or split octal. All these features and more add up to give you a very powerful development tool. Both Debug I and II must run on a Z80 but will debug both Z80 and 8080 code. $99.95/$20.

ZAPPLE

A Z80 executive and debug monitor. Capable of search, ASCII put and display, read and write to I/O ports, hex math, breakpoint, execute, move, fill, display, read and write :n Intel or binary format tape, and more! on disk

APPLE

8080 version of Zapple

NEW! TPM now available for TRS-80 Model II!

TPM*

A NEW Z80 disk operation system! This is not CP/M*. It's better! You can still run any program which runs with CP/M* but unlike CP/M* this operating system was written specifically for the Z80* and takes full advantage of its extra powerful instruction set. In other words its not warmed over 8080 code! Available for TRS-80* (Model I or II). Tarbell, Xitan DDDC, SD Sales "VERSA-FLOPPY", North Star (SD&DD), and Digital (Micro) Systems. $79.95/$25.

SYSTEM MONITOR BOARD (SMB II)

A complete I/O board for S-100 systems. 2 serial ports, 2 parallel ports, 1200/2400 baud cassette tape interface, sockets for 2K of RAM, 3-2708/2716 EPROM's or ROM, jump on reset circuitry. Bare board $49.95/$20.

ROM FOR SMB II

2KX8 masked ROM of Zapple monitor. Includes source listing $34.95/$15.

PAYROLL (source code only)

The Osborne package. Requires C Basic 2.
5" disks $124.95 (manual not included)
8" disks $ 99.95 (manual not included)
Manual $20.00

ACCOUNTS PAYABLE/RECEIVABLE (source code only)

By Osborne, Requires C Basic 2
5" disks $124.95 (manual not included)
8" $99.95 (manual not included)
Manual $20.00

GENERAL LEDGER (source code only)


By Osborne. Requires C Basic 2
5" disks $99.95 (manual not included)
8" disks $99.95 (manual not included)
Manual $20.00

C BASIC 2

Required for Osborne software. $99.95/$20.

SYSTEM/6

TPM with utilities, Basic I interpreter, Basic E compiler, Macro I assembler, Debug I debugger, and ZEDIT text editor.
Above purchased separately costs $339.75
Special introductory offer: Only $179.75 with coupon!!

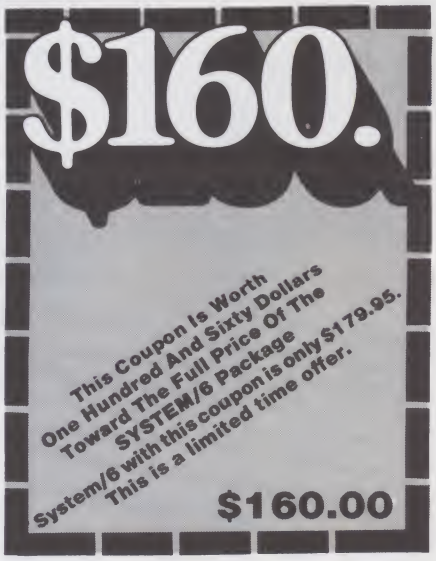

ORDERING INFORMATION

Visa, Master Charge and C.O.D. O.K. To order call or write with the following information.

1. Name of Product (e.g. Macro I)
2. Media (e.g. 8" CP/M)
3. Price and method of payment (e.g. C.O.D.) include credit card info. if applicable.
4. Name, Address and Phone number.
5. For TPM orders only: Indicate if for TRS 80, Tarbell, Xitan DDDC, SD Sales (5¼" or 8"), ICOM (5¼" or 8"), North Star (single or double density) or Digital (Micro) Systems.
6. N.J. residents add 5% sales tax.

Manual cost applicable against price of subsequent software purchase in any item except for the Osborne software.

For information and tech queries call
609-599-2146

For phone orders ONLY call toll free
1-800-327-9191
Ext. 676
(Except Florida)

OEMS

Many CDL products are available for licensing to OEMs. Write to Carl Galletti with your requirements.

* Z80 is a trademark of Zilog
* TRS-80 is a trademark for Radio Shack
* TPM is a trademark of Computer Design Labs. It is not CP/M*
* CP/M is a trademark of Digital Research

Prices and specifications subject to change without notice.

DEALER INQUIRIES INVITED.

COMPUTER DESIGN LABS

342 Columbus Avenue
Trenton, N.J. 08629

↙ 18

↙ See List of Advertisers on page 194

— Professional —
Real Estate Software
For Apple or TRS-80
Property Management System
(32K, 1 Disk Systems)

Features:

- Tenant Information
- Late Rent Reports
- YTD & Monthly Income
- Handles — Partial Payments, Returned Checks, Advance Payments
- Prints Receipts
- 5 Digit Expense Accounts
- Building Expense Report
- Vendor Expense Report
- Income Tax Report
- All Reports Can Be Printed
- Complete Documentation
- Easy Data Entry & Edit
- 200 Units per File

Price $225.00

Real Estate Analysis Modules:
(Cassette or Disk)

1) Home Purchase Analysis
2) Tax Deferred Exchange
3) Construction Cost/Profit
4) Income Property Cashflow
5) APR Loan Analysis
6) Property Sales Analysis
7) Loan Amortization

$35 Per Module

At Computer Stores Everywhere
Or Order COD Direct
(Cal Residents Add 6% Sales Tax)
(213) 372-9419

Real Estate Software Company™
Dept. K 1116 F Eighth St. Manhattan Beach, CA 90266

Dysan CORPORATION

Solve your disc problems, buy 100% surface tested Dysan diskettes. All orders shipped from stock, within 24 hours. Call toll FREE (800) 235-4137 for prices and information. Visa and Master Card accepted. All orders sent postage paid.



PACIFIC EXCHANGES
100 Foothill Blvd
San Luis Obispo, CA
93401 (In Cal call
(805) 543-1037)

✓246

Value For FZ	Resulting Display Mode
128	NORMAL
0	FLASHING
−64	INVERSE

Table 3. Values that must be assigned to FZ in order to achieve a desired display mode for a given character type. The ASCII value for the specific character is incremented (or decremented) by the value of FZ to arrive at the machine code which corresponds to the desired display mode.

remaining for it, then these lines can be omitted.

A very important word of caution is in order here. Whenever you are writing a program that modifies its own code by poking data into the program, always save a copy of the latest version on tape or diskette *before* testing or running the program. Failure to do this could result in total loss of your program if a slight oversight or error has been made in the POKE locations.

Flower Garden—A Demonstration Program

The short program in Listing 2 demonstrates the approach outlined above for obtaining mixed-mode graphics-plus-text display while using page-2 of high-resolution graphics. It illustrates not only the display of static data, but also of variables and of interactive keyboard response information.

Compare lines 94 through 125 of the two listings. It just happened that the required reserved space in this program fell in the memory used for the POKE subroutine itself. So you see lines 95, 98, 104 and 109 embedded within the subroutine. This may occasionally present a problem, although the only unexpected result in this program is a random control-G (bell) when these PRINT statements are actually executed. An alternative might be to add a couple more PRINT statements between those shown and essentially cordon off the whole block of RAM from hex-0A4A through 0BF8, using a GOTO statement to jump around the PRINT commands. The principle is, of course, the same.

When typing the code for this program into the computer, be absolutely sure that the code is duplicated exactly, at least through line 109. This includes the remarks and all blank spaces. For convenience, each large blank PRINT statement is accompanied by a remark specifying the number of blanks contained between the quotation marks.

Line 16 in Listing 2 is a blank PRINT buffer, which comes in handy in relocating the positions of the reserved areas if you must alter any of the code between lines 1 and 94. Adding extra blanks will push the reserved areas back into higher RAM; deleting blanks will pull them forward.

The main program lies between lines 1000 and 1265. After a brief introduction, a garden plot is drawn (subroutine 70) and you are asked to give a location (L) (a number between 0 and 24000) for your flower and

THE GREEN SCREEN THING
(The Green Thing is custom design to fit your TRS-80. It mounts in seconds without any tools.)



AVAILABLE For models I, II, and III as well as any standard 12 inch monitor.

List $7.95 (Add $1.00 for shipping & handling, and California residents add 6% sales tax)

FEATURES:

- Improved image contrast
- Reduces eye fatigue
- Enhances screen legibility
- Decreases glare
- Gives system a professional look

ORDER NOW
24 HOUR
PH 408-946-1265
VISA

AVS AUDIO - VIDEO SYSTEMS ✓192
2485 Autumnvale Dr. San Jose, CA. 95132

16K UPGRADE
$39.95

TRS80 — KEYBOARD
APPLE II
TRS8 III

TRS80 — EXP. INTERFACE
SORCERER
TANDY COLOR COMPUTER

FACTORY FRESH 200 ns 16K RAMS FOR MEMORY UPGRADE. KIT INCLUDES FULL INSTRUCTIONS AND COMPONENTS TO ALLOW EASY 16K CONVERSION IN MINUTES. WHY PAY DOUBLE FOR THE SAME PARTS THE MANUFACTURERS USE?

ALL PARTS CARRY A FULL 12 MONTH WARRANTY. ADD $2.00 POST AND PACKAGING; TEXAS RESIDENTS ADD 5% SALES TAX. CHECK OR MONEY ORDER ACCEPTED.

IAN ELECTRONICS ✓209
P.O. BOX 14079
AUSTIN, TEXAS 78761

NO.1 UNBELIEVABLE OPPORTUNITY!

If You've Written a Topnotch Program-- We'd Like to Publish It!

Programs needed for BUSINESS/ OFFICE Applications:

WORD PROCESSING
PAYROLL/TAX CALCULATION
GENERAL LEDGER/AR-AP
ORDER ENTRY/INVENTORY

Start collecting your royalty checks soon! Write for our free Programmer's Kit today.

INSTANT SOFTWARE, INC.
Submissions Dept.
Peterborough, NH 03458 ✓75

whether the flower is to be small or large (SC and SC$). The plant's location in X,Y coordinates is then calculated from L in subroutine 50 and the flower is drawn into the garden plot from a simple shape table which was poked into RAM at the start of the program (subroutine 35). The graphics routine is found beginning at line 23.

Interactive keyboard response is handled by the subroutine between lines 199 and 265. N$ accumulates the successive keyboard entries. Another important variable here is FM. To prevent you from entering too much data, thus overflowing the reserved space and potentially crashing the program, FM is assigned the maximum value FY may have for the specific line being used (see Table 2). When FY has been incremented to this value, further input is impossible.

Another use for FM is for single key entry for responses such as "Y/N". If FM is less than FY when the subroutine is called, only one key-in is allowed before a return is made to the main program. This is demonstrated with the "flower size?" and the "continue?" routines.

As mentioned earlier, before ending the program it is wise to tidy up the reserved space. This is done in this program with the subroutine beginning at line 300. Note that a variable FZ is used. At the program's conclusion, FZ is given a value of 32 to restore the blank spaces in the PRINT statements. However, any other valid number can be used as well, allowing this routine to be used to fill the text window with any desired character in any desired mode. Refer to page 15 of the *Apple Reference Manual* for the appropriate codes. An example is provided in this program by responding with a location that is larger than 24000.

Finally, I should repeat a warning that I stated earlier. Before testing the program out, do a CALL-151 and verify that the reserved regions are indeed filled with blanks (hex-20) and are in the required areas of RAM. Then save this copy of the program before typing RUN. At least then, should there be any problems, you won't have to begin coding from the beginning.■

Listing 2. Flower Garden program, which demonstrates the techniques of introducing text into the text window at the bottom of the screen in page-2 high-resolution graphics. The first 109 lines must be reproduced exactly, including remarks and blank spaces in order for the program to work properly.

```
1 REM  FLOWER GARDEN
2 REM  DEMONSTRATION
3 REM  OF HIRES-PAGE2
4 REM  GRAPHICS IN
5 REM  MIXED MODE
10 LOMEM:24600
14 REM BZ$ HAS TWENTY BLANK SPACES
15 BZ$="                    "
16 PRINT"                              ":REM 31 BLANKS
20 GOTO 1000


23 ROT=0
24 SCALE=SC
25 FOR I=1 TO 4
27 DRAW 1 AT X,Y
28 ROT=15*I
29 NEXTI
30 RETURN


35 POKE 232, 04
36 POKE 233, 96
40 DATA 1,0,4,0,46,46,46
41 DATA 44,44,36,39
42 DATA 39,55,55,55,00
45 FOR I=1 TO 16
46 READ A
47 POKE 24579+I, A
48 NEXT I
49 RETURN



50 Y=INT(L/200)
55 X=L-(200*Y)+39
60 Y=Y+20
65 RETURN


70 HCOLOR=1
75 HPLOT 37,19 TO 239,19 TO 239,140 TO 37,140 TO 37,19
80 RETURN


90 FOR I=1 TO 5000:NEXTI:RETURN
94 J=LEN(AZ$)
95 PRINT"
   ": REM 60 BLANK SPACES
96 IF FY(2680 THEN JJ=2680-FY: GOTO 101
```

More

CompuCover®



COVER YOUR INVESTMENT

- Cloth Backed Naugalhyde Vinyl
- Waterproof & Dustproof
- Longer Life
- Improved Reliability
- Two Decorator Colors— Saddle Tan and Black

APPLE COMPUTERS	
Apple Ensemble-covers entire Apple II with 9" video & two stacked disk	$15.95
Full Apple II	12.95
Apple II Keyboard	7.95
Apple II Disk	3.95
Apple II Disk (stacked-two disk)	7.95
Apple III	14.95
TRS-80 MODEL I	
Keyboard	$7.95
Cassette	4.95
Video Display	9.95*
Package Offer	18.95*
*NOTE–Add $3.00 for Expansion Interface	
TRS-80 5¼" Disk	$4.95
Two Disk Cover (side by side)	7.95
TRS-80 MODEL II	
Entire Unit	$22.95
Keyboard Only	7.95
Three Disk Unit (8" Drives)	18.95
TRS-80 MODEL III	
TRS-80 COLOR COMPUTER	9.95
Line Printer I	$16.95
Line Printer II	9.95
Line Printer III	15.95
Line Printer IV	9.95
Line Printer VI	14.95
Daisy Wheel Printer II	16.95
Quick Printer I	9.95
Quick Printer II	5.95
CBM-PET COMPUTERS	
CBM-Pet 2001-4001 series	$12.95
CBM-Pet 8032	12.95
CBM-Pet 2040, 8050 Disk	12.95
CBM-Pet 2022, 4022 Printer	9.95
CBM-Pet 2023 Printer	7.95
ATARI 800	$10.95
Atari 400	9.95
Atari 810 Disk	5.95
Atari 425 Printer	9.95
CROMEMCO SYSTEM THREE	$19.95
Cromemco 3100, 3102 CRT	18.95
Cromemco 3779 Printer	16.95
Cromemco 3703, 3704 Printer	18.95
Cromemco 3355 Printer	15.95
SUPERBRAIN	$19.95
Emulator	19.95
Intertube	19.95
Superstar	19.95
HEATH COMPANY	
H-19, H-89 CRT	$18.95
H-17, H-77 Disk	9.95
H-27, H-47 Disk	12.95
H-8, H-11 Computers	12.95
H-14 Printer	9.95
H-34, H-44K, H-44 RO	15.95
H-34, H-54	15.95
DIGITAL EQUIPMENT	
Data System Terminal	$19.95
Decscope Terminal	19.95
WT/78, VT/78 Terminal	19.95
VT-100 Terminal	16.95
Decprinter I	15.95
Decwriter II, III	18.95
Decwriter IV	15.95
OHIO SCIENTIFIC	
Superboard II	$12.95
CAP-DF, single case	14.95
CAP-DF, stacked	19.95
C2-single case	14.95
C2-stacked	19.95
C2-OEM, long case	19.95
C3-OEM, long case	19.95
C3-S1, single case	14.95
C3-S1, stacked	19.95
WANG COMPUTERS	
CRT Terminal	$18.95
2221 Printer	19.95
2221-W Printer	22.95
2231 Printer	19.95
2261 Printer	19.95
HEWLETT PACKARD	
85, 83 Computer	$14.95
7225A plotter	9.95
8290 IM disk	9.95
Plotter on disk outfit	12.95
Compucolor II Entire Unit	16.95
Compucolor II Keyboard	5.95
Vector Graphic MZ Computer	14.95
Vector Graphic Mindless Terminal	18.95
MINIMAX II TERMINAL	$18.95
Minimax II doubledisk	9.95
North Star Horizon	14.95
Sorcerer	9.95
Texas Instruments 99/4	9.95
Intercolor 3621	18.95
Poly Morphic System 8813 Computer	14.95
Poly Morphic Keyboard	7.95
Tano Outpost II	22.95
NEC Astra Computer	18.95
SOL 20 Computer	14.95
IMSAI 8080	14.95
CRT's	
Televideo TV1 912 or 920	$14.95
Hazeltine (one size fits all)	18.95
Soroc IQ 120	18.95
Adds Terminals 25, 100, 980, etc.	19.95
ADM-3	14.95
Leedex Video 100	9.95
Leedex Video 100-80	12.95
NEC JB-1201 Monitor	9.95
Visual Tech 200	20.95
9 Inch CRT	7.95
12 inch CRT	9.95
PRINTERS	
Epson MX-80 and MX-70	9.95
C.ITOH Starwriter	15.95
Okidata Microline 80	9.95
Base 2	9.95
MPI 88T	9.95
Diablo 630	15.95
NEC Spinwriter with Keyboard	15.95
NEC Spinwriter without Keyboard	15.95
Diablo with Keyboard	15.95
Diablo without Keyboard	15.95
Xarox with Keyboard	15.95
Xarox without Keyboard	15.95
Qume Sprint III	14.95
Qume Sprint V with Keyboard	15.95
Qume Sprint V without Keyboard	15.95
Teletype 43	12.95
IDS 440, 445, 460	12.95
Texas Instruments 800 Series	18.95
Trendcom 100 or 200	9.95
Centronics 101	19.95
700, 701, 702, 703, 704, 753	18.95
Centronics 779	16.95
Centronics P1, 730, 737	9.95
Comprint 912	12.95
Anadex DP8000	12.95
Xymec HY Q1000	12.95
Okidata 22, SL125, SL250	15.95
DISK DRIVES	
Micropolis 1041, 1042, 1043, 1053	$9.95
Vista Double Disk	9.95
Vista 5¼" Disk	6.95
Matchless 5¼" Disk	6.95
Lobo Double 8" Disk	9.95
Lobo 5¼" Disk, 14" long	6.95
Lobo 3, 2, 3.3	3.95
MPI B51 or B52 Disk	4.95
Percom 5¼" Disk	4.95
IBM	write
DATA General	write
CPT	write

Send check or money order to
Include $1.50 for postage and handling.
Overseas orders include $4.00 postage.
DEALER INQUIRES INVITED

CompuCover
P.O. Box 324 (Dept. A)
Mary Esther, FL 32569
Phone (904) 243-5793

✓90

✓See List of Advertisers on page 194

MULLEN Computer Products

H8 PROTOTYPE BOARD

Now available for the Heathkit H8 hobbyist.

- Full-sized FR-4 board with heat sink/mounting brackets, buss connectors and polarizing key
- Designed for ease of external cable connection
- All plated thru holes .042" on .1" centers, power and ground traces

HKB-1 H8 PROTOTYPE BOARD $30. kit



H8 EXTENDER BOARD

Our HTB-0 lets H8 owners troubleshoot their boards faster and easier. Each board can be extended above the computer for complete access to all circuits and components.

FEATURES


- Sturdy 3/32" board
- Molex 25-pin edge connectors with formed leads for easy scope probe attachment
- Jumper links in power lines makes current measurement and fusing easy

HTB-0 H8 EXTENDER
$39. (Kit only)

Up-Date

MULLEN Computer Products

S-100 EXTENDER/LOGIC PROBE



- New interlaced ground and signal traces, improves performance, reduces noise, with the new high clock frequency boards
- New brighter display, makes this very handy logic probe easier to use
- New proposed IEEE buss edge connector label, with all the fine quality documentation you expect with Mullen kits.
- High quality FR-4 board is double sided with plated thru holes and solder-masked for easy kit assembly
- Gold on all mating connector surfaces for better electrical contact
- Formed connector leads for easy scope probe attachment
- Jumper links in power lines makes current measurement and fusing easy
- Large "kluge" area lets you build and test your own circuits

S-100 EXTENDER/LOGIC PROBE
$59. Kit $79. Assm/tested

S-100 CONTROLLER BOARD

8 relay – OUTPUTS
8 opto-isolator – INPUTS
256 switch selectable addresses

Our S-100 CONTROLLER is used in laboratories, at universities, and in industry, in hundreds of applications, and may be the answer to your control problem. Complete programming and operating instructions included.

For higher power applications a 500W AC POWER MODULE is available for $15.

CB-1 CONTROLLER Kit $129.
Assm/tested $179.

MULLEN Computer Products

NEW TRS-80* CONTROL BOX

ASSEMBLED BURNED-IN & TESTED, READY TO USE

Special introductory price
M-80 OCTOPORT
$159. Assm/Tested

- 8 reed relay - OUTPUTS
- 8 opto-isolated - INPUTS
- Selectable port address
- Power supply
- Assembled cable & connectors



Use your TRS-80, and our M-80 control box to program control energy savings devices at home or in your business. Send for our free application notes today.

*TRS-80 is a trademark of Tandy Radio Shack Corp.

PLEASE ORDER KITS BY NAME (H8 OR S-100). SEND TO:
MULLEN COMPUTER PRODUCTS, BOX 6214, HAYWARD, CA 94544
OR PHONE (415) 783-2866. VISA/MASTERCHARGE ACCEPTED.
INCLUDE $1.50 FOR SHIPPING & HANDLING. CALIFORNIA RESIDENTS ADD TAX.

✓37

Order Direct or Contact your Local Computer Store.

Listing 2 continued.

```
97 IF FY(2808 THEN JJ=2808-FY: GOTO 101
98 PRINT"                                                    ": R
EM 50 BLANKS
99 IF FY(2936 THEN JJ=2936-FY: GOTO 101
100 JJ=3064-FY
101 IF J)JJ THEN J=JJ
104 PRINT"                                                   ": R
EM 50 BLANKS
105 FOR I=1 TO J
107 FX=0
108 Z$=MID$(AZ$,I,1)
109 PRINT"
                ": REM 70 BLANKS
110     IF ASC(Z$)(64 THEN FX=64
112      POKE FY, ASC(Z$)+FZ+FX
115     FY=FY+1
120 NEXTI
125 RETURN


199 N$=""
200 GET AZ$
205 IF ASC(AZ$)=13 THEN RETURN
210 IF ASC(AZ$)=8 THEN GOTO 250
215 GOSUB94
220 N$=N$+AZ$
225 IF FY(FM THEN GOTO 200
230 RETURN
250 AZ$=" ":FY=FY-1
251 N$=LEFT$(N$,LEN(N$)-1)
255 GOSUB94
260 FY=FY-1
265 GOTO200


300 FOR I=0 TO 39
305     POKE 2640+I, FZ
310     POKE 2768+I, FZ
315    POKE 2896+I, FZ
320    POKE 3024+I, FZ
325 NEXTI
330 RETURN

1000 GOSUB 35
1005 HGR2
1010 GOSUB 70
1015 HCOLOR=2
1020 POKE -16301,0
1025 AZ$="WHAT IS YOUR NAME"
1030 FY=2650:FZ=128
1035 GOSUB 94
1040 AZ$="?":FZ=0:GOSUB 94
1045 FY=2780:FM=2807
1050 FZ=-64:GOSUB 199
1055 AZ$="I AM GLAD TO MEET YOU "+N$
1060 FY=3024:FZ=0
1065 GOSUB 94:GOSUB 90
1070 AZ$=BZ$+BZ$
1075 FY=2640:FZ=0
1080 GOSUB 94
1085 FY=3024:GOSUB 94:GOSUB 90
1090 FY=2768:FZ=128:GOSUB 94


1095 N=0
1100 AZ$="THE GARDEN HAS 24000 LOCATIONS."
1105 FY=2640:FZ=-64:GOSUB 94
1110 N=N+1
1115 AZ$="WHERE DO YOU WANT FLOWER #"+STR$(N)+"?"
1120 FY=2768:FZ=128:GOSUB 94
1125 FY=2896:FZ=0:FM=2935
1130 GOSUB 199
1135 L=VAL(N$)
1140 IF L(0 OR L)24000 THEN FZ=128:GOSUB300:GOTO1100


1145 AZ$="WHAT SIZE FLOWER?"
1150 FY=3024:FZ=128:GOSUB 94
1155 FY=3042:FZ=0
1160 AZ$="S.....L"
1165 GOSUB 94
1170 AZ$="MALL/"
1175 FY=3043:FZ=128:GOSUB 94
1180 AZ$="ARGE?"
1185 FY=3049:GOSUB 94
1190 FZ=0: GOSUB 199
1195 SC$=LEFT$(AZ$,1):SC=2
1200 IF SC$="S" THEN SC=1:GOTO 1210
1205 IF SC$()"L" THEN GOTO 1145
1210 GOSUB 50: GOSUB 23
1215 FZ=160: GOSUB 300


1220 AZ$="DO YOU WANT TO PLANT ANOTHER?"
1225 FY=2640:FZ=128:GOSUB94
1230 AZ$="Y/N"
1235 FY=2780:FZ=0: GOSUB 94
1240 FZ=-64:FM=2679:GOSUB 199
1245 R$=LEFT$(N$,1)
1250 IF R$="Y" THEN GOTO 1100
1255 IF R$()"N" THEN GOTO 1220
1260 FZ=32:GOSUB 300
1265 HOME:TEXT:END
```

WE WILL NOT BE UNDERSOLD

DISK DRIVES



FOR TRS-80* Model I

CCI-100	5¼", 40 Track (102K)	**$314**
CCI-280	5¼", 80 Track (204K)	**$429**

ADD-ON DRIVES FOR ZENITH Z-89

CCI-189	5¼", 40 Track (102K)	**$394**
CCI-289	5¼", 80 Track (204K)	**$499**
Z-87	Dual 5¼" system	**$995**

External card edge and power supply included. 90 day warranty/one year on power supply.

RAW DRIVES 8" SHUGART 801R **$395**
5¼" TEAC or TANDON **$ CALL** POWER SUPPLIES **$ CALL**

DISKETTES — Box of 10

5¼"	**Scotch**	**$30**	**Maxell**	**$40**	**BASF/Verbatim**	**$26.95**
8"	**Scotch**	**$45**	**Maxell**	**$55**	**BASF/Verbatim**	**$36.00**

PLASTIC FILE BOX–Holds 50 5¼" diskettes **$19.00**
PLASTIC LIBRARY CASE 5¼" **$3.00** 3" **$ 4.00**
HEAD CLEANING DISKETTE **$25.00**
FLOPPY SAVER **$11.95** RINGS **$ 6.95**

16K RAM KITS

200 ns for TRS-80,* Apple II, (specify): **2 for $37** **$19** **Jumpers** **$2.50**

SYSTEM SPECIAL

Apple II Plus 48K w/drive and controller. Epson MX-80 printer and interface. SUP-R Mod RF Modulator: List $2965 You Pay **$2299**

COMPUTERS/TERMINALS

ARCHIVES	64K, 2-Drives, 77 Track			**$5495**
ALTOS	ACS8000 Series			**$ CALL**
TRS-80*	II-64K	**$3499**	III-16K	**$ 899**
ZENITH	48K, all-in-one computer			**$2200**
ZENITH	Z-19			**$ 735**
TELEVIDEO	920C	**$ 748**	950	**$1049**
IBM	3101 Display Terminal			**$1189**
ATARI	400	**$ 479**	800	**$ 795**
APPLE PERIPHERALS				**$ CALL**

MONITORS

APF	9" B & W TVM-10		**$115**
BELL & HOWELL	9" B & W BHD911		**$195**
LEEDEX	12" B & W **$ 129**	13" Color	**$329**
SANYO	9" B & W VM4509		**$155**
SANYO	12" B & W DM5012		**$226**
SANYO	12" Green Screen DM5112		**$238**
SANYO	13" Color DMC6013		**$406**
ZENITH	13" Color		**$349**

TELECOMMUNICATIONS

LIVERMORE STAR MODEM 2-year guarantee	**$125**
UNIVERSAL DATA SYSTEMS UDS-103	**$179**
D-CAT HARD WIRED DIRECT MODEM	**$189**
AUTO-CAT Auto Answer, Direct Connect Modem	**$249**
D.C. HAYES MICRO-MODEM	**$295**
CCI Telnet Communications Package	**$135**

PRINTERS



NEC Spinwriter
Letter Quality High Speed Printer

R.O.	**$2395**
R.O. with tractor feed	**$2555**
KSR with tractor feed	**$2795**


C.ITOH	Starwriter	**$1575**	Starwriter II	**$1849**	
EPSON	MX-80	**$CALL**	MX-70	**$CALL**	
PAPER TIGER					
IDS 445	Graphics & 2K buffer			**$ 699**	
IDS 460	Graphics & 2k buffer			**$1050**	
IDS 560	Graphics			**$1450**	
ANADEX	DP-8000	**$ 849**	DP-9500/01	**$1295**	
OKIDATA					
Microline 80	Friction & pin feed			**$ 415**	
Microline 80	Friction, and pin & tractor feed			**$ 500**	
Microline 82	Friction & pin feed feed			**$ 615**	
Microline 83	120 cps, uses up to 15" paper			**$ 849**	
CENTRONICS	730 **$ 595**	799 **$ 969**	737	**$ 749**	
TI-810					

TRS-80* software, compressed print & vert. form control **$1865**

PRINTER SPECIAL

SEIKOSHA GP-80M List $399 You Pay **$319**

S-100 CALIFORNIA COMPUTER SYSTEMS





MAINFRAME	Model 2200A	**$349**
Z80 CPU	Model 2810	**$259**
MOTHER BOARD	Model 2501	**$106**
16K STATIC RAM, 200ns	Model 2116C	**$309**
32K STATIC RAM, 200ns	Model 2032C	**$619**
64K DYNAMIC RAM	Model 2065C	**$580**
FLOPPY DISC CONTROLLER	Model 2422A	**$345**
EXTENDER BOARD	Model 2520K	**$ 52**
2P + 2S I/O	Model 2718A	**$309**

APPLE ACCESSORIES AND SOFTWARE



VISICALC	**$119.00**
DB MASTER	**$159.00**
Z-80 SOFTCARD	**$269.00**
VIDEX BOARD	**$259.00**
16K CARD	**$169.00**
APPLE JOYSTICK	**$ 49.00**
SUP-R MOD	**$ 25.00**
CCS CARDS	**$ CALL**
GALAXIAN	**$ 22.95**
SPACE ALBUM	**$ 35.00**
ASTEROIDS	**$ 17.95**
FLIGHT SIMULATOR	**$ 29.00**
WIZARD & PRINCESS	**$ 28.00**
SARGON 2	**$ 29.00**
HI-RES FOOTBALL	**$ 35.00**
MYSTERY HOUSE	**$ 24.00**

For fast delivery, send certified checks, money orders or call to arrange direct bank wire transfers. Personal or company checks require two to three weeks to clear. All prices are **mail order only** and are subject to change without notice. **Call for shipping charges.**

DEALER (NATIONAL/INTERNATIONAL) INQUIRIES INVITED **Send for FREE Catalogue**

The CPU SHOP

TO ORDER CALL TOLL FREE 1-800-343-6522
256 **TWX: 710-348-1796** Massachusetts Residents call 617/242-3361

5 Dexter Row, Dept. K07M
Charlestown, Massachusetts 02129
Hours 10AM-6PM (EST) Mon.-Fri. (Sat. till 5)

Technical Information call 617/242-3361
Massachusetts Residents add 5% Sales Tax
Tandy Corporation Trademark/® Digital Research

master charge THE INTERBANK CARD VISA

See List of Advertisers on page 194

Benefit from this author's experience using graphics routines in a BASIC program.

New, Improved Sorcerer Graphics

By Avram R. Vener

Dr. Colin S. L. Keay provided some excellent graphics subroutines in the March 1980 issue ("Improved Sorcerer Graphics Resolution," p. 74) that can be used to develop medium-resolution graphics within a BASIC program.

Address correspondence to Avram R. Vener, 7 Old Hyde Road, Weston, CT 06883.

Listing 1. The Sketch program.

```
100 REM*********************************************************
110 REM
120 REM MEDIUM RESOLUTION SKETCH PROGRAM
130 REM
140 REM    BY    AVRAM R. VENER
150 REM
160 REM*********************************************************10
7
170 PRINTCHR$(12):PRINT"THIS IS AN ETCH A SKETCH SIMULATOR"
180 INPUT"NEED INSTRUCTIONS";YN$
190 IFYN$="N"THEN320
200 PRINTCHR$(12)
210 PRINT"THE CURSOR WILL MOVE ABOUT THE SCREEN IN THE DIRECTION
"
220 PRINT
230 PRINT"INDICATED BY THE ARROWS ON THE KEYPAD. DIAGONAL "
240 PRINT
250 PRINT"MOVEMENT IS CAUSED BY THE 1,3,7,AND 9 KEYS LOCATED"
260 PRINT
270 PRINT"BETWEEN THE ARROWED KEYS. THE 5 KEY STOPS THE CURSOR"
280 PRINT
290 PRINT"WHILE PRESSIND C CLEARS THE SCREEN AND E LEAVES THE"
300 PRINT
310 PRINT"PROGRAM. ":FORWT=1TO5000:DM=WT:NEXTWT
320 DATA 205,24,224,50,15,0,201:REM GET ROUTINE
330 FORXC=8TO14:READXD:POKEXC,XD:NEXTXC
340 GOSUB930:PRINTCHR$(12)
350 DATA 62,0,246,0,50,1,0,201:REM OR ROUTINE
360 FORXA=0TO7:READXB:POKEXA,XB:NEXT
370 POKE260,8:POKE261,0
380 GET=USR(0):GOSUB710:GOSUB400
390 GOTO370
400 V=X/3:X1=X+1
410 VP=INT(V+1)*64:HP=Y/2:HE=INT(HP):HE=HP-HE
420 IFHE<>0THENMX=2:GOTO440
430 MX=1
440 FORJJ=0TO89STEP9
450 ON(X1-JJ)GOTO470,480,490,470,480,490,470,480,490
460 GOTO500
470 MY=16:JJ=89:GOTO500
480 MY=4:JJ=89:GOTO500
490 MY=1:JJ=89
500 NEXTJJ
510 PN=MY*MX
520 REM SREEN UPDATE
530 PRINTCHR$(17);"X ";X;"  Y";Y
540 LO=INT(-2048-VP+HP)
550 GOSUB650
560 GOSUB580
570 RETURN
580 REM SCREEN UPDATE
590 POKE260,0:POKE261,0
600 R=PEEK(LO)-192
```

More →

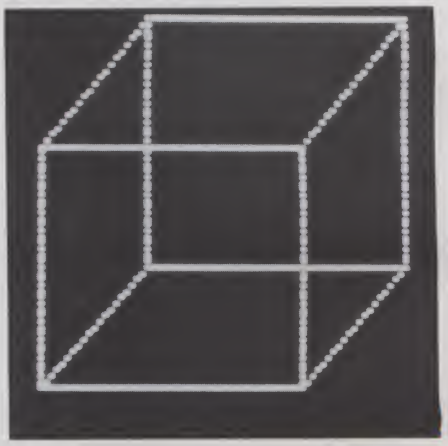


Photo 1. Sample Sketch program output.



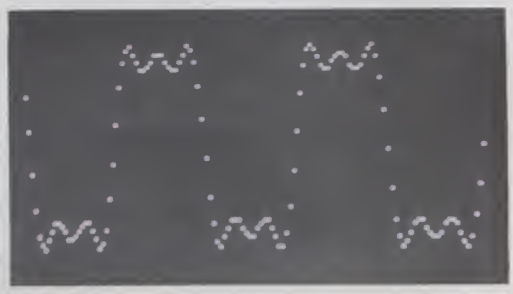


Photo 2. Sample plot of the Function Plotting program.

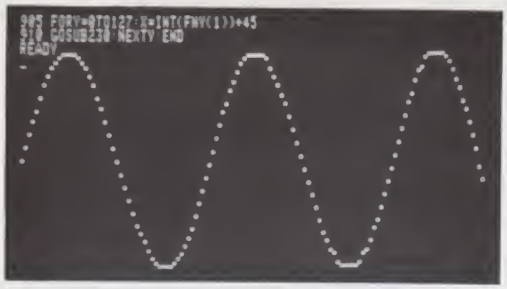

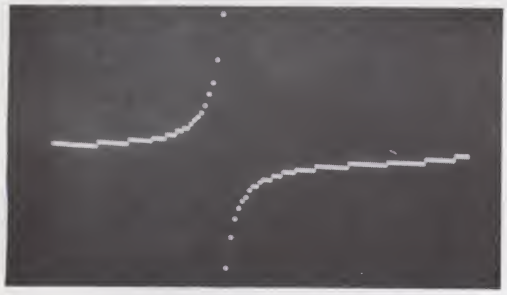

Photos 3 and 4. Alternative plots.

```
900 FORR=0TO1:POKEP,Q:P=P+1:NEXTR:RETURN
910 POKEP,0:P=P+1:RETURN
920 REM FUNCTION SUBROUTINE
930 DEF FNY(U)=SIN(Y/8*U)*10/U
940 DEF FNZ(U)=COS(Y/8*U)*10/U
950 FORY=0TO127:X=INT(FNY(.5))+45
960 GOSUB290:NEXTY
970 FORY=0TO127:X=INT(FNZ(.5))+45
980 GOSUB290:NEXTY
982 DEF FNX(U)=FNY(U)*FNZ(U)
984 FORY=0TO127:X=INT(FNX(.5))/10+45
986 GOSUB290:NEXTY
988 DEF FNW(U)=FNY(U)+FNZ(U)
990 FORY=0TO127:X=INT(FNW(.5))+45
992 GOSUB290:NEXTY
```

Listing 3. Multiple Function Plot subroutine.

Listing 1 continued.

```
610 IF(R<0ORR>63)THENR=0
620 POKE1,PN:POKE3,R
630 ZZ=USR(0)
640 PN=PEEK(1)+192:POKELO,PN:RETURN
650 REM SAFETY ROUTINE
660 IFLO>-3968THEN680
670 LO=LO+1920:GOTO660
680 IFLO<-2049THEN700
690 LO=LO-1920
700 RETURN
710 REM GET EVALUATION
720 KI=PEEK(15)
730 IFKI=0THEN750
740 KN=KI
750 IF(KN<49ORKN>57)THEN900
760 ONKN-48GOTO770,780,790,800,810,820,830,840,850
770 X=X-1:Y=Y-1:GOTO860
780 X=X-1:GOTO860
790 X=X-1:Y=Y+1:GOTO860
800 Y=Y-1:GOTO860
810 GOTO860
820 Y=Y+1:GOTO860
830 X=X+1:Y=Y-1:GOTO860
840 X=X+1:GOTO860
850 X=X+1:Y=Y+1
860 IFX>89THENX=89
870 IFX<0THENX=0
880 IFY>127THENY=127
890 IFY<0THENY=0
900 IFKN=67THENPRINTCHR$(12)
910 IFKN=69THENEND
920 RETURN
930 REM 3X3 POINT PLOT
940 P=-512
950 FORN=0TO1:FORM=0TO1:FORL=0TO1
960 FORK=0TO1:FORJ=0TO1:FORI=0TO1
970 Q=224*I+14*J:GOSUB1010:GOSUB1020
980 Q=224*K+14*L:GOSUB1010:GOSUB1020
990 Q=224*M+14*N:GOSUB1010
1000 NEXTI:NEXTJ:NEXTK:NEXTL:NEXTM:NEXTN:RETURN
1010 FORR=0TO.:POKEP,Q:P=P+1:NEXTR:RETURN
1020 POKEP,0:P=P+1:RETURN
1030 IFKI=0THEN760
```

Unfortunately for less-experienced programmers, he did not demonstrate the use of these subroutines with an actual BASIC program. It took me a while to get familiar with them, but the time was well-spent. The two BASIC programs that follow show how I used a few of these medium-resolution graphics routines.

Sketch

The Sketch program (Listing 1) lets you create line drawings on the screen (see Photo 1). By using the keypad you can alter the direction of the cursor.

Lines 320 and 330 insert the machine-language GET routine into memory. The subroutine at 930 sets up the 3*2 point plot characters in the user graphics memory. Next, the machine-language OR routine is set up in RAM with lines 350 and 360.

Listing 2. The Function Plotting program.

```
100 REM ******************************************************
101 REM
102 REM MEDIUM RESOLUTION FUNCTION PLOTTING PROGRAM
103 REM
104 REM       BY    AVRAM R. VENER
105 REM
106 REM ******************************************************
107 REM
109 PRINTCHR$(12):PRINT"GRAPH PLOT BY RUDY VENER 9/25/80"
110 INPUT"NEED INSTRUCTIONS";YN$
120 IFYN$="N"THEN139
130 PRINT"This is a Medium resolution plotting program. To plot"
135 PRINT"your function you must modify or completely rewrite"
136 PRINT"the subroutine at location 900. To see what is "
137 PRINT"in the subroutine type S. Otherwise hit RETURN.  "
138 PRINT"To reenter the program after modifying 900, type RUN"
139 INPUTWW$
145 IFWW$="S"THENLIST900
170 GOSUB740:PRINTCHR$(12)
180 DATA 62,0,246,0,50,1,0,201:REM OR ROUTINE
190 FORXA=0TO7:READXB:POKEXA,XB:NEXT
200 POKE260,8:POKE261,0
205 GOTO900
```

More →

Listing 2 continued.

```
230 V=X/3:X1=X+1
240 VP=INT(V+1)*64:HP=Y/2:HE=INT(HP):HE=HP-HE
250 IFHE<>0THENMX=2:GOTO270
260 MX=1
270 FORJJ=0TO89STEP9
280 ON(X1-JJ)GOTO300,310,320,300,310,320,300,310,320
290 GOTO330
300 MY=16:JJ=89:GOTO330
310 MY=4:JJ=89:GOTO330
320 MY=1:JJ=89
330 NEXTJJ
340 PN=MY*MX
350 REM SREEN UPDATE
355 PRINTCHR$(17);"X ";X;"  Y";Y
360 LO=INT(-2048-VP+HP)
370 GOSUB470
380 GOSUB400
390 RETURN
400 REM SCREEN UPDATE
410 POKE260,0:POKE261,0
420 R=PEEK(LO)-192
430 IF(R<0ORR>63)THENR=0
440 POKE1,PN:POKE3,R
450 ZZ=USR(0)
460 PN=PEEK(1)+192:POKELO,PN:RETURN
470 REM SAFETY ROUTINE
480 IFLO>-3968THEN500
490 LO=LO+1920:GOTO480
500 IFLO<-2049THEN520
510 LO=LO-1920
520 RETURN
740 REM 3X3 POINT PLOT
750 P=-512
760 FORN=0TO1:FORM=0TO1:FORL=0TO1
770 FORK=0TO1:FORJ=0TO1:FORI=0TO1
780 Q=224*I+14*J:GOSUB820:GOSUB830
790 Q=224*K+14*L:GOSUB820:GOSUB830
800 Q=224*M+14*N:GOSUB820
810 NEXTI:NEXTJ:NEXTK:NEXTL:NEXTM:NEXTN:RETURN
820 FORR=0TO1:POKEP,Q:P=P+1:NEXTR:RETURN
830 POKEP,0:P=P+1:RETURN
900 REM FUNCTION SUBROUTINE
903 DEF FNY(U)=SIN(Y/8*U)*25/U
905 FORY=0TO127:X=INT(FNY(1)+FNY(3)+FNY(5))+45
910 GOSUB230:NEXTY:END
```

The program begins to sketch by getting the key press, which is evaluated in the subroutine starting at line 710. Lines 750 to 760 vary the direction of the cursor, depending on the proper key press. The screen is updated at the subroutine in line 400, and the X and Y coordinates are printed at the top left of the screen.

These coordinates can be useful, especially when the cursor is travelling along a previously drawn line and is therefore invisible. The cube in Photo 1 was made by first drawing a square, and then moving along the border of the square until the X and Y coordinates indicated the cursor was at the corners. A diagonal line was then drawn at each corner, and their ends connected with a second square.

Function Plot

The Function Plot program (Listing 2) is only a modification of the Sketch program. I eliminated the GET function and its evaluation routine and replaced them with a function-generating subroutine at line 900. As an integral part of the program, the user has the option of getting a listing of subroutine 900, modifying it and reentering the program.


Photo 2 is the plot of the subroutine included in Listing 2. Photos 3 and 4 are the plots from the listings of some alternative subroutines.


A nice feature of this program is that you can observe the relationships of various functions by generating one after the other on the same screen. Listing 3, for example, will plot the functions Sin(Y), Cos(Y), Sin(Y)*Cos(Y) and Sin(Y)+Cos(Y).■

'68' MICRO JOURNAL ™
6800-6809-68000
★ The only ALL **68XX** Computer Magazine
Foreign Orders—Add:
Air Mail $35.00 /Year-Surface $12.00 /Year
Canada & Mexico Add $5.50 to USA Rate
1-Year **$18.50** 2 Years **$32.50**
3 Years **$48.50**
OK, PLEASE ENTER MY SUBSCRIPTION
Bill my: M/C ☐ — VISA ☐
Card # _____
Expiration Date _____
For ☐ 1-Yr. ☐ 2 Yrs. ☐ 3 Yrs.
Enclosed: $ _____
Name _____
Street _____
City _____
State _____ Zip _____
'68' MICRO JOUNRAL ™
3018 Hamill Road
HIXSON, TN 37343 ✓132

SURPLUS ELECTRONICS
ASCII  ASCII
TRS-80* COMPATIBLE,
IBM SELECTRIC®-BASED
I/O TERMINAL with
ASCII conversion installed: **$645.00**
Many Other Items Available:
Tape Drives; Cable;
Cassette Drives; Wire; Power Supplies (5 volt 35 amp, others); Displays; Cabinets; Transformers; Heat Sinks; Printers; Components.
Send for free catalog.
WORLDWIDE ELECT. INC.
130 Northeastern Blvd.
Nashua, NH 03062 ✓122
Phone orders accepted using VISA or Master Charge
TOLL FREE 603-889-7661 ● 1-800-258-1036
TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation.

No. 2 UNBELIEVABLE OPPORTUNITY!
If You've Written an Outstanding Program-- We'd Like to Publish It!
We're looking for EDUCATION Programs:
SPECIAL EDUCATION/AID TO THE HANDICAPPED
MULTI-MEDIA COMPUTER INSTRUCTION
TEACHER-AUTHORING LANGUAGES
MANAGEMENT TRAINING
SIMULATIONS
Earn money while helping others. Write for our free Programmer's Kit today!
INSTANT SOFTWARE, INC.
Submissions Dept. ✓75
Peterborough, NH 03458

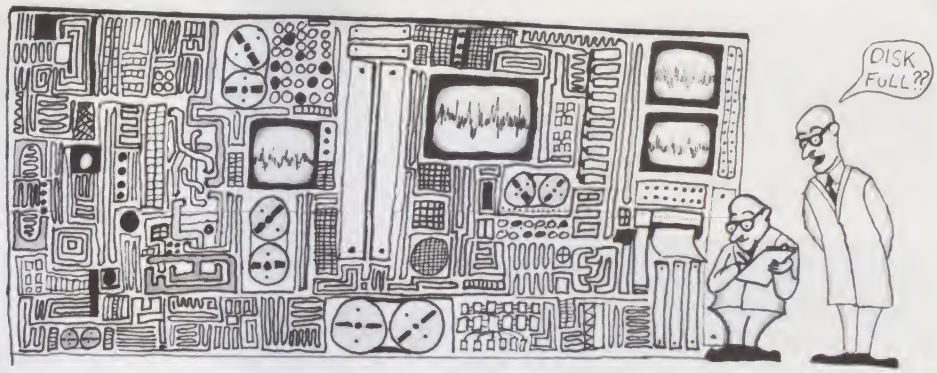

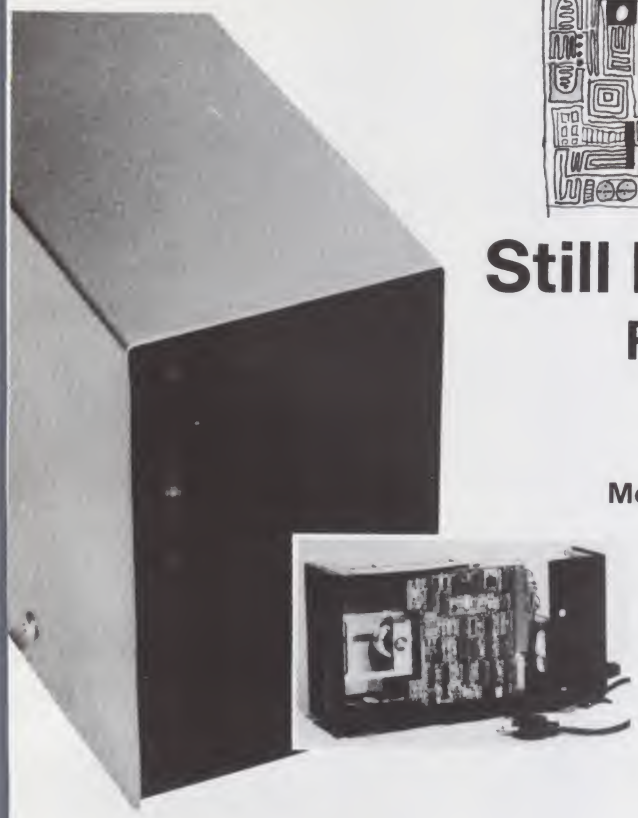

Still have storage problems?

Fully TRS-80® Compatible

(Model I or III)

MPI Disk Drives

Model B/51 250K, 1 Side, 40 Tracks. **$321.00**
B/52 500K, 2 Sides, 40 Tracks per side. $439.00
B/91 500K, 1 side, 80 Tracks. $439.00
B/92 1 Meg, 2 Sides, 80 Tracks per side. $590.00

Includes: Case and Power Supply — Fully Tested

10 Day Money Back Guarantee

90 Days Parts and Labor Warranty (Excl. Shpg.)

Here's just a few of the features of MPI Disk Drives

- 40/80 Tracks
- 5 ms track-to-track
- Auto-eject
- Hi-Temp stability
- Speed constant ‹1½%
- Single/double density
- Optical sensors—no switches
- 102K per disk

ADDS MORE POWER TO YOUR SYSTEM

Save time . . . Order by phone

Orders only: 1-800-621-3229
Information: 312-987-1024
Tech. assistance: 312-987-1032

Other Money Savings Opportunities Order by Phone or Mail

CABLES

Drive Cable. **$29.00**
Drive Cable. **$39.00**

Diskettes

Verbatim. . . . . 10 for **$31.00**
Syncom. . . . . 10 for **$35.00**
Plastic File Box. **$3.95**

Operating Systems

TRSDOS 2.3. . . . . **$14.95**
0 Track Patch. **$9.95**
NEWDOS + 40 Track. **$99.00**
Newdos 80. . . . . **$139.00**
TRSDOS Manual. **$5.95**
Super Utility. **$49.00**
Make 80. . . . . **$14.00**

TRS-80

16K Model III. **$899.00**
48K Model III w/2 Disks. **$1900.00**
Expansion Interface OK. **$274.00**

Printers

Centronics 737-1. . **$815.00**
IDS 460. . . . . **$1219.00**
Epson MX80. . . . . **$550.00**
Okidata M80. . . . . **$499.00**
Microline 82. . . . . **$650.00**
Microline 83. . . . . **$950.00**
Okidata prices include tractors
NEC Spinwriter 5530 (freight collect). . **$2579.00**

16K Memory Kits

Prime NEC 200ns dynamic RAM. Comes with complete instructions. **$39.00**
MPI Service Manual. **$3.00**
MPI Engineering Manual. **$30.00**

MIDWEST COMPUTER PERIPHERALS® ✓150

1467 S. MICHIGAN
CHICAGO, ILLINOIS 60605

TRS 80 TANDY CORP.

FREE! UPS GROUND SHIPPING ON ALL ORDERS OVER $100.00

Quantity	Description	$ each	Total
		6% IL Tax	
		TOTAL	

(Minimum order $50.00)

☐ Check enclosed
Bill my ☐ Visa ☐ Am Ex
☐ Master Charge
Acct. No. _____ Exp. _____


Name _____
Address _____
City _____ State _____ Zip _____

Not Responsible for Typographical Errors. Prices Subject to Change w/o notice.

These two game programs test your driving skills and the graphics capability of the C1P.

Hot Rod Graphics

By Dorn Greenwood

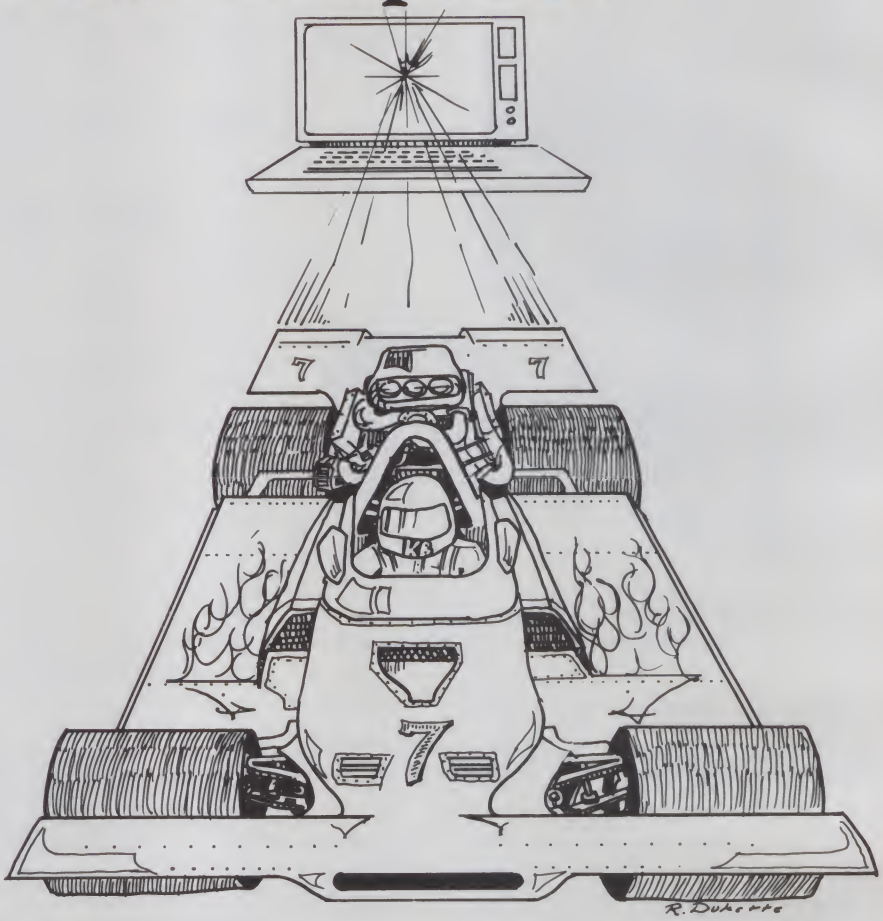

These two simple programs, Blockade and Roadrace, are for the Ohio Scientific C1P. Each takes up less than 2K of memory.

In this version, for two players only, each player controls a line (or a blockade), by moving it in any one of four directions (up, down, left or right). The object of the game is to make your opponent either run into your blockade or the boundary. After each collision the clumsy party is given a point against him. The first person to get four points loses.

The first player uses the keys I, L, M and J for up, right, down and left, respectively. The second player uses the keys W, D, X and A.

The blockades will not appear on the screen until a direction key has been pushed. Also, the two players may not go in the same direction at once.

After getting familiar with the graphics on my particular system, I remembered seeing a roadrace program, and thought it would be easy to create my own.

In this game, you are on a winding road and must move to the left or the right to avoid hitting the sides of the road. You're allowed ten crashes to a game. This limit is set in line 205. The object of the game is to get as far as possible in miles before the ten crashes are up.

When the game starts, you must maneuver onto and down the track using the G key for left and H for right. The program has difficulty levels ranging from four to ten. Level ten is easy enough for a blind monkey, while level four is very hard. For users with the CIS ROM IC, add the following line to the program:

13 FOR I=1 to 26:PRINT:NEXT

The program is shorter than others because instead of having the track in data statements, it randomly makes the track different every time.■

Address correspondence to Dorn Greenwood, 15 Grafton Ave., Toronto, Ontario, M6R 2C3, Canada.

Blockade program listing.

```
1 INPUT"RIGHT PLAYER";A
$:INPUT"LEFT PLAYER":B$
2 FORI=53200TO54250:POKE I,32:NEXT
5 POKE 530,1
10 A=54117:Z=54135
11 MO=53379:FOR S=1TO24:MO=MO+32:POKE MO,161:NEXT
12 MO=53411:FOR S=1TO27:MO=MO+1:POKE MO,161: NEXT
13 MO=53436:FOR S=1TO24:MO=MO+32:POKE MO,161:NEXT
14 MO=54173:FOR S=1TO27:MO=MO-1:POKE MO,161:NEXT
15 K=57088:L=127:M=191:N=161
20 POKE K,239:IF PEEK(K)=L THEN  45
```

More →

Listing continued.

```
25 POKE K,247:IF PEEK(K)=M THEN 55
30 POKE K,251:IF PEEK(K)=L THEN 65
35 POKE K,253:IF PEEK(K)=M THEN 75
37 IF PEEK(K)=247 THEN 115
39 GOTO 140
45 A=A-32:POKE A,N
46 AA=PEEK(A-32)
47 IF AA=161OR AA=187 THEN 90
50 GOTO 140
55 A=A+1:POKE A,N
56AB=PEEK(A+1)
57 IFAB=161 OR AB=187 THEN90
60 GOTO 140
65 A=A+32:POKE A,N
66 AC=PEEK(A+32)
67 IF AC=161 OR AC=187 THEN90
70 GOTO 140
75 A=A-1:POKE A,N
76 AD=PEEK(A-1)
77 IF AD=161 OR AD=187 THEN90
80 GOTO 140
90 PRINT B$;" CRASHED"
95 C=C+1
97 IF C=4 THEN 260
100 GOTO 2
115 GOTO 2
140 POKE K,239:IF PEEK(K)=253 THEN 190
150 POKE K,247:IF PEEK(K)=251 THEN 200
160 POKE K,251:IF PEEK(K)=251 THEN 210
170 POKE K,223:IF PEEK(K)=191 THEN 220
180 GOTO 20
190Z=Z-32:POKE Z,187
195 BB =PEEK(Z-32)
197 IF BB=161ORBB=187 THEN 230
198 GOTO 20
200 Z=Z-1:POKE Z,187
205 BC =PEEK(Z-1)
207 IFBC=161 OR BC=187 THEN 230
208 GOTO 20
210 Z=Z+32:POKE Z,187
215BD=PEEK(Z+32)
217 IFBD=161ORBD=187 THEN 230
218 GOTO 20
220 Z=Z+1:POKE Z,187
225 BE=PEEK(Z+1)
227 IF BE=161 OR BE=187 THEN 230
228 GOTO 20
230 D=D+1:PRINT A$;" CRASHED":IF D=4 THEN 260
240 GOTO2
260 PRINT TAB(10);"SCORE"
265 PRINT:PRINT A$;" ";D
270 PRINT:PRINT B$;" ";C
300 END
```

Roadrace program listing.

```
1 G=53428
5 H=54030
10 INPUT"HOW DIFFICULT";C
12 FORI=53200TO54250:POKEI,32:NEXTI
15 A =54029:B=A+C
20 J=INT((B-A)*RND(1)+A)
22 IFH+1=JORH-1=J THEN 25
23 GOTO 20
25 H=J
26 POKE J,161
```

More

If you're looking for the best prices in the U.S.A. on



TRS-80®
MICROCOMPUTERS


We have consistently offered the TRS-80 line at savings **up to 20%**, which means you can save $150 to $1500 by buying directly from Computer Discount of America.

TRS-80 Model II, 64K System, with disc drive only $3385.00

Other TRS-80 Model II, or Model III computers and systems, Color Computers, and Pocket Computers are in stock at similar savings.

Our savings are as big on expansion interfaces, printers, diskettes – everything for your TRS-80 System.

ATARI®
MICROCOMPUTERS



We have the full line of ATARI personal computers and systems, including Models 400 and 800. The computers, accessories, and hardware are brand new, in factory sealed cartons, and carry a full factory warranty. Most models are in stock for immediate delivery (usually within 7-10 days), and a price quote is as near as your phone. So if you're looking for the **best prices in the U.S.A.**, for microcomputers and accessories, call Computer Discount of America, Inc., West Milford, New Jersey 07480. 201-728-8080. **NO TAX ON OUT-OF-STATE SHIPMENTS.**


TOLL FREE 800-526-5313

Computer Discount of America

Authorized TRS-80 dealer, store B-282.

r-120

MICRO-80™ CASSETTES—
100% ERROR-FREE

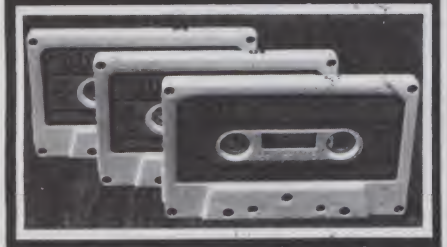

LENGTH	12 PACK	24 PACK
C-10	69¢	59¢
C-20	89¢	79¢

- Fully Guaranteed!
- World's Finest Media
- Premium 5-Screw Construction
- Used by Software Firms Nationwide
- Dealer and Club Discounts Available
- Custom Storage Case, Add 19¢ Each
- Shipping Charges, Add $1.50 ↙308

μ80™ MICRO-80™ INC.
K-2665 NO. BUSBY ROAD
OAK HARBOR, WA 98277

Listing continued.

```
 27 POKE J+C,161
 35 PRINT
 40 GOSUB 60
 45 POKE G,0
 47 POKE G-32,32:POKE G-64,32
 49 IF PEEK(G+32)=161 THEN 200
 50 GOTO 20
 60 POKE 530,1
 70 K=57088
 80 POKEK,247
 85 IF PEEK(K)=239THEN 100
 90 IF PEEK(K)=247THEN 110
 95 RETURN
100 G=G-1:POKE G,0
101 M=M+1
102 IF PEEK(G-1)=161 THEN 200
105 RETURN
110 G=G+1:POKE G,0
111 M=M+1
112 IF PEEK(G+1)=161THEN 200
115 RETURN
200 PRINT"***BANG***"
202 FORI=1T050:POKE G,232:POKE G,233:NEXT
203 Z=Z+1
205 IF Z=10 then220
210 GOTO 20
220 PRINT"#*#*TEN#*#*"
230 PRINT"YOU WENT ";(M*10);"MILES"
250 END
```


TRS-80™ SUPER SOFTWARE at REASONABLE PRICES

TRS-80™ A Trademark of Tandy Corp.

LDOS MODEL I & III
The Ultimate Operating System

A completely documented new generation of operating system for the TRS-80. Far superior to any on the market, it is a totally device independent system, capable of device linking, routing, setting, and filtering. LDOS will support 5" and 8" floppies, single/double density, single/double sided, and up to 80 tracks.

Model I & III ..... **ONLY $149.00**

PROGRAMMERS EASE SYSTEMS

EDAS ●●●●● SPECIAL ●●●●●

The first user oriented Editor Assembler designed to utilize all the features of your Model II and TRSDOS operating system. EDAS 4.0 includes innovative features for ease of coding and debuging. Includes complete documentation. ..... Was $229.00
SPECIAL SALE PRICE **$99.00**

also available ...

HOST I/O SYSTEM Model II $199.00
STOCK MARKET MONITOR Model I & III
Disk version $99.00
Cassette version $89.00

THE GREAT GAME

ULTRA TREK MODEL I AND III
Can You Master This Trip Through The Galaxies?

Climb aboard the Star-ship Enterprise and head for a universe of unknown encounters, enemies and stellar battles. As commander, will you be able to keep the enterprise and its crew en route and on patrol. Order yours today. ..... **ONLY $19.95**

INVENTORY MASTER SYSTEM MODEL I A Great Business System

With todays market, keeping on hand only what your demand calls for is reason enough to let your TRS-80 accurately and effectively take care of your inventory. Always know what to stock and when to stock it. This system has many features which were modeled after a main frame system of large capacity. More information available upon request.
JUST **$159.00**

BUSINESS & PERSONAL MAILING SYSTEMS

MAIL/FILE - SERIES II MODEL I & III

A smaller scale of the Mass/Mail System with many of the same unique features. Mail/File will handle up to 600 names on Model I and 1200 on Model III. Keep those cards and letters going out. Call or send for information today.
A BARGAIN AT **$159.00**

MAIL/FILE-MODEL II

System for the smaller needs of a Model II owner. Will handle up to 2500 names, with some of the same unique features of the Mass/Mail system. A flexable and capable program for any small business. Call or send for more information.
ONLY **$199.00**

MASS/MAIL-MODEL II

A system to fill the needs of the large mailer. You'll be amazed at all this system can do for you. It will handle up to 10,500 names. The systems versatility in user defining ability is one of its finer features. Call or send for information today
CONTACT GALACTIC FOR PRICE

galactic software ltd. ↙135

A Division of GS & WS, Inc.
11520 N. Port Washington Rd.
Mequon, Wisconsin 53092
(414) 241-8030



Money Orders, Credit Cards, & COD's Shipped Within 24 Hours. NOW ACCEPTING MASTER CHARGE & VISA

DISK DRIVE WOES?
PRINTER INTERACTION?
MEMORY LOSS?
ERRATIC OPERATION?

Don't Blame The Software!



Power Line Spikes, Surges & Hash could be the culprit! Pat. #4,259,705

Floppies, printers, memory & processor often interact! Our patented ISOLATORS eliminate equipment interaction AND curb damaging Power Line Spikes, Surges and Hash.

- **ISOLATOR (ISO-1) 3 filter isolated 3-prong sockets; integral Surge/Spike Suppression; 1875 W Maximum load, 1 KW load any socket** **$62.95**
- **ISOLATOR (ISO-2) 2 filter isolated 3-prong socket banks; (6 sockets total); integral Spike/Surge Suppression; 1875 W Max load, 1 KW either bank** **$62.95**
- **SUPER ISOLATOR (ISO-3), similar to ISO-1 except double filtering & Suppression** **$94.95**
- **ISOLATOR (ISO-4), similar to ISO-1 except unit has 6 individually filtered sockets** **$106.95**
- **SUPER ISOLATOR (ISO-11) similar to ISO-2 except double filtering & Suppression** **$94.95**
- **CIRCUIT BREAKER, any model (add-CB)** ..... **Add $ 8.00**
- **CKT BRKR/SWITCH/PILOT (-CBS)** ..... **Add $16.00**

AT YOUR DEALERS

Master-Card, Visa, American Express
Order Toll Free 1-800-225-4876
(except AK, HI, PR & Canada)

Electronic Specialists, Inc. ↙93
171 South Main Street. Natick. Mass. 01760
Technical & Non-800: 1-617-655-1532

DIABLO 1620 $1895



- Letter quality daisywheel printer
- Upper and lower case
- Forms tractor, print wheel, ribbon included
- ASCII serial interface with RS-232 cable
- Bidirectional printing
- Completely refurbished by national terminal distributor with 30 day warranty

PRINTERS		VIDEO MONITORS	
NEC 5510	$2495	9" Sanyo B&W	$169
NEC 5530	2495	12" Sanyo B&W	289
Diablo 630	2425	12" Sanyo w/green screen	299
Centronics 730	675	13" Sanyo Color	495
Centronics 737	799	9" Panasonic B&W	169
		9" RCA B&W	169

DISKETTES

	Verbatim			3M	
5"SS,DD	10/2.40	50/2.35	5"SS,SD	10/2.80	50/2.70
5"DS,DD	10/3.95	50/3.90	8"SS,SD	10/2.90	50/2.80
5"SS,QD	10/2.90	50/2.85	8"SS,DD	10/3.50	50/3.40
8" SS, SD	10/3.05	50/3.00	8" DS, SD	10/4.50	50/4.40
8" SS, DD	10/3.35	50/3.30	8" DS, DD	10/4.50	50/4.40
8" DS, DD	10/4.15	50/4.10	Disk Flip 'N File Case 5" 22.95, 8" 27.95		
Diskette Storage Pages 10/4.25			Disk Library Case 5" 2.05, 8" 2.80		

3M HEAD CLEANING KIT

- Eliminate downtime
- Eliminate service calls
- Increase life of read-write heads
- Cleans in 30 seconds
- Removes dust, dirt, magnetic oxides



5¼" or 8" **$19.50**

PAPER & LABELS

Greenbar 14⅞x11	
one part 3000 sheets	39.95
two part 1300 sheets	45.95
White 9½x11	
one part 3500 sheets	29.95
two part 1400 sheets	33.95
Labels 3½x15/16	
one across box of 5000	17.30
two across box of 10,000	34.60

PRINT WHEELS

Mfr.	ea.	6+
Diablo	8.25	7.50
Qume	8.25	7.50
NEC	17.00	15.50


RIBBONS

Mfr.	ea.	Doz.
Diablo	6.50	72.00
Qume	4.00	43.50
NEC	7.00	71.50

Call for quantity prices—Minimum $1.75 shipping and handling. ↙63

DAVIS SYSTEMS INC.
2184 Meadowcliff Drive N.E., Atlanta, GA. 30345
(404) 634-2300

JPC PRODUCTS FOR 6800 COMPUTERS



High Performance Cassette Interface

- **FAST** - 4800 Baud Loads 4K in 8 Seconds!
- **RELIABLE** - Error Rate Less Than 1 in 10^9 Bytes.
- **CONVENIENT** - Plugs Directly Into The **SWTPC.**
- ***PLUS*** - A Fully Buffered 8 Bit Output Port Provided.
- **LOW COST** - $59.95 For Complete Kit.
- **OPTIONAL** - CFM/3 File Manager.

Manual & Listing $19.95
(For Cassette Add) $ 6.95

TERMS: CASH, MC or VISA.
Shipping & Handling $3.00

JPC PRODUCTS CO.
Phone (505) 294-4623
↙92 12021 Paisano Ct.
Albuquerque, N.M. 87112

PACIFIC OFFICE SYSTEMS

COMPUTER INTERFACES & PERIPHERALS

- **POS-100 NRZ1 TAPE DRIVE CONTROLLER/FORMATTER** — Now your micro can read and write IBM/ANSI compatible NRZ1 format 9-track magnetic tapes. The POS-100 consists of S-100 bus card, 6' ribbon cable, tape drive controller card, cable to Pertec-Standard NRZ1 Tape drive, plus documentation and Z-80 or 8080 software (specifiy). Power is derived from tape drive and S-100 bus. Ship Wt.: 10 lbs. Suggested Retail Price $995.00
- **POS 103/202 "MIX or MATCH" MODEM** — Unique POS control design permits use in one housing of both Bell-compatible 103 (0-300 baud) and 202 (0-1200 baud) modem modules originally made by VADIC Corp. for a telephone company subsidiary. FEATURES: RS-232 serial Interface, auto-answer, auto-dial, LED display, telephone line interface via acoustic coupler, manual DAA, or auto-answer DAA (sold separately). FULLY ADJUSTED; no special tools required. 3,000 mile range over standard dial-up telephone lines. Ship wt.: 15 lbs.
PRICES . . . . . POS 103 Modem — $199.95; POS 202 Modem — $299.95; POS 202 Modem w/Auto-Answer — $349.95; POS 103/202 Modem — $499.95; FCC-Approved Auto-Answer DAA — $125.00; Acoustic Coupler — $29.95.
- **POS DAISY-WHEEL PRINTER INTERFACE for TRS-80** — Will drive Diablo HyType I, HyType II, and Qume Q and Sprint 3 printers. Includes 1K user-available memory for custom print routines (such as graphics, bidirectional printing, etc.). Programmed to respond to print commands from BASIC ELECTRIC PENCIL™ and SCRIPSIT™ software. Draws its power from printer. Ship wt.: 5 lbs. Price $250.00
Cables, each (Specify HyType I, HyType II, or Qume) . . . . . $ 25.00
- **POS ASCII INTERFACE for IBM I/O SELECTRIC** — This *Centronics-style* parallel printer interface will drive an IBM Model 731 or 735 I/O typewriter (EBCD and Correspondence codes). No software needed. Features on-board EPROM which holds up to 8 ASCII-to-IBM code tables for different type spheres. Closed-loop operation runs at maximum printer speed; stops and starts on a single character without loss of data. Requires +12VDC and ±5VDC power source. Ship wt.: 5 lbs. Price $249.95
Power Supply (+5VDC, +12VDC, +24VDC for Solenoids on Printer) . . . .$ 49.95
- **CONVERT OFFICE SELECTRIC TO I/O TYPEWRITER** — Kit includes assembled solenoids, switches, wire harness, magnet driver PCB plus instructions for installation and mCPU interface. Price $150.00
- **"FORMALINER" Variable Width Forms Tractor** for 15" Selectrics . . . $95.00
- **GTE Model 560 ASCII SELECTRIC I/O Terminal** — With RS-232 Serial Interface and digital cassette deck for use as memory typewriter. Ship wt.: 100 lbs.
Price, tested and adjusted $1,195.00
- **POS ASCII IBM SELECTRIC PRINTER** — 15" Selectric from GTE terminal cleaned and adjusted with POS Centronics-style ASCII printer interface. UC/LC, carbon and fabric ribbons. Compatible with TRS-80, Apple, SOL and other CPU parallel printer ports. Ship wt.: 75 lbs. Price $895.00

PACIFIC OFFICE SYSTEMS ↙153
2265 Old Middlefield Way Mountain View, Calif. 94043 (415) 493-7455

↙See List of Advertisers on page 194

ENGINEERING AND PRODUCTION CONTROL SYSTEMS



Company founder and president, Walter L. Myers (right), pictured with production engineer Joe Zellers who developed the production control software for the MSI computer system.

THE COMPANY:
MYERS SPRING COMPANY, INC.
LOGANSPORT, INDIANA

Myers Spring Company, Inc. was founded 35 years ago by Walter L. Myers for the manufacture of small mechanical springs which are used widely in mechanical appliances, electrical equipment, and by the automotive, construction, and many other industries. The Myers Spring company has grown to several million dollars in annual sales and employs approximately 50 people in its production facility.

Production engineer Joe Zellers comments, "we began looking at computer systems approximately ten years ago in order to keep up with the increasing demand of order processing, custom mechanical spring design engineering, and production control. In 1975, we selected the MSI system because they were the first company in the microcomputer industry to offer the necessary peripherals which would convert a microcomputer system into a usable business system. Since 1975, the MSI system has been expanded to accommodate four users simultaneously, performing a variety of plant monitoring functions and management programs."



The production facility at Myers Spring Co. is equipped with many automated machines for mechanical spring production.

"The system is equipped with 10 megabytes of hard disk storage presently and we plan to add an additional 10 megabytes of storage soon. The maximum downtime has been only one or two days in the 5 years that the system has been in operation. MSI has provided excellent technical support and willingness to help us with our special requirements. We have nothing but praise for MSI, they have provided excellent system support."

SPRING ENGINEERING AND DESIGN

"All of the production at Myers Spring is performed to exact customer specifications rather than to the manufacture of standard spring products. This causes an ever increasing demand for quick and efficient design and engineering capabilities. Many parameters have to be taken into consideration in the design of any particular spring, including wire size, wire type, material modulus, spring diameter, number of turns per inch, free length, spring loading, rate, solid height, working stress, working temperature, number of operating cycles, hysteresis, resonant frequency, expansion, and whether the spring has to be ground or not. It used to take over an hour for an engineer to design a spring taking into account all of these parameters. However, with the engineering software which we have developed for the MSI system, spring design can be completed in less than one minute by simply keying in the desired parameters. The MSI computer system *not only* designs the spring for us but prepares a complete quotation for the customer after consideration of the material to be used, the amount of waste, which equipment the production will use, the speed of the machines, the necessary labor rate, as well as the desired percentage of profit."



One of four workstations where design engineering, checking of sales order status, and production control monitoring is performed.

SALES QUOTATION SYSTEM

Following the computer spring design procedure, with automatic quotation feature, the actual production begins. Each quotation is reviewed and compared to actual job cost reports on the production run in order to make any necessary refinements in the quotation system software. This feature of our system has greatly improved our ability to prepare accurate quotations and to insure profitability of the company.

PRODUCTION CONTROL/JOB COST ACCOUNTING

Each production work order is tracked by the computer system at each stage of the production process. First, each order is checked against the customer quotation for accuracy. As each order is processed, exact shop labor time is recorded, for each production machine used, and each stage of the production process. Summary reports are produced showing the total amount of material used, time used on each production machine, amount of material used, and a total cost figure for each work order.

SALES SUMMARY REPORTS

The system is designed to produce monthly sales summaries which show the amount of products sold by each salesman, complete with dates, order numbers, type of product, quantity, type of material, material cost, sales commissions, etc. Totals for each desired category and for each salesman are reproduced.

ACCOUNTS RECEIVABLE SYSTEM

Each morning, invoices are generated for orders which will be shipped that day. The accounts receivable system maintains accounts for over 500 active customers. The system produces monthly statements complete with aging of open invoices.

MULTI USER CAPABILITY

The MSI system is equipped with four user terminals presently which are available for use simultaneously by the following departments: Order department, for entering new orders and checking order status. Inventory department, used for checking to see whether a particular product has been produced previously. Invoicing/Cost Accounting, used for preparation of invoices and for entry of labor and material cost accounting information. Design Engineering, used by company engineers to design new products.



Order entry, invoicing, monthly statements, and other management reports are carried out at this workstation at Myers Spring Co.



The MSI system at Myers Spring Company is equipped with 10 megabytes of hard disk memory, dual floppy disk drives, a high speed printer, and four user CRT terminal workstations.

GENERAL LEDGER TIE-INS

The MSI system automatically prepares journals for cost accounting information and sales data which can then be posted to the general ledger. Complete income statements and balance sheets are produced by the general ledger programs on the system.

MULTIPLE MANAGEMENT REPORTS

The MSI system is used in many different areas of the company in order to provide more efficient and effective management of our production facilities. Several of the reports which we obtain from the system are: **production schedules, due list for orders, new orders list, production summary by department, salesman's reports, individual customer reports and order histories, time studies, sales quotations, design engineering, sales summaries, customer statements, general ledger balance sheet and income statements.**

Consider MSI, evaluate us, talk to our users, and we think you'll buy your business system from us!

If you would like to know how an MSI business system can help you make your business more profitable, call or write, **MIDWEST SCIENTIFIC INSTRUMENTS, INC., 220 W. Cedar, Olathe, KS 66061, 800-255-6638, Telex 42525 or 437049**

MSI ..... Helping to make your business run better. ✓144

✓See List of Advertisers on page 194

You'll make a wise investment with this Microsoft Disk BASIC program that gives you portfolio values at a glance. Part 1.

Put Your Micro On Wall Street

By Dex Hart

PORTVAL is a short program written in Microsoft BASIC to simplify periodic evaluation of a common stock portfolio. If you are an experienced programmer, you may want to skip to something more complicated, like "Fourier Analysis of Three-Dimensional Boolean Hopscotch." Mine is simple stuff, because I'm relatively new to the game.

My advantage is that I remember every place I got hung up when I started, and I'll try to help those of you to whom this program is not instantly obvious. It doesn't really matter if you don't have a big, fat portfolio. Follow this program through and learn how to do at least *something* genuinely useful with BASIC. The forms used have wide general application.

This program lets you list your common stocks along with the purchase date, number of shares and initial investment. Every time you update current share prices (perhaps ten minutes total time for a dozen stocks *including* looking up prices in the morning paper), the program calculates current value, dollar difference between current value and initial cost for each stock and percentage gain for each stock from the date of purchase. Initial cost and current value are totaled, and the total dollar difference is shown along with the percentage gain or loss for the total list.

The sample run, for which I have arbitrarily selected five stock issues, clearly illustrates the output. The prices are real; the numbers of shares are for illustration only. Imagine what you'd have if you had hocked everything but your spouse and put it all in Humana in early 1977.

I live in Miami and am not a member of a computer club (the only one I know of locally is a hard-core Apple group). That makes learning a high-level language somewhat tougher. I decided to read several different BASIC books, on the theory that each author covers slightly different stuff. Good idea, and I ended up nominally "literate" in BASIC (I could generate nice tables of cubes, square roots and trig functions). But I *couldn't* write my portfolio program.

Value Line Investment Survey offered a free program to its computer-owning subscribers, a very simple program for 4K memory machines, listing Value Line ratings of timeliness, safety, and so forth. Lightning struck when I saw what they did with "print using." Microsoft literature shows many forms of print using, but each example is for a single string or numerical quantity. Turns out you can format a whole line with this command. I'll run through the program quickly and then elaborate on how to use print using, tossing in some other comments on using MBASIC along the way.

The Program

You enter the number of stocks, n, on line 30. Originally I dimensioned each variable in line 50 to the specific number before I realized you could use n; much neater. Lines 40 and 50 only come into play when you use array variables (those with parentheses) and need to count more than ten (ten or more passes through the loop). With MBASIC, no DIM statement is needed for a subscript of 10 or less. Line 40 isn't really necessary, as no harm is done by an unneeded dimension statement; lines 70–90 show a loop to read the infrequently changed data. The list of variables is shown in Table 1. Note that the thimble I used to list the program on my

'PORTVAL'..... Portfolio Valuation.....Prices as of 31 Dec 80

	Stock	Date	Shares	Cost	Price	Value	Diff	%Gain
1	Carlisle	29Sep80	160	9991	84.0	13440	3449	34.5
2	Crown Cork	18Mar71	100	2231	28.4	2840	609	27.3
3	Humana	7Mar77	900	4900	71.4	64260	59360	1211.4
4	Kysor	18Dec69	200	2758	10.6	2120	-638	-23.1
5	Travelers	2Dec68	100	3511	38.9	3890	379	10.8
**********								
Totals				23391		86550	63159	270.0

Sample run.

Address correspondence to Dex Hart, 9414 SW 142 St., Miami, FL 33176.

Spinwriter makes parentheses look a bit like brackets. They are not.

When I first wrote the program, I was pretty dense. I wrote it in what I now call "column input," meaning you read in data one column at a time, as opposed to "row input." Each of the variables in line 80 had to have its own loop and the DATA statements were all of a kind: first n stock names, then n dates, and so on. It works, but it's a bitch when you want to change a stock (as when you buy or sell). I had to count into a massed hunk of numbers to enter or excise data.

With row input as shown, each stock has its own line. Want to sell Kysor? Delete line 130. Add Texaco? Enter the four data items on a new line 135. Type RENUM and your numbers are back to the start 10/increment 10 shown on my listing, chosen, by the way, so you can use the AUTO line numbering function on disk MBASIC.

For inputting the current price I go back to column input (data on line 190). Just enter n prices in order; take as many lines as needed. Enter the date of the prices, D1$, as item n+1. For large portfolios, data lines of ten items each make keeping track easier. This program is especially easy to follow because it doesn't jump around with GOTOs and branching: two sets of READ-DATA lines, then the arithmetic section inside its own loop (lines 210–290), then print to screen (lines 310–490), and finally the hard-copy section if you so elect (lines 510–730). Keeping LPRINT lines clustered in one spot makes it easier to include or skip the hard-copy operation.

Note on line 510 that there is a comma before J instead of the usual semicolon. The semicolon causes the machine to print a question mark; the comma suppresses the question mark. A couple of blanks following the word RETURN moves the cursor over so the final word is more easily read. These are minor, but interesting, items. Note that you can print a string to the screen inside the INPUT statement. You don't have to PRINT the string and then follow with the INPUT line.

Line 300 is a clear screen command (for my Superbrain); your machine may be different or you may have a CLS command (TRS) to do the same thing. It's not necessary, but if you are listing a short portfolio, you get rid of any leftover listing clutter at the top of the screen. In MBASIC (and others,), a remark can be added to a command line (as on line 300) by preceding it with an apostrophe. This doesn't work on DATA lines. The price date entered on line 190 is printed on the screen (line 310) and on the hard copy (line 550).

A$—stock name
D$—purchase date
S—number of shares
C—initial total cost (not per-share cost) in dollars
P—current price (dollars and tenths of dollars)
V—current value (P times S)
D—dollar difference (V minus C)
G—percentage gain or loss
D1$—current date to be typed on the hard copy for records' purposes
T1—total of the C column
T2—totals of the V column
T3—difference (T2 minus T1)
T4—overall percentage gain or loss

Table 1. List of variables.

Print Using

PRINT USING (and LPRINT USING) are the keys to putting a lot of columns on a page, exactly where you want them, and in the format in which you want them (rounded and decimal places as specified). You can format the whole line by using separate lines followed by a semicolon to keep the machine from line-indexing (as I did on the listing), or you can spread all the formatting out on one line if you so choose. In other words, lines 410–440 could be replaced by the single line:

```
410 PRINT USING"##.# ##### ##### ####.#
    ";P(I);V(I);D(I);G(I)
```

Spacing is determined by the number of blanks between the "number" symbols which represent digits, or by the number of blanks between the symbols and the close-quote mark. If you don't allow enough room (if the number to be printed is too big), the machine will prefix the number with a percent sign. Fix it. Lines 480–490 show two format columns on each line. They could have been written as one line or as four, with the first three terminating in semicolons.

Backslashes identify the string format. Backslash–eight spaces–backslash allows a ten-character string. The two sets of backslashes (lines 370–380) are for A$(I) stock name and D$(I) purchase date. Characters beyond the space allocated are discarded. Note on lines 100–140 that strings need not be within quotation marks in MBASIC, unless left justification is not satisfactory. Where the day of the month is a single digit, I used quote marks to retain the leading blank so that the month and year line up properly on the printed table.

Other minor items: underlining lines (I used asterisks) such as line 460 could be split in two. Just terminate the first half with a semicolon following the close-quote. Line 330 could likewise be split. In line 480, the "tab (n-spaces)" simply starts the printing that far from the left margin. More blank spaces following the

OSI (8K) APPLE TRS-80†



Computers & Gambling Products Magazine

PRESENTS:

PROBABILITY HANDICAPPING DEVICE 1 — A BASIC PROGRAM FOR: HORSE RACE HANDCAPPING!

This incredible program was written by a professional software consultant to TRW Space Systems. This is a complex program carefully human factored for easy use. It is a comprehensive horse racing system for spotting overlays in thoroughbred sprint races. Your computer will accurately predict the win probability and odds line for each horse based on your entries from the racing form. The next day overlaid horses can be spotted on the track tote board. The user's manual contains a complete explanation of overlay betting plus much more useful information. The appendix contains a detailed tab run of a 100 consecutive race system workout showing **an amazing 50% return** ($1.50 returned for each $1.00 flat wager.) Includes many features such as erfor correction, bubble sort, line printer output, automatic keyboard debounce, archiving, etc. The manual may be ordered separately for perusal for $7.95 and credit.

CHALLENGER 1P, 2P, or 4P 8K VERSIONS Now Available!
Phd-1 User's manual and cassette for:
Apple II (16K), TRS-80 Level II (16K), Challenger (8K) 29.95
TRS-80 or APPLE DISK 34.95

BRAND NEW FROM SDL: WIN AT THE RACES. This thoroughbred handicapping algorithm is based on a currently popular book on thoroughbred multiple regression techniques. Both sprints and routes. All of the features of PHD-1 plus more. This program incorporates the best data entry technique we've ever seen.
32K TRS-80 or APPLE CASSETTE 34.95
32K TRS-80 or APPLE DISK 39.95

BOOKS:
Winning at the Races 21.95 + .75 P&H
Beating the Races with a Computer 14.95 + .75 P&H

Make checks payable to **JOE COMPUTER DEPT K** ✓247
22713 Ventura Blvd., Suite F, Woodland Hills, CA 91364
CA residents add 6 % sales tax.
PHONE ORDERS: 213-992-0514

*SEND $2.00 TO PLACE YOUR NAME ON OUR MAILING LIST.
†*TRS-80 is a registered trademark of Tandy Corporation.*

✓See List of Advertisers on page 194

ANNOUNCING MMSFORTH VERSION 2.0:
MORE FOR YOUR RADIO SHACK TRS-80 MODEL I OR MODEL III !

★ **MORE SPEED**
10-20 times faster than Level II BASIC.

★ **MORE ROOM**
Very compact compiled code plus VIRTUAL MEMORY makes your RAM act larger. Variable number of block buffers. 31-char.-unique wordnames use only 4 bytes in header!

★ **MORE INSTRUCTIONS**
Add YOUR commands to its 79-STANDARD-plus instruction set! Far more complete than most Forths: single & double precision, arrays, string-handling, clock, more.

★ **MORE EASE**
Excellent full-screen Editor, structured & modular programming
Word search utility
Optimized for your TRS-80 with keyboard repeats, upper/lower case display driver, full ASCII, single- & double-width graphics, etc.

★ **MORE POWER**
Forth operating system
Interpreter AND compiler
8080 Assembler
(Z80 Assembler also available)
Intermix 35- to 80-track disk drives
Model III System can read, write & run Model I diskettes!
VIRTUAL I/O for video and printer, disk and tape (10-Megabyte hard disk available)

MMSFORTH

THE PROFESSIONAL FORTH FOR TRS-80
(Over 1,500 systems in use)

Prices:
MMSFORTH Disk System V2.0 (requires 1 disk drive & 16K RAM, 32K for Model III) . . . **$129.95***
MMSFORTH Cassette System V2.0 (requires Level II BASIC & 16K RAM) **$89.95***

AND MMS GIVES IT PROFESSIONAL SUPPORT

Source code provided
MMSFORTH Newsletter
Many demo programs aboard
MMSFORTH User Groups
Inexpensive upgrades to latest version
Programming staff can provide advice, modifications and custom programs, to fit YOUR needs.

MMSFORTH UTILITIES DISKETTE: includes FLOATING POINT MATH (L2 BASIC ROM routines plus Complex numbers, Rectangular-Polar coordinate conversions, Degrees mode, more), plus a full Forth-style Z80 ASSEMBLER; plus a powerful CROSS-REFERENCER to list Forth words by block and line. All on one diskette (requires MMSFORTH V2.0, 1 drive & 32K RAM) **$39.95***

THE DATAHANDLER V1.1: a very sophisticated database management system operable by non-programmers (requires MMSFORTH V2.0, 1 drive & 32K RAM) **$59.95***

MMSFORTH GAMES DISKETTE: real-time graphics & board games w/source code. Includes BREAKFORTH, CRASHFORTH, FREEWAY, OTHELLO & TICTACFORTH (requires MMSFORTH V2.0, 1 drive & 32K RAM) **$39.95***

Other MMSFORTH products under development

FORTH BOOKS AVAILABLE

MicroFORTH PRIMER - comes with MMSFORTH; separately **$15.00***
USING FORTH - more detailed and advanced than above **$25.00***
THREADED INTERPRETIVE LANGUAGES - advanced, excellent analysis of MMSFORTH-like language, ... **$18.95***
PROGRAM DESIGN & CONSTRUCTION - intro. to structured program, good for Forth . . . **$8.95***
FORTH -79 STANDARD MANUAL - official reference to 79 – STANDARD word set, etc . . **$10.00***
CALTECH FORTH MANUAL - good on Forth *internal* structure, etc **$10.00***
FORTH SPECIAL ISSUE, BYTE Magazine (Aug. 1980) - we stock this collector's item for Forth users and beginners **$4.00***

* - ORDERING INFORMATION: Software prices include manuals and require signing of a single system, single-user license. SPECIFY for Model I or Model III! Add $2.00 S/H plus $1.00 per additional book; Mass. orders add 5% tax. Foreign orders add 20%. UPS COD, VISA & M/C accepted; no unpaid purchase orders, please.

Send SASE for free MMSFORTH information
Good dealers sought
Get MMSFORTH products from your computer dealer or

MILLER MICROCOMPUTER SERVICES (M6) ✓255
61 Lake Shore Road, Natick, MA 01760
(617) 653-6136

open-quote mark would have accomplished the same thing—just not quite as neatly.

If the column headings in line 330 don't line up with the columns, move things about until they do. Do this tidying on the screen, not on the hard-copy lines. When the screen version is perfect, then do a virtual copy for the LPRINT section. I find it easiest to initially number the LPRINT lines 1000 higher than their matching PRINT line. And I use EDIT 330 instead of LIST 330 be-

```
10 REM ******  "PORTVAL"  ******
20 CLEAR
30 N=5
40 IF N<=10 GOTO 60
50 DIM A$(N),D$(N),S(N),C(N),P(N),V(N),D(N),G(N)
60 RESTORE
70 FOR I=1 TO N
80 READ A$(I),D$(I),S(I),C(I)
90 NEXT I
100 DATA Carlisle, 29Sep80,160,9991
110 DATA Crown Cork,18Mar71,100,2231
120 DATA Humana," 7Mar77",900,4900
130 DATA Kysor,18Dec69,200,2758
140 DATA Travelers," 2Dec68",100,3511
150 FOR I=1 TO N
160 READ P(I)
170 NEXT I
180 READ D1$
190 DATA 84.0,28.4,71.4,10.6,38.9,30 Dec 80
200 T1=0:T2=0:T3=0:T4=0
210 FOR I=1 TO N
220 V(I)=S(I)*P(I)
230 D(I)=V(I)-C(I)
240 G(I)=100*D(I)/C(I)
250 T1=T1+C(I)
260 T2=T2+V(I)
270 T3=T3+D(I)
280 T4=100*T3/T1
290 NEXT I
300 PRINT CHR$(12)        'clear screen
310 PRINT"'PORTVAL'  ......   Portfolio Valuation....prices as of ";D1$
320 PRINT
330 PRINT"    Stock        Date  Shares  Cost  Price  Value    Diff   %Gain"
340 PRINT
350 FOR I=1 TO N
360 PRINT USING"##  ";I;
370 PRINT USING"\         \  ";A$(I);
380 PRINT USING"\      \  ";D$(I);
390 PRINT USING"###  ";S(I);
400 PRINT USING"#####  ";C(I);
410 PRINT USING"##.#   ";P(I);
420 PRINT USING"#####   ";V(I);
430 PRINT USING"#####  ";D(I);
440 PRINT USING"####.#";G(I)
450 NEXT I
460 PRINT"*************************************************************************"
470 PRINT "Totals";
480 PRINT TAB(29)USING" ######        ######   ";T1;T2;
490 PRINT USING"#####   ###.#";T3;T4
500 PRINT

510 INPUT "Herd copy?—YES enter 1 (printer on!)—NO hit RETURN  ",J
520 IF J=1 THEN 550 ELSE 540
530 GOTO 550
540 END
550 LPRINT"'PORTVAL'..... Portfolio Valuation.....Prices as of ";D1$
560 LPRINT
570 LPRINT"   Stock         Date  Shares Cost  Price  Value    Diff   %Gain"
580 LPRINT
590 FOR I=1 TO N
600 LPRINT USING"## ";I;
610 LPRINT USING"\         \  ";A$(I);
620 LPRINT USING"\      \  ";D$(I);
630 LPRINT USING"###  ";S(I);
640 LPRINT USING"#####  ";C(I);
650 LPRINT USING"##.#   ";P(I);
660 LPRINT USING"#####   ";V(I);
670 LPRINT USING"#####  ";D(I);
680 LPRINT USING"####.#";G(I)
690 NEXT I
700 LPRINT"*************************************************************************"
710 LPRINT"Totals";
720 LPRINT TAB(28)USING" ######        ######   ";T1;T2;
730 LPRINT USING"#####   ###.#";T3;T4
740 GOTO 540
```

Program listing. PORTVAL stock portfolio program in Microsoft BASIC.

we carry it all....

everything for Commodore and Atari

Atari® Software


VisiCalc	149
CX4101 Invitation to Programming 1	17
CX4104 Mailing List	17
CX4102 Kingdom	13
CX4103 Statistics	17
CX4105 Blackjack	13
CX4106 Invitation to Programming 2	20
CX4107 Biorhythm	13
CX4108 Hangman	13
CX4109 Graph It	17
CX4111 Space Invader	17
CX4110 Touch Typing	20
CX4115 Mortgage & Loan Analysis	13
CX4116 Personal Fitness Program	13
CX4117 Invitation to Programming 3	20
CX4118 Conversational French	45
CX4119 Conversational German	45
CX4120 Conversational Spanish	45
CX4121 Energy Czar	13
CX4125 Conversational Italian	45
CX8108 Stock Charting	20
CXL4001 Educational System Master	21
CXL4002 Basic Computing Language	46
CXL4003 Assembler Editor	46
CXL4004 Basketball	30
CXL4005 Video Easel	30
CXL4006 Super Breakout	30
CXL4007 Music Composer	45
CXL4009 Chess	30
CXL4010 3-D Tic-Tac-Toe	30
CXL4011 Star Raiders	33
CXL4015 TeleLink	20
Talk & Teach Courseware: CX6001 to CX6017	23

Atari® Peripherals:

400 16K	$349
410 Recorder	59
810 Disk	469
815 Disk	1199
822 Printer	359
825 Printer	629
830 Modem	159
850 Interface Module	139

Atari® Accessories

CX853 16K RAM	89
CX70 Light Pen	64
CX30 Paddle	18
CX40 Joystick	18
CX86 Printer Cable	42
CO16345 822 Thermal Printer Paper	5
CAO16087 825 80-col. Printer Ribbon (3/box)	17
Microtek 16K RAM	79
Microtek 32K RAM	179

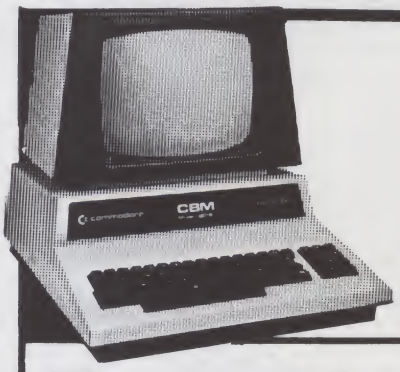

commodore

VIC-20	$ 279
4032N	1080
8032	1499
CBM 4022 Printer	669
CBM 4040 Drive	1039
CBM 8050 Drive	1449
CBM C2N Drive	87
PET-IEEE Cable	37
IEEE-IEEE Cable	46



ATARI 800™ with 32K RAM only $759

Disks

Maxell Disks	10 for $36
Syncom Disks	10 for 29
Atari Disks	5 for 22

Software

EBS Accounts Receivable Inventory System	$595
OZZ Information System	329
BPI General Ledger	329
Tax Package	399
Dow Jones Portfolio Management	129
Pascal	239
WordPro 3 (40 col.)	186
WordPro 4 (80 col.)	279
WordPro 4 Plus (80 col.)	339
Wordcraft 80	319

Printers

NEC 5530	2495
Diablo 630	2195
Trendcom 100	299
Starwriter	$1495
Trendcom 200	489
Paper Tiger 445G	769
Paper Tiger 460G	1219
Epson MX-80	499
Tally 8024	1699

No Risk -

No Deposit On Phone Orders -

COD or Credit Card - Shipped Same Day You Call*

Prepaid Orders Receive Free Shipping

Please Call Between 11AM & 6PM (Eastern Standard Time)

(800) 233-8950

VISA master charge


* on all in stock units

Computer Mail Order ✓384 **501 E. Third St., Williamsport, PA 17701 (717) 323-7921**

✓See List of Advertisers on page 194

Big sale on K's!

16K...$149.95
32K...$199.95
48K...$249.95
64K...$299.95



New JAWS-IB
The Ultrabyte Memory Board

Due to the tremendous success of our JAWS I, we were able to make a special purchase of first-quality components at below-cost prices for JAWS-IB. And we are sharing our cost saving with you. But don't be surprised if the next time you see this ad the prices have gone up substantially. Better yet, order now, and get the best memory on the market at the best price on the market.

ONE CHIP DOES IT ALL
Jaws-IB is the Rolls-Royce of all the S100 dynamic boards. Its heart is Intel's single chip 64K dynamic RAM controller. Eliminates high-current logic parts . . delay lines . . . massive heat sinks . . . unreliable trick circuits. JAWS-IB solves all these problems.

LOOK WHAT JAWS-IB OFFERS YOU
Hidden refresh . . . fast performance . . . low power consumption . . . latched data outputs . . . 200 NS 4116 RAM's . . . on-board crystal . . . RAM Jumper selectable on 8K boundaries . . . fully socketed . . . solder mask on both sides of board . . . phantom line . . . designed for 8080, 8085, and Z80 bus signals . . . works in Explorer, Sol, Horizon, as well as all other well-designed S100 computers.

10-DAY MONEY-BACK TRIAL: Try a fully wired and tested board for 10 days — then either keep it, return it for kit, or simply return it in working condition.

Continental U.S.A. Credit Card Buyers Outside Connecticut:
TO ORDER CALL TOLL FREE 800-243-7428
From Connecticut Or For Assistance:
(203) 354-9375 K6

Please send the items checked below:

JAWS-IB kit:
☐ 16K. $149.95*
☐ 32K. $199.95*
☐ 48K. $249.95*
☐ 64K. $299.95*

JAWS-IB Fully Assembled, Wired & Tested:
☐ 16K. $179.95*
☐ 32K. $239.95*
☐ 48K. $299.95*
☐ 64K. $359.95*

☐ EXPANSION KIT, 16K RAM Module, to expand JAWS-IB in 16K blocks up to 64K. **$59.95**

**All prices plus $2 postage and insurance ($4.00 Canada). Connecticut residents add sales tax.*

Total enclosed: $ _____

☐ Personal Check ☐ Money Order or Cashier's Check
☐ VISA ☐ Master Card (Bank No.)

Acct. No. _____ **Exp. Date** _____

Signature _____

Print Name _____

Address _____

City _____

State _____ **Zip** _____

NETRONICS R&D Ltd.
333 Litchfield Road, New Milford, CT 06776

cause the edit (hit the return again to print the line) doesn't leave an "OK" or "ready" line in between. Then when I type 1330, it is easier to copy the line now directly above; I just substitute the hard-copy LPRINT for the screen-copy PRINT command.

The purpose of the plus-1000 numbering is to make the many initial spacing adjustments easier. If you have trouble on line 1420, you know you can solve it by comparing it to line 420. Once you've got screen and hard-copy spacing down it will never have to be changed—unless your portfolio grows so much you have to add more room for those larger numbers!

After you've checked the hard-copy layout and made any minor spacing corrections necessary, you can RENUM. For those of you who haven't used the RENUM command, learn it. It not only renumbers line numbers, but automatically changes any GOTO or IF-THEN-ELSE numbers. It is a joy to watch.

Before I figured out that I could use PRINT USING to format neat tables, I thought I had to have VisiCalc or T-Maker to make a many-columned table with "field arithmetic" operations. Not so. Once you understand this program you can make most tables you need. Most arithmetic commands are fairly obvious, and in addition to those shown here, you can average, calculate weighted averages and do other common manipulations. One operation that may not seem simple at first glance is totaling a column. Look at line 250: T1 = T1 + C(I). This is the command to total all the initial dollar costs. It wasn't obvious to me. If it's not to you, I'll lay out a numerical example that I found helpful.

Totaling a Column

Assume you have three numbers: C(1) is 5; C(2) is 7; C(3) is 6. In a loop, where n = 3, you would say "FOR I = 1 to N/T1 = T1 + C(I)/next I." OK. Initially T1 is zero (as you said in line 200). So for the first pass, T1 = zero + C(1) or zero + 5. You're really saying the *new* T1 is the sum of the *old* T1 plus some number (identified to the computer by its subscript i). The machine indexes and makes pass number 2; the *current* T1 is now 5 and you say the next T1 = 5 + C(2) or 5 + 7. After two passes, the "newest" T1 is 12.

One more pass. T1 will become the existing T1 (that is, 12) plus C(3). The most up-to-date T1 becomes the second pass T1 plus 6, or 12 plus 6. Yes, I know you did it in your head. And you're right: the final value of T1 is 18. What the machine will call T1 (and will print when you call for T1) is the final, or most recent, value. That's what is stored in its electronic pigeonhole labeled T1.

Stock split? Just change shares, S, for the stock involved, use the new lower price. No other change is necessary, as the total initial dollar cost is, of course, unchanged. No special effort has been made to identify stocks as long-term or short-term. Since the holding period is currently one year, a glance at the acquisition date makes the status obvious. Active traders, for whom this tax status is a key consideration, may want to run separate portfolios of long- and short-term stocks, switching listings as necessary. I find it helpful to list stocks alphabetically by exchange to make looking up prices faster. First NYSE, then American, then over-the-counter.

Coming Attractions

Next month I'll give you an even shorter program called TIMEGAIN, which will demonstrate how to CHAIN to another program, passing selected variables to it. TIMEGAIN has no variables of its own. If you have several different portfolio valuation programs, you can run TIMEGAIN with any of them, with no data additions ever. This is done by storing some "old" price data in a revised PORTVAL, even though it is not used there. It's just easier to do it that way.

What is TIMEGAIN? It evaluates the performance of your portfolio over a fixed time period, not from the varying purchase dates of your stocks. You can, for example, follow dollar differences and percentage gains from the last day of one month to the last day of the next. It answers the question, "But what have my stocks done for me lately?" Just because it seemed like a nice idea, I've also added a "percent of portfolio" column.

These are simple programs which will not make buy-or-sell decisions, but will make it easy for you to see long-term and current performance, for individual stocks as well as for the total portfolio. The key idea is that updating is so easy, you'll do it on a regular basis. Your decisions should be better simply because you have up-to-date management information, nicely presented.■

MCP

S-100 CARD NOW AVAILABLE IN KIT OR AS BARE BOARDS. YOU CAN'T BEAT THESE PRICES FOR OEM QUALITY. ALL ARE CP/M® AND IEEE/S100 COMPATIBLE.

S-100 CARD NOW AVAILABLE IN KIT OR AS BARE BOARDS. YOU CAN'T BEAT THESE PRICES FOR OEM QUALITY. ALL ARE CP/M® AND IEEE/S100 COMPATIBLE.

THE MCP/SOC Z80 CPU CARD FEATURES:
TWO SERIAL PORTS WITH RS232 DRIVE AND HANDSHAKING. BAUD RATES FROM 50 TO 19.2K. AN 8255 PROGRAMMABLE PARALLEL INTERFACE, 1K ONBOARD STATIC RAM AND 1K EPROM, WITH MONITOR PROGRAM FOR SERIAL TERMINAL INCLUDED. 2K 2716 EPROM OPTIONAL. ONBOARD RAM/EPROM OPERATE IN SHADOW MODE TO ALLOW 64K ADDRESSING. OPERATES AT 2 OR 4 MHZ.
ASSEMBLED AND TESTED **$299.95**
BARE BOARD **$65.00; KIT INCLUDING EPROM $249.95**

HIGH PERFORMANCE MCP/SCC-6 NOW AVAILABLE:
INCLUDES FEATURES OF THE MCP/SCC Z80 CPU CARD. PLUS THE 2716 EPROM AND MONITOR ARE STANDARD. THIS CARD FEATURES THE Z80B CPU AND WILL OPERATE AT 2, 4 OR 6 MHZ.
ASSEMBLED AND TESTED **$369.95**
BARE BOARD **$65.00; KIT INCLUDING EPROM $299.95**

THE MCP/FDC DOUBLE DENSITY DISK CONTROLLER:
UTILIZES THE WD1793 DOUBLE DENSITY F/D CONTROLLER CHIP AND THE WD1691 FLOPPY SUPPORT LOGIC CHIP. THIS CHIP SET OFFERS SUPERB PERFORMANCE AND RELIABILITY DUE TO ENHANCED DATA RECOVERY AND WRITE PRECOMP SUPPORT. THE MCP/FDC WILL SUPPORT UP TO FOUR 8" SINGLE OR DOUBLE SIDED SHUGART OR SHUGART COMPATIBLE DRIVES. THE MCP/FDC OPERATES IN SINGLE OR DOUBLE DENSITY MODE WITH 4 AND 6 MHZ SYSTEMS.
ASSEMBLED AND TESTED **$299.95**
BARE BOARD **$65.00**

THE MCP/VDB 80 x 24 VIDEO BOARD FEATURES:
A 7 x 9 CHARACTER MATRIX WITH LOWERCASE DESCENDERS, MEMORY MAPPED WITH 2K ONBOARD RAM, KEYBOARD INPUT PORT, PROGRAMMABLE FORMAT, HARDWARE SCROLL, NON DESTRUCTIVE CURSOR WITH 2 BLINK RATES, AND REVERSE VIDEO.
ASSEMBLED AND TESTED **$259.95**
BARE BOARD **$65.00; KIT $209.95**

COMPLETE MCP 80/100 MAINFRAMES, DUAL 8" SINGLE OR DOUBLE SIDED SHUGART DISK. (CALL FOR LOW PRICE)

CP/M IS A REGISTERED TRADEMARK OF DIGITAL RESEARCH.

MCP
COMPUTER PRODUCTS

SUITE 444D
6992 EL CAMINO REAL
CARLSBAD, CA. 92008
PHONE (714) 438-3270

✓316 **MASTERCHARGE & VISA ACCEPTED**



INMAC INTRODUCES
THE SOLUTION TO YOUR MICRO SUPPLY AND ACCESSORY NEEDS.

- One-Stop Shopping. This new catalog offers over 1,000 products specifically for Micro Computers. Compatible with Apple, Atari, Northstar, TRS-80s and many others.
- Convenient Ordering. By mail or phone, ordering supplies and accessories from this catalog will be quick and easy.
- Fast Delivery. We'll ship your order within 24 hours from our distribution centers in New Jersey, California, Illinois and Texas. Overnight delivery available.
- Top Quality Products. Virtually all our products are guaranteed for at least one year. Risk-free trial of any product for 45 days.

Send for your FREE Inmac Catalog or call (408) 727-1970.

Inmac
Dept. Micro, 2465 Augustine Drive, Santa Clara, CA 95051 ✓223

FMG CORPORATION ✓70

Send for FREE CATALOG!

THE PASCAL/MT As Low As $250.00

- Compiler executes under the CP/M operating system in as little as 32 K bytes of RAM
- Interactive Symbolic Debugger which enables the programmer to examine variables, set a breakpoint, and trace procedure calls interactively at run time
- Compiles at the rate of 600 lines per minute on a 2 MHZ 8080
- Programs Execute up to 10 TIMES FASTER than popular interpretive Pascals
- The code generated is 8080 object code which is ROMable with a minimum run time overhead of 1.5K bytes
- Interrupt procedures allow the programmer to write interrupt drivers for I/O and other real time tasks in Pascal MT
- Bit manipulations of variables may be performed with the built-in procedures: SETBIT, CLRBIT, TSTBIT, SHL, SHR, SWAP, LO, HI.
- Assembly language subroutines may be called from Pascal MT
- Business arithmetic version of Pascal MT is also available
- Pascal data structures supported are ENUMERATION AND SUBRANGE TYPES, RECORD, ARRAY, REAL, INTEGER, CHAR, and BOOLEAN
- Not implemented are: SETS, GOTO, GET, PUT

VISA
M-451
master charge

BUSINESS CONTROL PROGRAMS
FROM THE ORIGINATOR OF THE TRS-80® PROJECT

FMG CORPORATION
P.O. Box 16020
Ft. Worth, TX
76133
(817) 294-2510

CP/M®2

- Enhanced Upward Compatible File System
- Powerful New Random Access Capabilities

FMG Corporation now offers the CP/M 2.2 for the TRS-80 Model II. From minidisks, floppy disks, all the way to high-capacity hard disks, the flexibility of CP/M 2.2 makes it a truly universal operating system. The package includes an 8" system disk, editor, assembler and debugger for the TRS-80 Model II.

AS LOW AS $200.00

BUSINESS

- General Ledger
- Payroll
- Accounts Payable
- Accounts Receivable

These business systems are designed with the business manager in mind! Totally screen oriented, they give complete user prompting as each entry is required. Major changes in your current bookkeeping method are not necessary to make these programs work for you.

AS LOW AS $500.00

CP/M is a registered trademark of Digital Research Corp. TRS-80 is a registered trademark of Radio Shack

✓See List of Advertisers on page 194

No complex hardware/software requirements needed to implement the time and date on your micro.

Clock/Calendar For the 6809

By David R. Rawson

This digital calendar/clock will keep track of the current time and supply all information from the year to the second. This even includes the day of the week. A small rechargeable Nicad battery pack keeps the clock functioning during computer off-time.

The described application is for a 6809 processor running under Flex 9.0; however, it should be easy to adapt to other systems and processors.

Two listings provide the software for Flex 9.0 support. Listing 1 shows the method of setting the clock initially and after a power loss.

The amount of support electronics required is small, consisting of a parallel interface and a few resistors and capacitors.

The complete circuit (see Fig. 1) was assembled on a Percom I/O prototype board for the SS-50 bus. There are only three ICs on the board, including the power supply. The largest is a 6821 PIA (parallel interface adapter), which interfaces the clock to the computer bus, handling data, control and address information for the clock circuit. The next is the MSM5832 calendar/clock IC, which requires a 32.768 kHz crystal similar to the type used in digital watches. The last IC is an LM340T-5 regulator for the 5-volt supply.

The heart of the clock is the MSM5832 microprocessor real-time clock/calendar IC made by OKI Semiconductor, 1333 Lawrence Expressway, Santa Clara, CA 95051. I chose this IC because it interfaces easily to the 6809, requires minimal software and has many features. Some of these features include a leap year register, 12- or 24-hour format, a single 5-volt supply, a reliable battery backup (to Vcc = 2.2 volts), low power dissipation (2.5 mW max.) and an 18-pin DIP package.

This IC greatly simplifies the circuit when compared to other designs recently published. No level shifting is required when connecting any of the data, control or address lines to TTL-compatible loads. Also, the clock has a hold function that stops operation during a read or write; this prevents confusing updates of data. The register data is static and no digit scanning is used. This means that any digit is available for reading at any time.

The MSM5832 can also generate timed interrupts. Table 1 gives the list of conditions and possible intervals. When using a PIA as the interface, you can simply connect the desired output to the appropriate interrupt line (CA1, CB1). The selection of the rate could even be under software control by using the spare I/O

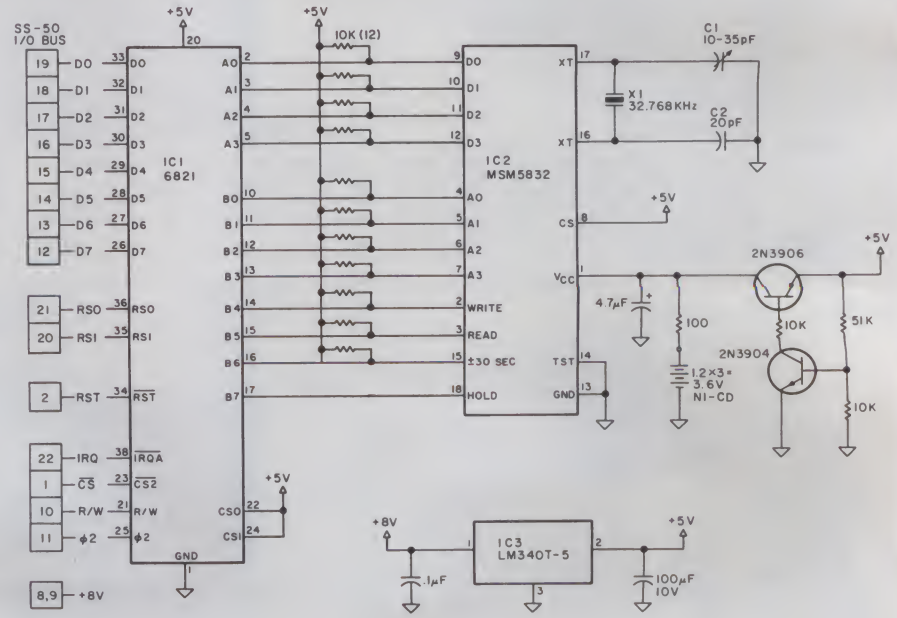


Fig. 1.

David R. Rawson, 1825 Gary, Wichita, KS 67219, is a computer hobbyist and flight simulator technician.

lines and a switching circuit. I don't use this as yet, but I do plan to incorporate it in the future.

Hardware Design

The schematic is shown in Fig. 1. The PIA connections to the I/O bus are standard; however, I have labeled the functions and pin numbers on the schematic. The A side of the PIA is used for data transfers to and from the clock IC. It is configured as an input or output depending on the current function. It connects to the four clock-data lines. The high-order data lines are unused and their status is masked during a read.

The B side of the PIA is divided into two four-bit parts. The low-order bits are used to address the registers in the clock, and are therefore connected to the address lines. The high-order bits are used for controlling the hold, read and write functions. All of the data, address and control lines are tied to +5 through a 10k resistor, since they are tied low by the clock IC. The crystal and load capacitors connect to pins 16 and 17 to complete the oscillator circuit.

C1 allows minor trimming of the 32.768 kHz oscillator. The chip select pin labeled $\overline{CS}$ (8) ties directly to +5. This is because the threshold on this pin is set higher than any other pin. This means that when the computer is turned off and the power supply drops to zero, the chip is deselected and the I/O pins are placed in the high-impedance state before anything can accidentally be changed by a processor in its death throes.

A two-transistor regulator charges the Nicads and supplies about 4.4 V to the clock IC. I used three 2/3 AA batteries for the backup supply. These require about 50 mA charge current for 14 hours to reach full charge. You can charge them prior to installation (be sure the circuit is ready to have power applied) or you can run the computer for a while to build up a good charge. I found the latter to be far more enjoyable. Either way, with a full charge, several months of standby operation is possible.

Construction is simple, using number 30 wire-wrap wire and point-to-point wiring. Component layout is not critical, so I oriented the ICs for the shortest distance between interconnected pins.

When the clock is completed, a frequency counter can be used to check and correct the 32.768 kHz oscillator using C1. This can be done with the board out of the computer, as accuracy only varies ±2 ppm between normal and battery operation.

Software Interface

The software required to make the clock operational is fairly simple and straightforward. Listing 1 is the program to set the clock. The label CLOCK refers to the address of the board. I used slot 4, so the address is $E010. Two Flex routines, GETCHR and PSTRNG, are used for communication with the operator's terminal. The following is a description of the flow of the program.

First, the PIA is initialized and set up with the A and B sides' outputs. Also, a check is run to see if a board has been installed in the computer. If one is not found the program states this and returns to Flex.

If all is OK so far, then each of the particulars for the current time is asked for. As each is input, it is compared to its maximum and checked to be sure it is a number, to catch input errors.

The operator is also asked if this is a leap year. If the answer is yes, then the proper bit is set in the D10 digit. I only use the 24-hour mode, so the proper flag is set in the H10 digit. Table 2 shows each register address, its limits and any special function bits.

After all data is entered, the opera-

Conditions	Output	Reference Frequency	Pulse Width
HOLD=L	D0	1024 Hz	50% duty
READ=H	D1	1 Hz	122.1 us
CS=H	D2	1/60 Hz	122.1 us
A0–A3=H	D3	1/3600 Hz	122.1 us

Note: 1024 Hz signal not affected by HOLD input. Others stop during HOLD.

Table 1. Clock/calendar registers, limits and data.

Address Inputs				Counter	Data I/O				Limits	Notes
A3	A2	A2	A0		D3	D2	D1	D0		
0	0	0	0	S1	X	X	X	X	0 to 9	S1 and S10 set to 0 on write.
0	0	0	1	S10		X	X	X	0 to 5	
0	0	1	0	MI1	X	X	X	X	0 to 9	
0	0	1	1	MI10		X	X	X	0 to 5	
0	1	0	0	H1	X	X	X	X	0 to 9	
0	1	0	1	H10	+	+	X	X	0 to 1/0 to 2	D2=1 for PM D3=1 for 24 hr D2=0 for AM D3=0 for 12 hr
0	1	1	0	W		X	X	X	0 to 6	days from Sunday
0	1	1	1	D1	X	X	X	X	0 to 9	
1	0	0	0	D10		+	X	X	0 to 3	D2=1 for leap year
1	0	0	1	M01	X	X	X	X	0 to 9	
1	0	1	0	M010				X	0 to 1	
1	0	1	1	YR1	X	X	X	X		
1	1	0	0	YR10	X	X	X	X		

Note: + =special function bits
X=significant bits

Table 2. Interrupt timer data.

tor is asked if he would like to reenter data for any mistakes. No data has been written to the IC at this point, so the entire entry sequence is repeated for a yes answer. A no answer will load data into the clock and will hold it there until released. This lets you synch it to some standard like WWV.

Listing 2 shows how Flex 9.0 is modified so that the clock chip is read for the start-up information instead of the normal operator entry. The first portion supplies the jump to the new sequence from the old one at $CA50. The PIA is then initialized as before, and the same check is made for an installed board. If no board is found, then the standard start-up sequence is used.

Assuming a board is in place, the clock data is then read into a buffer area. As each register is read it is masked to remove erroneous data bits. The appropriate numbers are moved to the Flex constants SYSDAY, SYSMON and SYSYR. Finally, each is output to the terminal as follows:

(HOME,CLEAR)
SIGN ON

The following is a list of suppliers and costs as of this writing for the main components.

Name	Address	Part	Catalog No.	Cost
Digi-Key Corp.	PO Box 677 Hiway 32 South Thief River Falls MN 56701	MSM5832 Crystal	MSM5832 KF36G	9.80 2.70
Percom Data	211 N. Kirby Garland, TX 75042	Proto Board		14.95

Listing 1.

```
**********************************************************
**********************************************************
**                                                      **
** THIS PROGRAM IS USED TO INITIALLY SET THE CLOCK/     **
** AND CALENDAR . IT  MAY ALSO BE USED IF SOME TYPE     **
** OF POWER OUTAGE HAS CAUSED THE CHIP TO LOSE DATA.    **
**                                                      **
**  THE PROGRAM ASSUMES THAT THE BOARD IS INSTALLED     **
** IN PORT #4 AT ADDRESS $E010, HOWEVER IF NO BOARD     **
** IS INSTALLED THE PROGRAM WILL SO STATE AND EXIT      **
** TO FLEX GRACEFULLY.                                  **
**                                                      **
**  ALL DATA MUST BE ENTERED AS TWO DECIMAL DIGITS.     **
** NUMBERS (10 SHOULD BE PREFACED WITH A '0'.           **
**   AUGUST 7,1980 WOULD BE ENTERED AS FOLLOWS          **
** (YEAR ? 19)80                                        **
** (MONTH?) 08                                          **
** (DAY  ?) 07                                          **
** PRINTING IN BRACKETS ARE THE COMPUTER PROMPTS        **
** DAY OF WEEK FROM SUNDAY REFER TO NUMBER OF DAYS      **
** PAST. EX FOR THURSDAY ENTER 4  (THIS IS A SINGLE     **
** DIGIT)                                               **
** HOUR IS IN 24 HOUR FORMAT SO 6:00 PM IS HOUR 18.     **
** SET MINUTES TO 1 OR 2 FROM PRESENT THEN TYPE ANY     **
** CHARACTER AT THIS MINUTE TO SYNC THE CLOCK.          **
**                                                      **
**********************************************************
**********************************************************

                    * FLEX ROUTINES *

                CD1E  PSTRNG  EQU    $CD1E
                CD15. GETCHR  EQU    $CD15
                CD03  WARMS   EQU    $CD03

                    * EXTERNAL EQUATES *

                0001  VERSION EQU    1

                E010  CLOCK   EQU    $E010

C100                          ORG    $C100

                    * MAIN PROGRAM *

C102 01                       FCB    VERSION
C103 17   00B4      TIME1     LBSR   INIT
C106 24   0A                  BCC    OK2         IF SET THEN NO BOARD
C108 30   8D 011C             LEAX   NOBD,PCR
C10C BD   CD1E                JSR    PSTRNG      REPORT THIS
C10F 7E   CD03                JMP    WARMS       EXIT
C112 30   8D 0100   OK2       LEAX   INTRO,PCR
C116 BD   CD1E                JSR    PSTRNG
C119 31   8D 01BF             LEAY   BLOCK,PCR LIST OF MAX FOR EACH DIGIT
C11D 30   8D 0120             LEAX   YEAR,PCR
C121 BD   CD1E                JSR    PSTRNG
C124 8D   70                  BSR    GET2
C126 30   8D 0120             LEAX   MONTH,PCR
C12A BD   CD1E                JSR    PSTRNG
C12D 8D   67                  BSR    GET2
C12F 30   8D 0120             LEAX   DAY,PCR
C133 BD   CD1E                JSR    PSTRNG
C136 8D   5E                  BSR    GET2
C138 30   8D 0120             LEAX   DOW,PCR
C13C BD   CD1E                JSR    PSTRNG
C13F 8D   51                  BSR    GET1
C141 30   8D 0129             LEAX   HOUR,PCR
C145 BD   CD1E                JSR    PSTRNG
C148 8D   4C                  BSR    GET2
C14A 30   8D 0129             LEAX   MINUTE,PCR
C14E BD   CD1E                JSR    PSTRNG
C151 8D   43                  BSR    GET2
C153 30   8D 0129             LEAX   LPYR,PCR
C157 BD   CD1E                JSR    PSTRNG
C15A BD   CD15                JSR    GETCHR
C15D 81   59                  CMPA   #'Y
C15F 26   08                  BNE    ON1         IF LEAPYEAR SET CLOCK BIT
C161 B6   C2E0                LDA    DAY10
```

More →

apple®

JULY FIREWORKS!

Disk Based System: Apple II or Apple II Plus with 48k RAM installed, Disk II with controller, DOS 3.3 _____ $1869

THE SOURCE® FREE! Buy the D.C. Hayes Micromodem II® for $379.95 and we'll give you The Source ($100 value) FREE!

EPSON MX-80 _____ $495

10 Dysan Diskettes in plastic library case, only _____ $43.75

SMARTERM® 80-column board $299

Mountain Computer CPS card $239.95

CALL TOLL FREE
(800) 621-5802

ERICKSON
COMMUNICATIONS ↙254
Chicago, IL 60630
5456 North Milwaukee Ave.
(312) 631-5181 (within Illinois)

MICROPROCESSOR SUPPORT I.C.'S

WE GUARANTEE FACTORY PRIME PARTS

We are going to become the largest supplier of prime microprocessor support I.C.'S. We guarantee that our I.C.'S are purchased from manufacturer authorized distributors. This is the only way to deliver prime parts at the lowest possible prices. Our committment is to offer the best price and the fastest delivery to our customer. We give many thanks to our valued customers who have helped us grow.

NEC 16Kx1 DYNAMIC RAM 200 N.S.

These are prime 4116's from one of the best MOS RAM manufacturers in the world.

4116 **200ns**

8 for $25.00 **32 for 96.00**

8080A	CPU	4.95	2708	EPROM 1Kx8	4.50
8085A	CPU	8.95	2716	EPROM 2Kx8	7.00
8086	CPU	99.95	2732	EPROM 4Kx8	19.00
8088	CPU	44.95	4118	STATIC 1Kx8	15.00
Z-80	CPU	6.70	4164	200ns 64Kx1	Call
Z-80A	CPU	7.25	Z80B	CPU	21.00

NEC 1Kx4 STATIC RAM 250 N.S.

These are prime low power static ram's NEC for the finest in MOS MEMORY.

2114L **250ns**

8 for $25.00 **32 for $96.00**

Z80-P10	6.00	8755	49.95	4050	.69	4531	.99	74C925	6.95	74LS107	.45	74LS244	1.95
Z80A-P10	7.10	4000	.35	4051	1.10	4532	1.25	74LS00	.35	74LS109	.45	74LS245	4.95
Z80-CTC	6.00	4001	.35	4052	1.10	4539	.99	74LS01	.28	74LS112	.49	74LS247	1.10
Z80ACTC	7.10	4002	.35	4053	1.10	4543	1.99	74LS02	.28	74LS122	.55	74LS248	1.10
Z80-DMA	18.50	4006	1.39	4055	3.95	4553	3.50	74LS03	.28	74LS123	1.19	74LS249	1.69
Z80A-DMA	22.50	4007	.29	4056	2.95	4555	.75	74LS04	.39	74LS125	1.35	74LS251	1.79
Z80-S10/0	18.50	4008	1.39	4059	9.95	4556	.75	74LS05	.28	74LS126	.89	74LS253	.98
Z80A-S10/0	22.50	4009	.49	4060	1.39	4581	1.99	74LS08	.39	74LS132	.79	74LS257	.98
Z80-S10/1	18.50	4010	.49	4066	.75	4582	1.01	74LS09	.39	74LS136	.59	74LS258	.98
Z80A-S10/1	22.50	4011	.35	4068	.35	4584	.55	74LS10	.28	74LS138	.89	74LS259	2.95
Z80-S10/2	18.50	4012	.29	4069	.35	4585	.99	74LS11	.39	74LS139	.89	74LS260	.69
Z80A-S10/2	22.50	4013	.49	4070	.49	4702	9.95	74LS12	.39	74LS145	1.25	74LS261	2.49
3205	3.95	4014	1.39	4071	.35	74C00	.39	74LS13	.47	74LS148	1.49	74LS266	.59
3242	10.00	4015	1.15	4072	.35	74C02	.39	74LS14	1.25	74LS151	.79	74LS273	1.75
8155	11.25	4016	.59	4073	.35	74C04	.39	74LS15	.39	74LS153	.79	74LS275	4.40
8185	29.95	4017	1.19	4075	.35	74C08	.49	74LS20	.26	74LS155	1.19	74LS279	.59
8185-2	39.95	4018	.99	4076	1.29	74C10	.49	74LS21	.38	74LS156	.99	74LS283	1.10
8202	45.00	4019	.49	4078	.35	74C14	1.65	74LS22	.38	74LS157	.99	74LS290	1.29
8205	3.95	4020	1.19	4081	.35	74C20	.39	74LS26	.39	74LS158	.75	74LS293	1.95
8212	2.00	4021	1.19	4082	.35	74C30	.39	74LS27	.39	74LS160	.98	74LS295	1.10
8214	3.95	4022	1.15	4085	1.95	74C32	.99	74LS28	.39	74LS161	1.15	74LS298	1.29
8216	1.85	4023	.38	4086	.79	74C42	1.85	74LS30	.26	74LS162	.98	74LS324	1.75
8224	2.65	4024	.79	4093	.99	74C48	2.39	74LS32	.39	74LS163	.98	74LS347	1.95
8226	1.85	4025	.38	4099	2.25	74C73	.85	74LS37	.79	74LS164	1.19	74LS348	1.95
8228	5.00	4026	2.50	4104	1.99	74C74	.85	74LS38	.39	74LS165	.89	74LS352	1.65
8238	5.45	4027	.65	4501	.39	74C85	2.49	74LS42	.79	74LS166	2.49	74LS353	1.65
8243	4.65	4028	.85	4502	1.65	74C89	4.95	74LS47	.79	74LS170	1.99	74LS363	1.49
8251A	5.55	4029	1.29	4503	.69	74C90	1.85	74LS48	.79	74LS173	.89	74LS365	.99
8253	9.85	4030	.45	4505	8.95	74C93	1.85	74LS51	.26	74LS174	.99	74LS366	.99
8255A	5.40	4031	3.25	4506	.75	74C95	1.85	74LS54	.35	74LS175	.99	74LS367	.73
8255A-5	5.40	4032	2.15	4507	.95	74C107	1.19	74LS55	.35	74LS181	2.20	74LS368	.73
8257	9.25	4033	2.15	4508	3.95	74C151	2.49	74LS73	.45	74LS190	1.15	74LS373	2.75
8257-5	9.25	4034	3.25	4510	1.39	74C154	3.50	74LS74	.59	74LS191	1.15	74LS374	2.75
8259A	7.30	4035	.95	4511	1.39	74C157	2.10	74LS75	.68	74LS192	.98	74LS375	.69
8271	60.00	4037	1.95	4512	1.39	74C160	2.39	74LS76	.45	74LS193	.98	74LS377	1.95
8275	32.95	4040	1.29	4514	3.95	74C161	2.30	74LS78	.65	74LS194	1.15	74LS385	1.95
8279	10.80	4041	1.25	4515	3.95	74C163	2.39	74LS83	.99	74LS195	.95	74LS386	.65
8279-5	10.80	4042	.95	4516	1.69	74C164	2.39	74LS85	1.19	74LS196	.89	74LS390	1.95
8282	6.70	4043	.85	4519	.99	74C173	2.59	74LS86	.45	74LS197	.89	74LS393	1.95
8283	6.70	4044	.85	4520	1.39	74C174	2.75	74LS90	.75	74LS221	1.49	74LS395	1.70
8284	5.85	4046	1.75	4522	.99	74C175	2.75	74LS92	.75	74LS240	1.95	74LS399	2.95
8286	6.70	4047	1.25	4526	1.15	74C192	2.39	74LS93	.75	74LS241	1.90	74LS424	2.95
8287	6.70	4048	.99	4527	1.75	74C193	2.39	74LS95	.88	74LS242	1.95	74LS668	1.75
8288	25.40	4049	.69	4528	.99	74C195	2.39	74LS96	.98	74LS243	1.95	74LS670	2.29
8289	49.95												

MAIL ORDERS SHOULD BE SENT TO:

13400 Northup Way 22 Bellevue Washington 98005

Telephone Orders & Inquiries 1-800-426-2668

Minimum Order $10.00 Add $3.00 Shipping

HANLEY ENGINEERING ~5

(206) 643-0792

13400 NORTHUP WAY 22

BELLEVUE, WASHINGTON 98005

FOR THE FINEST IN MICROPROCESSOR SUPPORT I.C.'S

Listing 1 continued.

```
C164 8A 04          ORA   #$4       BIT IS IN MONTH DATA
C166 B7 C2E0        STA   DAY10
C169 B6 C2E3  ON1   LDA   H10       24 HOUR FORMAT ONLY
C16C 8A 08          ORA   #$8       SO SET BIT IN HOURS
C16E B7 C2E3        STA   H10
C171 30 8D 014C     LEAX  ERROR1,PCR WANT TO REDO
C175 BD CD1E        JSR   PSTRNG
C178 BD CD15        JSR   GETCHR
C17B 81 59          CMPA  #'Y
C17D 27 84          BEQ   TIME1
C17F 8D 5E          BSR   SET       PUT DATA IN CLOCK
C181 30 8D 0106     LEAX  START,PCR
C185 BD CD1E        JSR   PSTRNG
C188 BD CD15        JSR   GETCHR    DON'T RELEASE CLOCK UNTIL TOLD TO
C18B 4F             CLRA
C18C B7 E012        STA   CLOCK+2   RELEASE HOLD
C18F 7E CD03        JMP   WARMS

                  * SUBROUTINES *
C192 C6 01    GET1  LDB   #1
C194 20 02          BRA   GET
C196 C6 02    GET2  LDB   #2
C198 BD CD15  GET   JSR   GETCHR    GET TWO NUMBERS AND VERIFY LIMITS
C19B 81 30          CMPA  #$30      THEN STORE IN DATA BLOCK
C19D 2D 12          BLT   G2ERR
C19F 81 39          CMPA  #$39
C1A1 2E 0E          BGT   G2ERR
C1A3 80 30          SUBA  #$30
C1A5 A1 2B          CMPA  11,Y      COMPARE TO LIMIT
C1A7 2E 08          BGT   G2ERR
C1A9 A7 A0          STA   ,Y+       THEN STORE
C1AB 5A             DECB
C1AC 27 02          BEQ   RTN1
C1AE 20 E8          BRA   GET
C1B0 39       RTN1  RTS
C1B1 30 8D 00F9 G2ERR LEAX ERRORS,PCR
C1B5 BD CD1E        JSR   PSTRNG
C1B8 20 DE          BRA   GET

                  * SETUP PIA AND CHK FOR BOARD *
C1BA 4F       INIT  CLRA
C1BB B7 E011        STA   CLOCK+1
```

More

(day of week)
DATE XX:XX:XX
TIME XX:XX:XX
+ + +

When appending this to Flex, you must modify the last three bytes in the last sector of the file. These currently contain $16 CD 00, which is a loader command, and the transfer address for Flex startup. This tells the computer where to start execution of the DOS. These should be changed to $00 00 00 to remove the transfer at this point.

As you will note, the last line of the listing is END $CD00. This will restore the transfer at the new end of the file. The program currently resides at $BDB0, but the object code is location-independent, and will run anywhere without modification.

An indirect jump table is stored at the top of the utility command space; no utility uses this part of memory so it is safe here. Each clock function is available through this table. The list of possibilities is in the listing. I have used this method because changes in

MBC SYSTEMS inc.

(203) 342-2747 TWX 710 4286345

COMPUTERS

HEWLETT-PACKARD
HP-85A.....$2795
HP-83A.....$1990
NORTH STAR
HRZ-2-32K-DD-FACTORY ASSEMBLED.....$2795
HRZ-2-32K-QD-FACTORY ASSEMBLED.....$2995
COMMODORE BUSINESS MACHINES
8032 (80) CHARACTER SCREEN.....$CALL
4032 (40) CHARACTER SCREEN.....$CALL
8050 DUAL DRIVE 1MEG STORAGE.....$CALL
4040 DUAL DRIVE.....$CALL
CALL US FOR COMPLETE LINE
INTERTEC SUPERBRAIN
SUPERBRAIN 64K 2D.....$2890
SUPERBRAIN 64K 2Q.....$3490
ALTOS, APPLE, ATARI ETC. ALSO IN STOCK, CALL FOR PRICES!

PRINTERS

DIABLO 630.....$2395
NEC 5510 SERIAL OR 5530 PARALLEL.....$2595
C.ITOH.....$1775
ANADEX 9500 OR 9501.....$1490
IDS PAPER TIGER 445G.....$820
IDS PAPER TIGER 460G.....$1250
IDS PAPER TIGER 560G 132 COL '5" PAPER.....$1395
WE CARRY CENTRONICS COMPLETE LINE, $CALL
EPSON MX-80FT FRICTION & TRACTOR.....$895
EPSON MX-80.....$595
EPSON MX-70.....$425
OKIDATA MICROLINE 80.....$499
OKIDATA MICROLINE 82.....$690

TERMINALS

TELEVIDEO MODEL 950.....$1075
TELEVIDEO MODEL 920C.....$890
HAZELTINE MODEL 1400.....$599
HAZELTINE MODEL 1420.....$890
INTERTUBE AND EMULATOR.....$775
SOROC IQ 120.....$850
SOROC IQ 135.....$899

SINCE 1977 COMPLETE SALES AND SERVICE. VISA & MC OK!
PRICES ARE SUBJECT TO CHANGE, MOST ITEMS IN STOCK.

✓81

Multi-Business Computer Systems

28 MARLBOROUGH ST. PORTLAND, CT 06480

RACET SORTS — RACET UTILITIES — RACET computes — RACET SORTS — RACET UTILITIES

HARD DISK MULTIPLEXOR WITH 10 MEG HARD DISK
FOR THE TRS-80* Mod II

NOW YOU CAN HAVE THAT LARGE COMMON DATA BASE!!

- Allows up to 4 Mod II's to connect to a single controller — up to 4 hard disk drives per controller. Users may access the same file simultaneously (first-come first-served).
- Uses Cameo controller and standard 10-megabyte cartridge (hard) disk drives along with RACET Hard/Soft Disk System (HSD) software.
- Access times 3 to 8 times faster than floppy. Mixed floppy/hard disk operation supported.
- Compatible with your existing TRSDOS programs! All BASIC statements are identical.
- A single file may be as large as one disk. Alternate mode allows 24-million byte record range. Directory expandable to handle thousands of files.
- Includes special utilities — backup and copies. HPURGE for multiple deletions. HDCS directory catalog system, and Hard Disk Superzap. FORMAT utility includes options for specifying sectors/gran. platters/drive, logical disk size, etc.

HARD DISK DRIVE & CONTROLLER $5995 **RACET HSD Software $400**
Call for multiuser pricing. Dealers call for OEM pricing.

BASIC LINK FACILITY 'BLINK' **$25 Mod I, $50 Mod II**
Link from one BASIC program to another saving all variables! The new program can be smaller or larger than the original program in memory. The chained program may either replace the original program, or can be **merged** by statement number. The statement number where the chained program execution is to begin may be specified! (Mod I Min 32K 1-disk)

INFINITE BASIC (Mod I Tape or Disk) **$49.95**
Extends Level II BASIC with complete MATRIX functions and 50 more string functions. Includes RACET machine language sorts! Sort 1000 elements in 9 seconds!! Select only functions you want to optimize memory usage.

INFINITE BUSINESS (Requires Infinite BASIC) **$29.95**
Complete printer pagination controls — auto headers, footers, page numbers. Packed decimal arithmetic — 127 digit accuracy +, −, *, /. Binary search of sorted and unsorted arrays. Hash codes.

*TRS-80 IS A REGISTERED TRADEMARK OF TANDY CORPORATION

CHECK, VISA, M/C, C.O.D., PURCHASE ORDER
TELEPHONE ORDERS ACCEPTED (714) 637-5016

✓101

RACET COMPUTES
702 Palmdale, Orange, CA 92665

RACET SORTS — RACET UTILITIES — RACET computes — RACET SORTS — RACET UTILITIES

the clock programs will not require each calling program to be changed, since the appropriate new address will be stored in the table. I have modified most of the programs that use a date printout so that they now also print out the time. This is very handy if you do several listings in a day and want to find the most recent one quickly. One nonstandard Flex subroutine, labeled PTEXT, is used. This routine is the same as PSTRNG except that no carriage return and line feed are issued.

Most of the required programming to read and write the clock data is supplied in these listings. There are even routines for conversion from two decimal digits to one binary digit and back.

Conclusion

This clock is an enjoyable and useful addition to my system. I no longer have to enter the date at each start-up, and I can now time operations and control things on a timed basis. The small hardware requirement and the simple software make it easy to adapt to any system.■

Listing 1 continued.

```
C1BE B7   E013          STA    CLOCK+3
C1C1 43                 COMA
C1C2 B7   E010          STA    CLOCK
C1C5 B7   E012          STA    CLOCK+2
C1C8 86   3E            LDA    #$3E
C1CA B7   E011          STA    CLOCK+1
C1CD B7   E013          STA    CLOCK+3
C1D0 F6   E012          LDB    CLOCK+2
C1D3 B1   E013          CMPA   CLOCK+3
C1D6 24   04            BCC    OK
C1D8 1A   01      NFG   ORCC   #1
C1DA 20   02            BRA    RTN
C1DC 1C   FE      OK    ANDCC  #$FE
C1DE 39           RTN   RTS

                  * SET DATA IN CLOCK/CALENDAR *

C1DF 86   80      SET   LDA    #$80
C1E1 B7   E012          STA    CLOCK+2
C1E4 8D   20            BSR    DELAY
C1E6 C6   8C      ON    LDB    #$8C
C1E8 30   8D 00F0       LEAX   BLOCK,PCR
C1EC F7   E012    DLY2  STB    CLOCK+2
C1EF A6   80            LDA    ,X+
C1F1 B7   E010          STA    CLOCK
C1F4 CA   10            ORB    #$10
C1F6 F7   E012          STB    CLOCK+2
C1F9 C4   8F            ANDB   #$8F
C1FB F7   E012          STB    CLOCK+2
C1FE C1   80            CMPB   #$80
C200 27   03            BEQ    ON3
C202 5A                 DECB
C203 20   E7            BRA    DLY2
C205 39           ON3   RTS

C206 34   02      DELAY PSHS   A
C208 86   13            LDA    #$13
>C20A 1021 FFF8   DELAY1 LBRN  DELAY
C20E 4A                 DECA
C20F 27   02            BEQ    OVER
C211 20   F7            BRA    DELAY1
C213 35   02      OVER  PULS   A
C215 39                 RTS
```

More →

■■■■■■■■■■ MORE STRAIGHT TALK ABOUT DISK DRIVES ■■■■■■■■■■

■ DON'T BE CONFUSED BY ALL THE BRAND NAMES YOU SEE IN THE MARKET PLACE, THERE ARE VERY FEW MANUFACTURERS OF THE BASIC DRIVE CHASSIS, ALL THE OTHER NAMES ARE THOSE OF THE ASSEMBLERS OR THE RETAILERS.

■ AS MANUFACTURED, THE DRIVE WILL NOT RUN ON A TRS-80‡, IT MUST BE MODIFIED BY THE ASSEMBLER.

■ THE QUALITY OF THE DRIVE DELIVERED TO YOU IS DEPENDENT ON BOTH THE MANUFACTURER AND THE ASSEMBLER, THE BEST CAN TURN TO JUNK IF THE ASSEMBLY IS IMPROPERLY DONE.

■ THE POWER SUPPLY AND CASE ARE VERY IMPORTANT COMPONENTS OF THE COMPLETE DRIVE, THE CASE MUST ALLOW PROPER COOLING AIR FLOW, AND THE POWER SUPPLY MUST MAINTAIN TWO CONSTANT VOLTAGES.

■ *YOU MUST DEPEND ON* THE COMPANY SELLING YOU THE DRIVE TO SERVICE IT AT REASONABLE COST WHEN IT FAILS YOU, THE MANUFACTURER IS NOT EQUIPPED TO DO THIS!

■ THE BEST MEASURE OF QUALITY IN A DRIVE IS IT'S SPECIFICATIONS, WILL IT HANDLE DOUBLE DENSITY, WHAT IS THE TRACK TO TRACK ACCESS TIME, THE ANSWERS TO THESE TWO QUESTIONS INDICATE THE PRECISION OF IT'S COMPONENTS.

■ WHAT KIND OF DRIVE SHOULD YOU BUY ? LEVEL IV HAS CHOSEN TO DISTRIBUTE EXCLUSIVELY, THE MPI LINE, ALL MODELS OF MPI ARE DOUBLE DENSITY RATED AND REQUIRE ONLY A FIVE MILLI-SECOND TRACK TO TRACK ACCESS TIME.

■ WHAT DO ALL THE MODEL NUMBERS MEAN?
B-51= 40 TRACKS SINGLE HEAD SINGLE SIDE B-52= 40/40 TRACKS DOUBLE HEAD DOUBLE SIDE
B-91= 80 TRACKS SINGLE HEAD SINGLE SIDE B-92= 80/80 TRACKS DOUBLE HEAD DOUBLE SIDE
(DOUBLE HEADS)-READ BOTH SIDES OF DISK (DUALS)-TWO DRIVES IN ONE CASE (RAW)-NO POWER SUPPLY OR CASE

■ WHERE SHOULD YOU BUY YOUR DRIVE, LEVEL IV IS ONE OF THE OLDEST AND LARGEST DISTRIBUTORS OF TRS-80‡ EQUIPMENT, LOOK *AT THE ADS IN YOUR* OLD MAGAZINES, MANY OF THE ADVERTISERS ARE NO LONGER IN BUSINESS, LEVEL IV HAS BEEN A LEADER SINCE THE BEGINNING, WE STAND BEHIND OUR PRODUCTS, AND WE'LL BE HERE WHEN YOU NEED HELP.

■ WHERE DO THE NATIONALLY KNOWN AUTHORS BUY THEIR DRIVES ? LEVEL IV CAN SHOW COPIES OF SALES RECEIPTS FOR DRIVES TO MOST OF THEM, LEVEL IV ALSO PROVIDES SERVICE FOR THEIR DRIVES AND COMPUTER SYSTEMS IN OUR FULLY EQUIPPED TECH CENTER.


■ CALL FOR OUR LOW PRICES ON NEW AND USED DRIVES, AND REMEMBER, WE ALSO TAKE TRADES!

LEVEL IV PRODUCTS INC. 32461 SCHOOLCRAFT, LIVONIA, MI 48150
PHONES: MI (313) 525-6200 OTHERS 800-521-3305 (TOLL FREE)

‡ a trademark of the RADIO SHACK DIV. of TANDY CORP. ↙23

↙See List of Advertisers on page 194

SINGLE BOARD COMPUTER
$49.95

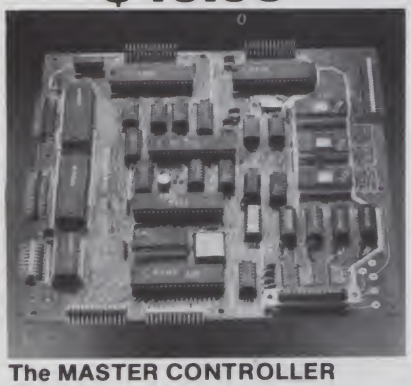

The MASTER CONTROLLER BOARD contains:

Z-80 Microprocessor: will run 8080/8085 and Z-80 programs.
72 - Parallel I/O lines; three 8255s
Keyboard controller: 8279 (also can control a 16 digit seven segment display)
12K - EPROM: three sockets for 2708, 2716, 2732,
2K - RAM: 2114s
8 - Sixteen bit counter timer channels: one 8253 and one AMD 9513
2 - Serial I/O ports; one Z-80 SIO chip. One port has an RS-232 interface and connector.
1 - High speed arithmetic processor: AMD 9511 or AMD 9512
All the I/O chips are memory mapped AND I/O mapped. A bus expansion connector is provided. Can be operated on 5 volts only.

All this on one board less than nine inches on a side

Only three LSI chips (Z-80, 8255, and EPROM) plus support gates and buffers are required for a working controller.

BARE BOARD $49.95
With documentation.

MINIMUM KIT $99.95 Includes bare board with documentation, one each Z-80, 8255, 2708, two 2114s, and support gates and buffers, all socketed.

MONITOR $39.95 This program allows a TTY or CRT to control the MASTER CONTROLLER. This program requires the minimum kit and monitor parts kit. A programmed 2708 is supplied with the MONITOR.

MONITOR PARTS $54.95
Includes 8253, Z-80 SIO, 1488, 1489, and connector.

POWER SUPPLY $39.95 +5V 1A, -5V ¼A, +12V ¼A, -12V ¼A

POWER SUPPLY $44.95 +5V 2A, otherwise same as above.

Please include $2 postage and handling.

OEM and dealer inquiries invited.
VISA and MASTER CARD accepted.

R.W. ELECTRONICS ↗390
3165 North Clybourn
Chicago, IL 60618
(312) 248-2480

Listing 1 continued.

```
                        * STRINGS *

C216 45 4E 54 45    INTRO   FCC     /ENTER DATE & TIME/
C21A 52 20 44 41
C21E 54 45 20 26
C222 20 54 49 4D
C226 45
C227 04                     FCB     4
C228 4E 4F 20 43    NOBD    FCC     /NO CLOCK BOARD INSTALLED/
C22C 4C 4F 43 4B
C230 20 42 4F 41
C234 52 44 20 49
C238 4E 53 54 41
C23C 4C 4C 45 44
C240 04                     FCB     4
C241 59 45 41 52    YEAR    FCC     /YEAR? 19/
C245 3F 20 31 39
C249 04                     FCB     4
C24A 4D 4F 4E 54    MONTH   FCC     /MONTH?  /
C24E 48 3F 20 20
C252 04                     FCB     4
C253 44 41 59 3F    DAY     FCC     /DAY?    /
C257 20 20 20 20
C25B 04                     FCB     4
C25C 44 41 59 53    DOW     FCC     /DAYS FROM SUNDAY?/
C260 20 46 52 4F
C264 4D 20 53 55
C268 4E 44 41 59
C26C 3F
C26D 04                     FCB     4
C26E 48 4F 55 52    HOUR    FCC     /HOUR?   /
C272 3F 20 20 20
C276 04                     FCB     4
C277 4D 49 4E 55    MINUTE  FCC     /MINUTE? /
C27B 54 45 3F 20
C27F 04                     FCB     4
C280 4C 45 41 50    LPYR    FCC     /LEAP YEAR?/
C284 20 59 45 41
C288 52 3F
C28A 04                     FCB     4
C28B 50 52 45 53    START   FCC     /PRESS ANY KEY TO START CLOCK)))))))/
C28F 53 20 41 4E
C293 59 20 4B 45
C297 59 20 54 4F
C29B 20 53 54 41
C29F 52 54 20 43
C2A3 4C 4F 43 4B
C2A7 3E 3E 3E 3E
C2AB 3E 3E
C2AD 04                     FCB     4
C2AE 45 52 52 4F    ERRORS  FCC     /ERROR  RE-ENTER!!!/
C2B2 52 20 20 52
C2B6 45 2D 45 4E
C2BA 54 45 52 21
C2BE 21 21
C2C0 04                     FCB     4
C2C1 57 41 4E 54    ERROR1  FCC     /WANT TO REDO FOR MISTAKES?/
C2C5 20 54 4F 20
C2C9 52 45 44 4F
C2CD 20 46 4F 52
C2D1 20 4D 49 53
C2D5 54 41 4B 45
C2D9 53 3F
C2DB 04                     FCB     4

                C2DC BLOCK  EQU     *

C2DC                        ORG     BLOCK

C2DC                YR10    RMB     1
C2DD                YR1     RMB     1
C2DE                MO10    RMB     1
C2DF                MO1     RMB     1
C2E0                DAY10   RMB     1
C2E1                DAY1    RMB     1
C2E2                DOWK    RMB     1          DAY OF WEEK (NUMBER FROM SUNDAY)
C2E3                H10     RMB     1
C2E4                H1      RMB     1
C2E5                MI10    RMB     1
C2E6                MI1     RMB     1

C2E7 09 09 01 09    MAX     FCB     9,9,1,9,3,9,6,2,9,5,9
C2EB 03 09 06 02
C2EF 09 05 09

                            END     CALSET


SYMBOL TABLE:

BLOCK   C2DC    CALSET C100    CLOCK   E010    DAY     C253    DAY1    C2E1
DAY10   C2E0    DELAY  C206    DELAY1 C20A     DLY2    C1EC    DOW     C25C
DOWK    C2E2    ERROR1 C2C1    ERRORS C2AE     G2ERR   C1B1    GET     C198
GET1    C192    GET2   C196    GETCHR CD15     H1      C2E4    H10     C2E3
HOUR    C26E    INIT   C1BA    INTRO  C216     LPYR    C280    MAX     C2E7
MI1     C2E6    MI10   C2E5    MINUTE C277     MO1     C2DF    MO10    C2DE
MONTH   C24A    NFG    C1D8    NOBD   C228     OK      C1DC    OK2     C112
ON      C1E6    ON1    C169    ON3    C205     OVER    C213    PSTRNG CD1E
RTN     C1DE    RTN1   C1B0    SET    C1DF     START   C28B    TIME1  C103
VERSID  0001    WARMS  CD03    YEAR   C241     YR1     C2DD    YR10   C2DC
```

Listing 2

```
                ********************************************
                ********************************************
                ** NEW VERSION OF FLEX PATCH. ADDS NEW ROU-  **
                ** TINES TO ALLOW ANY PROGRAM TO PRINT TIME  **
                ** OR READ ANY CLOCK DATA. SITS AT TOP OF    **
                ** USER AND PROTECTS ITSELF.                 **
                ********************************************
                ********************************************
               * FLEX EQUATES *

          CC10  SYSYR   EQU    $CC10
          CC0F  SYSDAY  EQU    $CC0F
          CC0E  SYSMTH  EQU    $CC0E
          CD18  PUTCHR  EQU    $CD18
          CD1E  PSTRNG  EQU    $CD1E
          CD24  PCRLF   EQU    $CD24
          CE84  PTEXT   EQU    $CE84
          CC2B  MEMEND  EQU    $CC2B

               * CLOCK BOARD ADDRESS FOR PORT #4 *

          E010  CLOCK   EQU    $E010
                * CURRENT TOP OF MEMORY *

           BFFF  TOP     EQU    $BFFF     *** ADJUST FOR YOUR SYSTEM ***

                * INDIRECT JUMP TABLE FOR CLOCK FUNCTIONS *
                * PUT TABLE AT TOP OF UTILITY SPACE *

C6E0                     ORG    $C6E0
C6E0 BEC3          CLOCK1 FDB    DATEH     PRINT DATE WITH LABEL
C6E2 BECA          CLOCK2 FDB    DATEN     PRINT DATE AS MM/DD/YY
C6E4 BF02          CLOCK3 FDB    DATEA     PRINT DATE AS DD-MMM-YY
C6E6 BFB0          CLOCK4 FDB    DATA      BLOCK OF 13 BYTES AS CLOCK DATA
C6E8 BF66          CLOCK5 FDB    GETTIM    GET NEW TIME TO BUFFER
C6EA BF3C          CLOCK6 FDB    TIMEH     PRINT TIME WITH LABEL
C6EC BF43          CLOCK7 FDB    TIMEN     PRINT PLAIN TIME AS XX:XX:XX
C6EE BF45          CLOCK8 FDB    LSTTIM    PRINT LAST CALLED TIME PLAIN
C6F0 BE12          CLOCK9 FDB    DOW       PRINTS DAY OF WEEK
C6F2 BE6E          CLOCKA FDB    GETDAT    GET DATA FROM STT TO STP

                * PATCH TO JUMP TO NEW STARTUP *


CA50                     ORG    $CA50
CA50 7E   BDB0     PATCH JMP     START1
CA53 00 00 00 00   FILL  FCB     0,0,0,0,0,0
CA57 00 00
CA59 8D   5B       RETURN BSR    $CAB6
BDB0                     ORG    $BDB0
BDB0 CC   BDAF     START1 LDD    #START1-1
BDB3 FD   CC2B           STD    MEMEND
BDB6 4F            START2 CLRA             SETUP PIA
BDB7 B7   E011           STA    CLOCK+1
BDBA B7   E013           STA    CLOCK+3
BDBD B7   E010           STA    CLOCK
BDC0 43                  COMA
BDC1 B7   E012           STA    CLOCK+2
BDC4 86   3E             LDA    #$3E
BDC6 B7   E011           STA    CLOCK+1
BDC9 B7   E013           STA    CLOCK+3
BDCC F6   E012           LDB    CLOCK+2
BDCF B1   E013           CMPA   CLOCK+3
BDD2 27   0C             BEQ    BRDOK     BOARD OK, THEN GET DATA
BDD4 8E   CAD0           LDX    #$CAD0    ELSE USE STANDARD START
BDD7 BD   CE82           JSR    $CE82
BDDA BD   CE2C           JSR    $CE2C
BDDD 7E   CA59           JMP    $CA59
BDE0 86   A0       BRDOK LDA    #$A0      SET UP TO GET ALL DATA
BDE2 A7   8D 01E4        STA    STT,PCR
BDE6 86   AC             LDA    #$AC
BDE8 A7   8D 01DF        STA    STP,PCR
BDEC AD   9F C6F2        JSR    [CLOCKA]  GETDATA
BDF0 17   00AD           LBSR   DT2FLX    MOVE DATE TO FLEX
BDF3 30   8D 019C        LEAX   INTRO,PCR
BDF7 BD   CD1E           JSR    PSTRNG
BDFA BD   CD24           JSR    PCRLF
BDFD AD   9F C6F0        JSR    [CLOCK9]  PRINT CURRENT DAY OF WEEK
BE01 BD   CD24           JSR    PCRLF
BE04 AD   9F C6E0        JSR    [CLOCK1]  PRINT DATE
BE08 BD   CD24           JSR    PCRLF
BE0B AD   9F C6EA        JSR    [CLOCK6]  PRINT TIME
BE0F 7E   CA71           JMP    $CA71
BE12 34   16       DOW   PSHS   A,B,X     PRINT PLAIN DAY OF WEEK
BE14 30   8D 0198        LEAX   DATA,PCR
BE18 E6   06             LDB    6,X
BE1A 86   0A             LDA    #10
BE1C 3D                  MUL
BE1D 30   8D 0007        LEAX   WKDYS,PCR
BE21 3A                  ABX
BE22 BD   CE84           JSR    PTEXT
BE25 35   16             PULS   A,B,X
BE27 39                  RTS
BE28 53 55 4E 44   WKDYS FCC    /SUNDAY   /
BE2C 41 59 20 20
BE30 20
BE31 04                  FCB    4
BE32 4D 4F 4E 44         FCC    /MONDAY   /
BE36 41 59 20 20
BE3A 20
```

More →

MICROSETTE CASSETTES



C-10 C-20
COMPUTER CASSETTES



C-60 C-90
AUDIO CASSETTES

Microsette, the undisputed industry leader in short cassettes for microcomputer applications also offers equally high grade audio cassettes at budget prices. Credit card buyers may phone (415) 968-1604.

LOOK AT OUR PRICES

Length	10 Pack	50 Pack
C-10	$ 7.50	$32.50
C-20	$ 9.00	$39.00
C-60	$13.50	$57.50
C-90	$17.50	$77.50

UPS shipment in Cont. USA incl.
We can not ship to P.O. Boxes

Length	Qty.	Price	Total
SUBTOTAL			
Calif. Cust. add Sales Tax			
TOTAL			

Check or money order enclosed ☐
Charge to: Visa ☐ Master Card ☐
Account No. _____
Expiration Date _____

SIGNATURE _____ KM

MICROSETTE CO.
475 Ellis Street
Mt. View, CA 94043

See List of Advertisers on page 194

Sprint 68 Microcomputer



CONTROL COMPUTER DEVELOPMENT SYSTEM
6800 MPU, serial I/O, 48K RAM, dual 8" drives, WIZRD multitasking DOS, editor, assembler, 12K BASIC, all for $3995.

OPTIONS
C, PL/W, PASCAL, FORTRAN, EROM programmer, analog I/O, parallel I/O, 488 GPIB interface, CMOS RAM/battery, power fail detect/power on reset

WINTEK

Wintek Corp. ✓163
1801 South Street
Lafayette, IN 47904
317-742-8428

System Software Design, Inc.
presents
Ultimate Data System
for

- The Apple II* computer with
  - Applesoft* in ROM or Language System*
  - 48K of RAM
  - 2 Disk Drives
  - Optional Printer
- This easy-to-use data manager will make
  - General Ledger
  - Mailing Lists
  - Inventory
  - Any other data related tasks quick and efficient to manage
- Seek times under 1/2 second for data lists up to 7500 records
- Many more fast and powerful features
- Single copy $100.00
- Dealer terms available

Write to
System Software Design, Inc.
124 Eleventh St.
Providence, RI 02906

*T.M. of Apple Computer Inc. - ✓367

No. 3 UNBELIEVABLE OPPORTUNITY!

If You've Written an Extraordinary Program--We'd Like to Publish It!

Programs needed for MANAGEMENT applications:

PERT & CPM SCHEDULING
PREDICTIVE MODELING
DECISION-MAKING SIMULATIONS
PRODUCTION SCHEDULING
EXPENSE ANALYSES

Royalty checks may be in YOUR future. Write for our free Programmer's Kit today.

INSTANT SOFTWARE, INC. ✓75
Submissions Dept.
Peterborough, NH 03458

Listing 2 continued.

```
BE3B 04                        FCB     4
BE3C 54 55 45 53               FCC     /TUESDAY  /
BE40 44 41 59 20
BE44 20
BE45 04                        FCB     4
BE46 57 45 44 4E               FCC     /WEDNESDAY/
BE4A 45 53 44 41
BE4E 59
BE4F 04                        FCB     4
BE50 54 48 55 52               FCC     /THURSDAY /
BE54 53 44 41 59
BE58 20
BE59 04                        FCB     4
BE5A 46 52 49 44               FCC     /FRIDAY   /
BE5E 41 59 20 20
BE62 20
BE63 04                        FCB     4
BE64 53 41 54 55               FCC     /SATURDAY /
BE68 52 44 41 59
BE6C 20
BE6D 04                        FCB     4
BE6E 34   36          GETDAT   PSHS    A,B,X,Y   GET DATA FROM STT TO STP
BE70 17   0102                 LBSR    HOLDIN
BE73 30   8D 0139              LEAX    DATA,PCR
BE77 31   8D 0142              LEAY    LIMIT,PCR
BE7B A6   8D 014B              LDA     STT,PCR
BE7F B7   E012        DATA1    STA     CLOCK+2
)BE82 1021 FFFC                LBRN    *
)BE86 1021 FFFC                LBRN    *
BE8A F6   E010                 LDB     CLOCK
BE8D E4   A0                   ANDB    0,Y+
BE8F E7   80                   STB     0,X+
BE91 A1   8D 0136              CMPA    STP,PCR
BE95 27   03                   BEQ     DATA2
BE97 4C                        INCA
BE98 20   E5                   BRA     DATA1
BE9A 17   00ED        DATA2    LBSR    HLDOUT
BE9D 35   36                   PULS    A,B,X,Y
BE9F 39                        RTS
BEA0 30   8D 0118    DT2FLX    LEAX    DATA+12,PCR MOVE DATA FROM BUFFER TO FLEX
BEA4 A6   84                   LDA     0,X
BEA6 C6   0A                   LDB     #10
BEA8 3D                        MUL
BEA9 EB   82                   ADDB    0,-X
BEAB F7   CC10                 STB     SYSYR
BEAE A6   82                   LDA     0,-X
BEB0 C6   0A                   LDB     #10
BEB2 3D                        MUL
BEB3 EB   82                   ADDB    0,-X
BEB5 F7   CC0E                 STB     SYSMTH
BEB8 A6   82                   LDA     0,-X
BEBA C6   0A                   LDB     #10
BEBC 3D                        MUL
BEBD EB   82                   ADDB    0,-X
BEBF F7   CC0F                 STB     SYSDAY
BEC2 39                        RTS
BEC3 30   8D 00DB    DATEH     LEAX    DATES,PCR PRINT DATE WITH LABEL
BEC7 BD   CE84                 JSR     PTEXT
BECA 30   8D 00E2    DATEN     LEAX    DATA,PCR  PRINT PLAIN DATE
BECE A6   0A                   LDA     10,X
BED0 8B   30                   ADDA    #$30
BED2 BD   CD18                 JSR     PUTCHR
BED5 A6   09                   LDA     9,X
BED7 8B   30                   ADDA    #$30
BED9 BD   CD18                 JSR     PUTCHR
BEDC 86   2F                   LDA     #'/
BEDE BD   CD18                 JSR     PUTCHR
BEE1 A6   08                   LDA     8,X
BEE3 8B   30                   ADDA    #$30
BEE5 BD   CD18                 JSR     PUTCHR
BEE8 A6   07                   LDA     7,X
BEEA 8B   30                   ADDA    #$30
BEEC BD   CD18                 JSR     PUTCHR
BEEF 86   2F                   LDA     #'/
BEF1 BD   CD18                 JSR     PUTCHR
BEF4 A6   0C                   LDA     12,X
BEF6 8B   30                   ADDA    #$30
BEF8 BD   CD18                 JSR     PUTCHR
BEFB A6   0B                   LDA     11,X
BEFD 8B   30                   ADDA    #$30
BEFF 7E   CD18                 JMP     PUTCHR
BF02 10AE 8D 00A9    DATEA     LDY     DATA,PCR  PRINT ALPHA MONTH IN DATE
BF07 A6   28                   LDA     8,Y
BF09 8B   30                   ADDA    #$30
BF0B BD   CD18                 JSR     PUTCHR
BF0E A6   27                   LDA     7,Y
BF10 8B   30                   ADDA    #$30
BF12 BD   CD18                 JSR     PUTCHR
BF15 86   2D                   LDA     #'-
BF17 BD   CD18                 JSR     PUTCHR
BF1A AE   8D 00AE              LDX     MONTHS,PCR
BF1E F6   CC0E                 LDB     SYSMTH
BF21 5A                        DECB
BF22 86   04                   LDA     #4
BF24 3D                        MUL
BF25 3A                        ABX
BF26 BD   CE84                 JSR     PTEXT
BF29 86   2D                   LDA     #'-
BF2B BD   CD18                 JSR     PUTCHR
BF2E A6   2C                   LDA     12,Y
```

More →

Listing 2 continued.


```
BF30 8B   30              ADDA   #$30
BF32 BD   CD18            JSR    PUTCHR
BF35 A6   2B              LDA    11,Y
BF37 8B   30              ADDA   #$30
BF39 7E   CD18            JMP    PUTCHR
BF3C 30   8D 0069 TIMEH   LEAX   TIMES,PCR PRINT TIME WITH LABEL
BF40 BD   CE84            JSR    PTEXT
BF43 8D   21      TIMEN   BSR    GETTIM
BF45 30   8D 006C LSTTIM  LEAX   DATA+5,PCR PRINT TIME IN BUFFER
BF49 C6   03              LDB    #3
BF4B A6   84      TIME1   LDA    0,X
BF4D 8B   30              ADDA   #$30
BF4F BD   CD18            JSR    PUTCHR
BF52 A6   82              LDA    0,-X
BF54 8B   30              ADDA   #$30
BF56 BD   CD18            JSR    PUTCHR
BF59 30   1F              LEAX   -1,X
BF5B 5A                   DECB
BF5C 27   07              BEQ    TIME2
BF5E 86   3A              LDA    #':
BF60 BD   CD18            JSR    PUTCHR
BF63 8D   E6              BSR    TIME1
BF65 39           TIME2   RTS
BF66 86   A0      GETTIM  LDA    #$A0
BF68 A7   8D 005E         STA    STT,PCR
BF6C 86   A5              LDA    #$A5
BF6E A7   8D 0059         STA    STP,PCR
BF72 16   FEF9            LBRA   GETDAT
BF75 34   02      HOLDIN  PSHS   A          HOLD FOR READ
BF77 86   80              LDA    #$80
BF79 B7   E012            STA    CLOCK+2
BF7C 86   23              LDA    #$23
BF7E 1021 FFFC    DLY1    LBRN   DLY1
BF82 4A                   DECA
BF83 27   02              BEQ    DLY2
BF85 20   F7              BRA    DLY1
BF87 35   02      DLY2    PULS   A
BF89 39                   RTS
BF8A 34   02      HLDOUT  PSHS   A
BF8C 4F                   CLRA
BF8D B7   E012            STA    CLOCK+2
BF90 35   02              PULS   A
BF92 39                   RTS
BF93 00 00 00     INTRO   FCB    0,0,0
BF96 53 49 47 4E          FCC    /SIGN ON :/
BF9A 20 4F 4E 20
BF9E 3A
BF9F 0D 0A 04             FCB    13,10,4
BFA2 44 41 54 45  DATES   FCC    /DATE  /
BFA6 20 20
BFA8 04                   FCB    4
BFA9 54 49 4D 45  TIMES   FCC    /TIME  /
BFAD 20 20
BFAF 04                   FCB    4
BFB0              DATA    RMB    13
BFBD 0F 0F 0F 07  LIMIT   FCB    $F,$F,$F,7,$F,3,7,$F,3,$F,3,$F,$F
BFC1 0F 03 07 0F
BFC5 03 0F 03 0F
BFC9 0F
BFCA              STT     RMB    1
BFCB              STP     RMB    1
BFCC 4A 41 4E     MONTHS  FCC    /JAN/
BFCF 04                   FCB    4
BFD0 46 45 42             FCC    /FEB/
BFD3 04                   FCB    4
BFD4 4D 41 52             FCC    /MAR/
BFD7 04                   FCB    4
BFD8 41 50 52             FCC    /APR/
BFDB 04                   FCB    4
BFDC 4D 41 59             FCC    /MAY/
BFDF 04                   FCB    4
BFE0 4A 55 4E             FCC    /JUN/
BFE3 04                   FCB    4
BFE4 4A 55 4C             FCC    /JUL/
BFE7 04                   FCB    4
BFE8 41 55 47             FCC    /AUG/
BFEB 04                   FCB    4
BFEC 53 45 50             FCC    /SEP/
BFEF 04                   FCB    4
BFF0 4F 43 54             FCC    /OCT/
BFF3 04                   FCB    4
BFF4 4E 4F 56             FCC    /NOV/
BFF7 04                   FCB    4
BFF8 44 45 43             FCC    /DEC/
BFFB 04                   FCB    4
                          END    $CD00
```

SYMBOL TABLE:


```
BRDOK  BDE0   CLOCK  E010   CLOCK1 C6E0   CLOCK2 C6E2   CLOCK3 C6E4
CLOCK4 C6E6   CLOCK5 C6E8   CLOCK6 C6EA   CLOCK7 C6EC   CLOCK8 C6EE
CLOCK9 C6F0   CLOCKA C6F2   DATA   BFB0   DATA1  BE7F   DATA2  BE9A
DATEA  BF02   DATEH  BEC3   DATEN  BECA   DATES  BFA2   DLY1   BF7E
DLY2   BF87   DOW    BE12   DT2FLX BEA0   FILL   CA53   GETDAT BE6E
GETTIM BF66   HLDOUT BF8A   HOLDIN BF75   INTRO  BF93   LIMIT  BFBD
LSTTIM BF45   MEMEND CC2B   MONTHS BFCC   PATCH  CA50   PCRLF  CD24
PSTRNG CD1E   PTEXT  CE84   PUTCHR CD18   RETURN CA59   START1 BDB0
START2 BDB6   STP    BFCB   STT    BFCA   SYSDAY CC0F   SYSMTH CC0E
SYSYR  CC10   TIME1  BF4B   TIME2  BF65   TIMEH  BF3C   TIMEN  BF43
TIMES  BFA9   TOP    BFFF   WKDYS  BE28
```


If you're looking for the best prices


on TRS-80®



Model II 64K $ 3298



Model III 16K $839



Color Computer 4K $ 319.00

Other TRS-80 Model II, or Model III computers and systems, Color Computers, and Pocket Computers are in stock at similar savings.

Check out our low, low prices on all Radio Shack merchandise

WRITE OR CALL FOR OUR COMPLETE PRICE LIST.

full Radio Shack warranty

★ Payment: Money Order, Cashier's Check, Certified Check. Personal Checks require 3 weeks to clear. VISA, MASTERCHARGE — Add 3%

★ Prices subject to change at any time

CALL (602) 458-2477

or write today

RAND'S ✓102


2185 E. FRY BLVD.

SIERRA VISTA, AZ 85635

® TRS-80 is a trademark of Tandy Corporation.

✓See List of Advertisers on page 194


A-D & D-A CONVERTER



JBE A-D & D-A Converter can be used with any system having parallel ports • Interfaces with JBE Parallel I/O Card • D-A conversion time — 5 μs • A-D conversion time — 20 μs • Uses JBE 5V power supply • Parallel inputs & outputs include 8 data bits, strobe lines & latches • Analog inputs & outputs are medium impedance 0 to 5 volt range.

79-287 ASSM. **$79.95**
Bare Board **$39.95** Kit **$59.95**

6502 MICROCOMPUTER



This control computer has: • 1024 bytes RAM (two 2114s) • 2048 bytes EPROM (2716) • Uses one 6522 VIA (comp. doc. incl.) • Interfaces with JBE Solid State Switches & A-D & D-A Converter • Uses JBE 5V power supply • 2716 EPROM available separately (2716 can be programmed with an Apple II & JBE EPROM Programmer & Parallel Interface) • 50 pin connector included in kit & assm.

80-153 ASSM. **$110.95**
Bare Board **$49.95** Kit **$ 89.95**

SOLID STATE SWITCH



Your computer can control power to your printer, lights, stereo & any 120VAC appliances up to 720 watts (6 amps at 120VAC). Input 3 to 15VDC • 2-14MA TTL compatible • Isolation — 1500V • Non zero crossing • Comes in 1 or 4 channel version • Includes doc. for interfacing with Dimmer Control.

79-282-1 ASSM. **$13.95**
Bare Board **$6.95** Kit **$10.95**
79-282-4 ASSM. **$49.95**
Bare Board **$24.95** Kit **$39.95**


APPLE II DISPLAY BOARD



• Has run-stop, single step switch • Has 16 address LEDs, 8 data LEDs & 1 RDY LED • All lines are buffered.

80-144 ASSM. **$49.95**
Bare Board **$25.95** Kit **$42.95**


Z80 MICROCOMPUTER



JBE is announcing a single board dedicated computer designed for control functions. It features: • A Z80 Microprocessor software compatible with the Z80, 8080 & 8085 Microprocessors • Uses a Z80 PIO chip for I/O which has 2 independent 8 bit bidirectional peripheral interface ports with handshake & data transfer control • Uses one 2716 EPROM (2K) & two 2114 RAM memories (1K) • Single 5V power supply at 300MA req. • Clock frequency is 2MHz, RC controlled • Board comes with complete doc. • 50 pin connector is included • 2716 EPROM available separately.

80-280 ASSM. **$129.95**
Bare Board **$49.95** Kit **$119.95**

PRINTER INTERFACE



JBE Parallel Printer Interface interfaces your Apple II® to Centronics® compatible printers. This 3" x 4" board features: on board ROM compatible with Integer Basic, Applesoft® and Pascal® • Has one 8 bit parallel latched output port with selectable positive or negative strobe and one bit input selectable for Ready or Ready • Cable and Connectors available separately.

80-297 ASSM. **$79.95**
Kit **$69.95**
4 ft. Std. Dip Jumpers 16 pin **$ 4.25**
Champ Connector **$ 9.95**

POWER SUPPLIES

• Use wall transformers for safety • Protected against short circuit and thermal breakdown.

5 VOLT POWER SUPPLY

Rated at 5V 500MA • Operates JBE A-D & D-A Converter, Z80 & 6502 Microcomputers, 8085 & 8088 Microcomputers.

80-160 ASSM. **$20.95**
Bare Board **$8.95** Kit **$16.95**

± 12 VOLT POWER SUPPLY


Rated at ± 12V 120MA • Can be used as a single 24V power supply • Ideally suited to OP-AMP experiments.

80-161 ASSM. **$22.95**
Bare Board **$8.95** Kit **$18.95**

ICS

6502	**$9.95**
6522	**$9.95**
Z80	**$9.95**
Z80 PIO	**$9.95**
2716 5V	**$14.95**

6522 APPLE II INTERFACE



• Interfaces printers, synthesizers, keyboards, JBE A-D & D-A Converter & Solid State Switches • Has handshaking logic, two 6522 VIAs & a 74LS74 for timing. Inputs & outputs are TTL compatible.

79-295 ASSM. **$69.95**
Bare Board **$39.95** Kit **$59.95**

2716 EPROM PROGRAMMER



JBE 2716 EPROM Programmer was designed to program 5V 2716 EPROMS • It can also read 2716s. It interfaces to the Apple II using JBE Parallel I/O Card & four ribbon cable connectors • An LED indicates when power is being applied to the EPROM • A textool zero insertion force socket is used for the EPROM • Comes with complete doc. for writing and reading in the Apple II or Apple II + • Cables available separately.

80-244 ASSM. **$49.95**
Bare Board **$24.95** Kit **$39.95**

BARE BOARDS

APPLE II EXTENDER BOARD

3½" x 2½". Price includes 50 pin Apple Connector.

80-143 **$12.95**

8085 3 CHIP SYSTEM

State-of-the-art system using an 8085, 8156 & either an 8355 or 8755 • Instruction set 100% upward compatible with 8080A.

Bare Board **$24.95**

8088 5 CHIP SYSTEM

An 8086 family microcomputer system using an 8088 CPU, 8284, 8155, 8755A & an 8185.

Bare Board **$29.95**

CRT CONTROLLER

This intelligent CRT Controller is based on an 8085A Microprocessor & an 8275 Integrated CRT Controller. It features: • 25 lines, 80 characters/line • 5x7 dot matrix • Upper case only • Two 2716s • Serial Interface RS232 & TTL • Baud rates of 110, 150, 300, 600, 1200, 2400, 4800 & 9600 • Keyboard scanning system • Req's. unencoded keyboard • Uses +5V & ± 12V power supplies.

Bare Board **$39.95**

50 pin connector **$5.95**
STD. Dip Jumpers
16 Pin, 2 ft. **$4.25**

JOHN BELL ENGINEERING

99

MC

ALL PRODUCTS ARE AVAILABLE FROM **JOHN BELL ENGINEERING** • P.O. BOX 338
REDWOOD CITY, CA 94064 • ADD 6% SALES TAX IN CALIFORNIA • ADD 5% SHIPPING & HANDLING

VISA

(415) 367-1137

Here's a timesaving approach to handling subscription lists.

6800 Disk-Based Mailing List

By Dr. Gordon Wolfe

As a regional officer in a nonprofit educational corporation, I frequently send out mailings to officers of local branches within the region. Also, as part of my responsibilities, I'm co-editor of a small monthly magazine. Therefore, I know how frustrating it can be to keep track of addresses, changes of address and subscription dates on paper.

A microcomputer is one way to keep yourself from going crazy. Unfortunately, most existing mailing list programs have one or two drawbacks: Either all entries are resident in memory at the same time, thus limiting the number of entries, or the program is cassette-based, thus increasing the execution time.

The solution is to store your information on disk. Execution is faster, and the size of the list is limited only by the capacity of the disk.

The program MAILST is written in Smoke Signal Broadcasting's disk file BASIC for the SWTP 6800. It requires 3K of memory in addition to the 11K BASIC interpreter, so at least 16K of memory is needed.

Hardware requirements are simple. Along with the CPU and disk you need a control terminal and a printer on port 7.

The program is self-explanatory, easy to use and tries to cover all contingencies. Also, much information on the disk may be useful in other programs.

Option List

You are first asked for the current date to be used in evaluating expired names. Then the program prints a user menu of services (Sample run 1):

1. ENTER NEW FILE—you may create a new file or mailing list.
2. ADD TO EXISTING FILE—you may add new entries to the list file.
3. PRINT MAILING TAPE—the printer puts out only names and addresses on the list file. Peel-and-stick mailing labels may be placed in the printer, since the list uses four lines to a name (Dennison's File Folder Labels, type 43-751, work perfectly in a PR-40 printer). After printing the list, the program outputs labels for all entries whose expiration date is previous to the present date, so that reminder notices may be sent for renewal. (See Sample run 2.)
4. DELETE EXPIRED NAMES—deletes any entry from the file whose expiration date is less than the current date. This is the only way to delete an entry, although it may be used in conjunction with the following option (no. 5).
5. CHANGE INFO ON FILE—prints each entry of the file on the terminal and asks if it is correct. If the answer is "no," you may change any or all of the entry by reentering the whole entry. To delete an entry entirely, simply enter zeros for the expiration date and then run option 4. (See Sample run 4.)
6. PRINT LIST—prints the complete list, with expiration dates and identifiers on the printer, with a

Dr. Gordon Wolfe, University of Mississippi, Oxford, MS 38677.

```
TODAY'S DATE (MO,YR)? 6,80

OPTION LIST

1   ENTER NEW FILE
2   ADD TO  EXISTING FILE
3   PRINT MAILING TAPE
4   DELETE EXPIRED NAMES
5   CHANGE  INFO ON FILE
6   PRINT LIST
7   LIST FILES
8   SEARCH
9   TRANSFER INFO TO OTHER FILE
0   EXIT

OPTION 7


DOS68  . 31     DFM68O. 341
DFM68O. 342     DFM68O. 343
MAILST. BAS     DATRED. BAS
KINGDO. LST     OFFICE. LST
MAILST. KIL     REGNUM. LST
APHAR  . LST    SCIENC. LST
KILOBA. LST     BOARD  . LST
FRIEND. LST     DATBAS. BAS
CORPOR. LST     HAMMER. LST
```

Sample run 1.

```
OPTION LIST

1   ENTER NEW FILE
2   ADD TO  EXISTING FILE
3   PRINT MAILING TAPE
4   DELETE EXPIRED NAMES
5   CHANGE  INFO ON FILE
6   PRINT LIST
7   LIST FILES
8   SEARCH
9   TRANSFER INFO TO OTHER FILE
0   EXIT

OPTION 3


FIILE NAME (NO EXT)? KILOBA
HOW MANY COPIES? 1
DR. GORDON W.  WOLFE
PHYSICS DEPT.  U.M.
UNIVERSITY  MS  38677

JAMES E.  CARTER
1600 PENNSYLVANIA AVE
WASHINGTON DC   20044

WAYNE GREEN
PINE ST.
PETERBOROUGH  NH




EXPIRED SUBSCRIPTIONS


JOE KLOTZ
1234 ANYSTREET
SINGAPORE  SD   99999
EXPIRED 7209
```

Sample run 2.

"NIBBLE IS TERRIFIC" (For Your Apple)

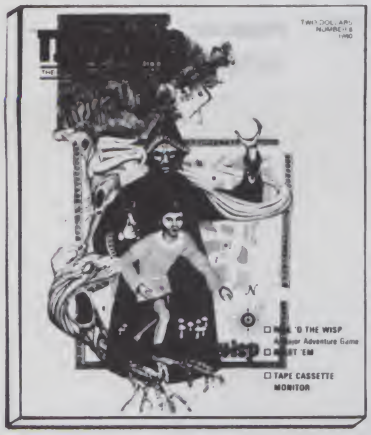

NIBBLE IS:
The Reference for Apple computing!
NIBBLE IS:
One of the Fastest Growing new Magazines in the Personal Computing Field.
NIBBLE IS:
Providing Comprehensive, Useful and Instructive Programs for the Home, Small Business, and Entertainment.
NIBBLE IS:
A Reference to Graphics, Games, Systems Programming Tips, Product News and Reviews, Hardware Construction Projects, and a host of other features.
NIBBLE IS:
A magazine suitable for both the Beginner and the Advanced Programmer.

NIBBLE is focused completely on the Apple Computer systems.

And each issue features significant new Programs of Commercial Quality.

Buy NIBBLE through your local Apple Dealer or subscribe now with the coupon below.

Try a NIBBLE!

NIBBLE
Box 325, Lincoln, MA 01773 ✓286
(617) 259-9710

I'll try nibble!
Enclosed is my $17.50 (for 8 issues)
☐ **check** ☐ **money order**

Your subscription will start with the first issue after receipt of your payment. (Outside the U.S. see below)*

Name _____
Address _____
City _____
State _____
Zip _____

*First Class or Air Mail is required for all APO, FPO and all foreign addresses with the following additional amounts.
—Airmail Postage Rates, 12-140Z x 8
—Europe—$32
—Mexico & Central America—$21
—South America—$32
—Middle East—$35
—Africa: North—$32, Central—$43, South—$43
—Far East, Australia—$43
—Canada—$18
—APO—FPO—$7.50

© 1980 by MICRO SPARC, INC., Lincoln, MA 01773
All rights reserved.
*Apple II is a registered trademark of Apple Computer Company

Program listing.

```
*
0010 STRING= 39
0015 DIM T1(2)
0020 HOME
0025 INPUT "TODAY'S DATE (MO,YR)",M,Y
0026 LET T=100*Y+M
0030 REM
0031 REM MAILING LIST PROGRAM
0032 REM DATA ON DISK
0033 REM EXTENSION OF FILE IS
0034 REM ALWAYS .LST
0035 REM
0036 DATA .LST,TEMP.LST
0037 READ E$,D$
0039 PRINT CHR$(16);CHR$(11);CHR$(11):HO
ME
0040 PRINT "OPTION LIST":PRINT
0041 PRINT 1;TAB(5);"ENTER NEW FILE"
0042 PRINT 2;TAB(5);"ADD TO EXISTING FIL
E"
0043 PRINT 3;TAB(5);"PRINT MAILING TAPE"

0044 PRINT 4;TAB(5);"DELETE EXPIRED NAME
S"
0045 PRINT 5;TAB(5);"CHANGE INFO ON FILE
"
0046 PRINT 6;TAB(5);"PRINT LIST"
0047 PRINT 7;TAB(5);"LIST FILES"
0048 PRINT 8;TAB(5);"SEARCH"
0049 PRINT 9;TAB(5);"TRANSFER INFO TO OT
HER FILE"
0050 PRINT 0;TAB(5);"EXIT"
0051 PRINT
0060 INPUT "OPTION",O
0070 LET O=INT(O)
0071 IF O>9 THEN 60
0072 IF O<1 THEN END
0075 ON O GOTO 1000,3000,78,4000,5000,60
00,7000,8000,9000
0078 GOSUB 80
0079 GOTO 100
0080 INPUT "FILE NAME (NO EXT) ",F$
0090 LET F$=LEFT$(F$,6)+E$
0095 RETURN
0100 OPEN #1,F$
0105 INPUT "HOW MANY COPIES",Q
0106 FOR I9=1 TO Q
0110 RESTORE #1
0120 READ #1,N
0130 FOR I=1 TO N
0140 READ #1,N$,A$,C$,Z,D,I$
0145 IF D<T THEN 190
0150 PRINT #7,N$
0160 PRINT #7,A$
0170 PRINT #7,C$,
0173 IF Z<10000 THEN PRINT #7,"0";
0176 PRINT #7,Z
0180 PRINT #7
0190 NEXT I
0200 RESTORE #1
0210 SKIP #7,4
0220 PRINT #7,"EXPIRED SUBSCRIPTIONS"
0230 SKIP #7,3
0233 READ #1,N
0235 FOR I=1 TO N
0240 READ #1,N$,A$,C$,Z,D,I$
0250 IF D>T THEN 300
0260 PRINT #7,N$
0270 PRINT #7,A$
0280 PRINT #7,C$,
0283 IF Z<10000 THEN PRINT #7,"0";
0286 PRINT #7,Z
0290 PRINT #7,"EXPIRED ";D
0300 NEXT I
0305 NEXT I9
0310 CLOSE #1
0320 GOTO 39
1000 GOSUB 80
1020 OPEN #2,F$
1022 INPUT "NUMBER OF ENTRIES",N
1024 WRITE #2,N
1026 FOR I=1 TO N
1030 GOSUB 2000
1040 WRITE #2,N$,A$,C$,Z,D,I$
1050 NEXT I
1060 CLOSE #2
1070 GOTO 39
2000 INPUT "NAME",N$
2020 INPUT "ADDRESS",A$
2030 INPUT "CITY/STATE",C$
```

More

blank line between entries. (See Sample run 3.)

7. LIST FILES—lists all nonsystems (i.e., all files without a .$ extension) on the terminal. (See Sample run 1.)

8. SEARCH—searches for all entries within a file that meet the search criterion and prints all those entries. A search may be made on any category within the list, but only on one category. A search on strings looks for any string in the specified category that is identical to the search string, or for which the search string is a substring of the string in the category. Numerical searches request a range of values to search upon. (See Sample run 5.)

9. TRANSFER DATA TO OTHER FILE—searches for a specific name and, if found, will transfer the entire entry to another mailing list file, so that one name may appear in several files and need only be typed in once.

0. EXIT—returns to BASIC.

Using the Options

After you ask for each option (ex-

```
OPTION LIST

1   ENTER NEW FILE
2   ADD TO  EXISTING FILE
3   PRINT MAILING TAPE
4   DELETE EXPIRED NAMES
5   CHANGE  INFO ON FILE
6   PRINT LIST
7   LIST FILES
8   SEARCH
9   TRANSFER INFO TO OTHER FILE
0   EXIT

OPTION 6
FIILE NAME (NO EXT)? KILOBAUD
HOW MANY COPIES? 1
OUTPUT ON SCREEN OR PRINTER?
P



GENIUS
DR. GORDON W. WOLFE
PHYSICS DEPT.  U.M.
UNIVERSITY  MS  38677
8008

PRESIDENT
JAMES E. CARTER
1600 PENNSYLVANIA AVE
WASHINGTON DC   20044
8101

PUBLISHER/MICROCOMPUTING
WAYNE GREEN
PINE ST.
PETERBOROUGH  NH                  03458
9010

ESCAPEE FROM THE HOME
JOE KLOTZ
1234 ANYSTREET
SINGAPORE  SD   99999
7209
```

Sample run 3.

cept for options 0 and 7), the program will request the name of the source file (with no extension). The program will truncate the string to the first six characters and add the extension .LST. In this way, you can keep many lists on a disk.

Also notice that this makes it easier to remember filenames. In Sample run 3, the file used is KILOBA.LST; I enter KILOBAUD, meaning this is a demonstration for this article in *Kilobaud*, and the program uses only the first six letters.

Sample run 1 shows the format of the option list and the execution of the list files option. Notice that the listing includes *all* nonsystem files (files without a .$ extension) resident on the disk, including the disk operating system, disk file management, mailing list routine, files for other programs and the .LST files.

Sample run 3 shows the execution of option 6, which lists the contents of the file. I specify the filename (no extension), tell it I only want one copy (but I may print as many as I wish) and have it place the results on the terminal rather than the PR-40 print-

```
OPTION LIST

1   ENTER NEW FILE
2   ADD TO  EXISTING FILE
3   PRINT MAILING TAPE
4   DELETE EXPIRED NAMES
5   CHANGE  INFO ON FILE
6   PRINT LIST
7   LIST FILES
8   SEARCH
9   TRANSFER INFO TO OTHER FILE
0   EXIT

OPTION 5
FIILE NAME (NO EXT)? KILOBA

GENIUS
DR. GORDON W. WOLFE
PHYSICS DEPT. U.M.
UNIVERSITY  MS  38677
8088

ANY CHANGES (Y OR N)? Y
NAME? GORDON WOLFE
ADDRESS? PHYSICS DEPT U.M.
CITY/STATE? UNIVERSITY  MS
ZIP? 38677
IDENTIFIER? SUPERGENIUS
EXPIRES (MO,YR)? 99 ,99

PRESIDENT
JAMES E. CARTER
1600 PENNSYLVANIA AVE
WASHINGTON DC   20044
8101

ANY CHANGES (Y OR N)? N

PUBLISHER/MICROCOMPUTING
WAYNE GREEN
PINE ST.
PETERBOROUGH  NH                  03458
9010

ANY CHANGES (Y OR N)? N
```

Sample run 4.

Listing continued.

```
2040 INPUT "ZIP",Z
2050 INPUT "EXPIRES (MO,YR)",M1,Y1
2051 INPUT "IDENTIFIER",I$
2055 LET D=100*Y1+M1
2060 RETURN
3000 GOSUB 80
3010 OPEN #1,F$
3020 OPEN #2,D$
3030 READ #1,N
3040 INPUT "NUMBER OF NEW ENTRIES",N1
3050 LET N=N+N1
3060 WRITE #2,N
3070 FOR I=1 TO N-N1
3080 READ #1,N$,A$,C$,Z,D,I$
3090 WRITE #2,N$,A$,C$,Z,D,I$
3100 NEXT I
3110 FOR I=1 TO N1
3120 GOSUB 2000
3130 WRITE #2,N$,A$,C$,Z,D,I$
3140 NEXT I
3150 CLOSE #2
3155 CLOSE #1
3160 FDEL F$
3170 FREN D$,F$
3180 GOTO 39
4000 GOSUB 80
4020 OPEN #1,F$
4030 READ #1,N
4040 FOR I=1 TO N
4050 READ #1,N$,A$,C$,Z,D,I$
4060 IF DXT THEN N=N-1
4070 NEXT I
4080 OPEN #2,D$
4090 WRITE #2,N
4100 IF N=0 THEN 4300
4110 RESTORE #1
4120 READ #1,N1
4125 FOR I=1 TO N1
4130 READ #1,N$,A$,C$,Z,D,I$
4140 IF DXT THEN 4200
4150 WRITE #2,N$,A$,C$,Z,D,I$
4200 NEXT I
4300 CLOSE #1
4310 CLOSE #2
4320 FDEL F$
4330 FREN D$,F$
4340 GOTO 39
5000 GOSUB 80
5020 OPEN #1,F$
5025 OPEN #2,D$
5030 READ #1,N
5035 WRITE #2,N
5040 FOR I=1 TO N
5050 READ #1,N$,A$,C$,Z,D,I$
5060 HOME
5065 LET N2=1
5070 GOSUB 6050
5120 PRINT
5130 INPUT "ANY CHANGES? (Y OR N)",Y$
5140 LET Y$=LEFT$(Y$,1)
5150 IF Y$="Y" THEN 5170
5160 IF Y$<>"N" THEN 5130
5165 GOTO 5300
5170 GOSUB 2000
5300 WRITE #2,N$,A$,C$,Z,D,I$
5310 NEXT I
5320 GOTO 4300
6000 GOSUB 80
6001 INPUT "HOW MANY COPIES",X
6002 GOSUB 9300
6005 FOR Y=1 TO X
6010 OPEN #1,F$
6020 READ #1,N
6030 FOR I=1 TO N
6040 READ #1,N$,A$,C$,Z,D,I$
6044 GOSUB 6050
6046 GOTO 6110
6050 PRINT #N2
6060 PRINT #N2,I$
6070 PRINT #N2,N$
6080 PRINT #N2,A$
6090 PRINT #N2,C$,
6093 IF Z<10000 THEN PRINT #N2,"0";
6096 PRINT #N2,Z
6100 PRINT #N2,D
6105 RETURN
6110 NEXT I
6120 CLOSE #1
6124 PRINT : PRINT
6125 NEXT Y
```

More →

Buy by Mail and SAVE!

COMPUTERS



Intertec Superbrain SPECIALS

64K Ram, List $3495 ..... $2595
64K Quad, List $3995 ..... $2995

NorthStar

Horizon I 32K DD List $2695 ... CALL
Horizon I QD List $2995 ..... CALL
Horizon 2 32DD List $3095 ..... CALL
IntersystemDPS-1 List $1749 ... CALL



Cromemco Z-2H, List $9995 .. $7945
System 2, 64K List $4695 ..... $3749
System 3, 64K, List $7995 ..... $6395

Disk Systems

Thinker Toys Discus 2D $939
Dual Discus 2D $1559
Discus 2 + 2, List $1549 ..... $1259
M26 Hard Disk, List $4995 ..... $3949
Discus M-10, List $3695 ..... $2995

Printers & Terminals

Paper Tiger IDS-445 ..... $649
with graphic opton $719
Centronics 730-1, List $795 ..... $549
739-1, List $995 ..... $769
704-9 RS232 ..... $1495
704-11 ..... $1569
TI 810, List $1895 ..... $1489
NEC SPINWRITER 5530 ..... $2395
NEC SPINWRITER 5515, 5510 .. $2395
Diablo 630 List $2711 ..... $2399
Intertube III List $895 ..... $729
Zenith Z-19 ..... $719
Televideo 912C $679
920C $799
950 ..... $999
Hazeltine 1420 ..... $789
1500 ..... $845
Soroc 120 List $995 ..... $689
IQ135 ..... $719
140 ..... $994

Computers Wholesale

P.O. Box 144 Camillus, NY 13031 ↙227

VISA (315) 472-2582 master charge

Most items in stock for immediate delivery. Factory sealed cartons, w/full factory warranty. NYS residents add appropriate sales tax. Prices do not include shipping. VISA and Master Charge add 3%. C.O.D. orders require 25% deposit. Prices subject to change without notice.

TYPRINTER 450 $2100
45 CHAR/SEC DAISYWHEEL PRINTER/ TERMINAL. RS232; IDEAL FOR WORD PROCESSING; WILL SUPPORT DIABLO, QUME, AND NEC PROTOCOLS

TYPRINTER 550 $2300
SAME AS ABOVE BUT 55 CHAR/SEC PRINT SPEED

QUME $1000
55 CHAR/SEC OEM PRINTER MECHANISM

SHUGART 8" FLOPPY DISK DRIVES $360
SA800 SOFT-SECTORED SINGLE/DOUBLE DENSITY

MICROSWITCH KEYBOARDS $85
HALL EFFECT. ASCII MOD. 74SW12

INTERFACE $325
OEM DAISYWHEEL PRINTER INTERFACE. INTERFACES DIABLO OR QUME OEM PRINTER TO RS232 OR CENTRONICS PARALLEL

RIBBONS $2.50
DIABLO HYTYPE 1 OR QUME. CLOTH OR MULTI/STRIKE. 1 DOZ. MINIMUM

COMPUTER DYNAMICS, INC.
211 WHITE WATER
GREER, S.C. 29651 • (803) 244-7872
370

9 TRACK TAPE DRIVES

800 BPI
45 IPS
FULL MANUAL
$4850 VALUE



$2400
NEW IN ORIGINAL BOXES

PERTEC Model 8840A-9-45
INDUSTRY STANDARD INTERFACE
CAPABLE OF IND. STD. ANSI-IBM DATA FORMAT

- READ/WRITE DATA IN STANDARD ANSI-IBM COMPATIBLE FORMAT
- DUMP WINCHESTERS AND HARD DISKS; 10 inch reels hold up to 3600' of tape = 34.56 Megabytes unblocked.
- EXCHANGE DATA & PROGRAMS WITH LARGE MAIN FRAMES AT SCHOOL, WORK, SERVICE BUREAUS ETC.
- BARGAIN PRICED MINI-COMPUTER UPGRADE. OEM List $4850

A large OEM overstock makes these industry standard drives available at a fraction of their current list price. Full size drives handle up to 10.5 inch reels of standard inexpensive 1/2 inch mag tape. 19 inch rack mount or use right out of the box on steel shipping frame.

SPECIFICATION SUMMARY: 9-track, 800 BPI, dual head (read after write), 45 IPS read/write, 200 IPS rewind, BOT/EOT sensing, 110 VAC/60-Hz, solid state, recent manufacture, all I/O signals TTL/DTL compatible, tension arm tape buffering, full control panel. Call or write for full set of technical specifications.


INTERFACES: Electrovalue encourages the development of interfaces to popular systems. Interfaces exist for popular minis and are being developed for several hobby computers. If you'd like to develop and document an interface to a popular small system call to discuss discounts.

ELECTROVALUE INDUSTRIAL INC.
P.O. BOX 157-K
MORRIS PLAINS, NJ 07950
Formerly Electravalue Industrial

Phone reservations and questions are welcome
201/267-1117

ANALOG ⟷ DIGITAL
DIGITAL ⟷ ANALOG
CONVERSION MODULES

SOFTWARE GAIN CONTROL



For additional details about the AD-100-4 and other fine California Data Corporation 100% individually tested, high reliability products, circle the reader service card number below or for faster response write or call us.

CALIFORNIA DATA CORPORATION
3475 Old Conejo Road, Suite C-10
Newbury Park, CA 91320

(805) 498-3651

299

Listing continued.

```
6130 GOTO 39
7000 HOME
7010 FLIST
7030 WAIT 5
7034 GOTO 39
8000 REM SERRCH
8010 GOSUB 80
8020 OPEN #1,F$
8030 READ #1,N
8040 HOME :PRINT "SEARCH ON"
8050 PRINT 1;"NAME"
8051 PRINT 2;"ADDRESS"
8053 PRINT 3;"CITY"
8054 PRINT 4;"STATE"
8055 PRINT 5;"ZIP CODE"
8056 PRINT 6;"EXPIRATION DATE"
8057 PRINT 7;"IDENTIFIER"
8059 PRINT 8;"EXIT"
8060 INPUT "OPTION",O1
8070 LET O1=INT(O1)
8080 IF O1<1 THEN8040
8090 IF O1>=8 THEN 39
8095 GOSUB 9300
8100 ON O1 GOTO 8170,8290,8370,8870,8530
,8550,8450
8110 INPUT "SEARCH STRING",S$
8120 LET L=LEN(S$)
8130 RETURN
8140 INPUT "MAXIMUM VALUE",M2
8150 INPUT "MINIMUM VALUE",M1
8160 RETURN
8170 GOSUB 8110
8175 FOR I=1 TO N
8180 GOSUB 8905
8190 LET T$=N$
8200 GOSUB 8920
8210 IF M3=1 THEN GOSUB 8250
8220 NEXT I
8230 PRINT "END OF FILE ";F$
8240 GOTO 8270
8250 GOSUB 6050
8265 RETURN
8270 CLOSE #1
8280 GOTO 39
8290 GOSUB 8110
8300 FOR I=1 TO N
8310 GOSUB 8905
8320 LET T$=A$
8330 GOSUB 8920
8340 IF M3=1 THEN GOSUB 8250
8350 NEXT I
8360 GOTO 8230
8370 GOSUB 8110
8380 FOR I=1 TO N
8390 GOSUB 8905
8400 LET T$=C$
8410 GOSUB 8920
8420 IF M3=1 THEN GOSUB 8250
8430 NEXT I
8440 GOTO 8230
8450 GOSUB 8110
8460 FOR I=1 TO N
8470 GOSUB 8905
8480 LET T$=I$
8490 GOSUB 8920
8500 IF M3=1 THEN GOSUB 8250
8510 NEXT I
8520 GOTO 8230
8530 LET T=1
8540 GOTO 8560
8550 LET T=2
8560 GOSUB 8140
8570 FOR I=1 TO N
8580 GOSUB 8905
8590 IF T1(T)>M2 THEN 8710
8600 IF T1(T)<M1 THEN 8710
8650 LET N2=7
8700 GOSUB 6050
8710 REM NO MATCH
8720 NEXT I
8730 GOTO 8230
8870 GOSUB 8110
8880 LET S$=" "+S$
8890 GOTO 8380
8900 REM READ DATA FROM FILE
8905 READ #1,N$,A$,C$,T1(1),T1(2),I$
8910 LET Z=T1(1):D=T1(2)
8915 RETURN
8920 REM COMPARE STRINGS
8925 LET L2=LEN(T$)
```

More

er. The program reads the disk file and prints:

Identifier
Name
Address
City/state and zip
Expiration date
Blank line

for each entry in the file.

This could be used by itself as a mailing list. But option 3 will do the same without the identifier or the expiration date and will do it only on the PR-40 printer, so I can use peel-and-stick mailing labels (Sample run 2). Notice that only current subscriptions are printed, with an expiration list for renewal notices. In particular, notice that three subscribers will get their mailing, while Joe Klootz, who hasn't renewed his subscription, will get a reminder postcard. After printing, option 4 will delete his name.

Sample run 4 shows how changes are made. Option 5 is executed on the file KILOBA. In this case, I want to change the identifier on my name from "genius" to "supergenius." The program reads each entry from the disk and displays it and then asks for changes. If there are none, it reads and displays the next entry. If changes are to be made, the entire entry is reentered with corrections.

Sample run 5 demonstrates the search option. Option 8 is executed, and again the KILOBA file is specified.

At this point, the program asks what category to search. Suppose I wish to send letters to all presidents on the list (maybe I have a list of world leaders or a list of officers of local chapters within the state). "President" is an identifier, so I select option 7.

After specifying that I want the results on the terminal, I input the string "PRES" to search. The program will read the entire file, and anytime the substring "PRES" is found in an identifier string, the entry will be printed as shown. When the end of the file is reached, the program tells me, so I'll know it's done even if it hasn't found anything.

Also, note that it would have printed the entry if it had found an identifier "AXPLPRESYZT," since it contains "PRES."

No commas are allowed during string input. BASIC will truncate any string just before the comma, since it assumes you're ending one string and beginning another. This means that the usual method of entering city and

16 BIT 8086 MICRO SYSTEM

CP/M -86
TEC -86
BASIC-86

$3990

Available Now **Basic-86™-$350** **CP/M-86™-$250**

● IEEE 696 S-100 ● CPU w/Vectored Interrupts ● 24 Parallel I/O lines ● Two RS-232 Ports ● Baud rates from 50 to 19200 ● Independent baud rate for each serial port ● 32K static RAM (Expandable) ● ROM boot for CP/M-86™ ● Dual 8-inch Shugart floppies with controller ● Attractive desk top enclosure ● 64K Dynamic RAM opt. - Available Soon

Apple A/D Board	16 channel 12 bit	$495
Apple D/A and Parallel Output Board	2 channel 12 bit	$295
S-100 A/D Timer - TOD - Counter Board	16 channel 12 bit	$695
S-100 D/A Board	4 channel 12 bit	$395

Call for complete product line information.

TECMAR INC. ↙139

TECMAR, INC.
(216) 464-7410
23600 Mercantile Road ● Cleveland, OH. 44122

COMMODORE . . . HAZELTINE . . . MAXELL . . .
SAVINGS FOR THE SOPHISTICATED USER!

commodore

HARDWARE:

ITEM	LIST	DISCOUNT PRICE
1) 8032 80 column 32K	1795	1450
2) 8050 950K dual disk	1795	1450
3) 8010 IEEE modem	279	215
4) 4016 16K graphics	995	690
5) 4040 343K dual disk	1295	1025
6) 4010 speech synthesizer	395	315

SOFTWARE:

ITEM	LIST	DISCOUNT PRICE
1) Visicalc by PS	199	159
2) Word Pro 3 by PSI	250	205
3) Word Pro 3 +	295	230
4) Word Pro 4	375	270
5) Word pro 4 +	450	345

commodore
Micro Electronic Thermostat



Easy to install!
Easy to operate!
Tax Deductible (15%)
An energy solution that works!
Retail price $150, direct price $119.95

Superior capabilities at an efficient price. .



Hazeltine 1421

	List	1-3	4-6	7-10	11 up
Hazeltine 1421	$945	695	670	650	625

maxell



MD1-(Single sided, double density):
10/3.95 100/3.75 1000/3.55
MD2-(Double sided, double density):
10/4.90 100/4.70 1000/4.50

COLLECT TO ORDER—(219)277-8844, 9-6 EST

All orders shipped in factory fresh cartons. Manufacturer's warranties honored by Random Access.

Add 2% per order for shipping/handling. Minimum order is $25. Visa/MC accepted with 3% handling charge. CODs accepted with no extra charge. Orders shipped UPS within 3 working days.

Write for product information. Include SASE for prompt reply.

Circle reader service number to be sent upcoming catalog.

Random Access ↙142
51049 US 31 North
PO Box 1555
South Bend IN 46624

is HARD COPY STORAGE a problem?



KILOBAUD MICROCOMPUTING, as thick as it is, is more like a floppy when it comes to standing on the bookshelf. Try the **KILOBAUD MICROCOMPUTING** Library Shelf Boxes . . . sturdy corrugated white dirt-resistant cardboard boxes which will keep them from flopping around. We have self-sticking labels for the boxes, too, not only for **KILOBAUD MICROCOMPUTING,** but also for **73 Magazine, 80 MICRO-COMPUTING** . . . and for **CQ, QST, Ham Radio, Personal Computing, Radio Electronics, Interface Age,** and **Byte.** Ask for whatever stickers you want with your box order. They hold a full year of **KILOBAUD MICROCOMPUTING, 80 MICROCOMPUTING** . . . or **73 Magazine**. Your magazine library is your prime reference; keep it handy and keep it neat with these strong library shelf boxes. One box (BX-1000) is $2.00, 2-7 boxes (BX-1001) are $1.50 each, and eight or more boxes (BX-1002) are $1.25 each. Be sure to specify which labels we should send. Have your credit card handy and call our toll-free order number 800-258-5473, or use the order card in the back of the magazine and mail to:

kilobaud™
MICROCOMPUTING
peterborough nh 03458

You can keep up with the fast paced world of microcomputing. Subscribe to Kilobaud Microcomputing.

Kilobaud Microcomputing has more articles to keep you informed than any other microcomputing journal—three times more than the leading competitor. Kilobaud Microcomputing has programs that are useable and save you money. Plus Kilobaud Microcomputing has reviews, new products, ads to examine and news columns all designed to keep you up to date.

Subscribe today

↙See List of Advertisers on page 194

Single Board Microcomputer

QCB-9 YOUR LOGICAL CHOICE!



For The SS-50 or S-100 Bus

ONBOARD FEATURES:

• 6809 or 6802 Microprocessor	STD
• 24K bytes of EPROM/RAM space	STD
• Serial RS-232 port with 14 baud rates	STD
• 16 Decoded Address Lines	STD
• Jumper configurable Address Map	STD
• Floppy Disc Controller for three 5" Drives	Option
• Printer port, Centronic type compatible	Option
• Keyboard/Parallel interface	Option
• Runs Flex DOS	STD
• QBUG Resident Debug Monitor	STD
• 1K bytes of RAM and 2K bytes of EPROM	STD
• DEALER/OEM INQUIRIES INVITED	
• Check or Money Order	

• Price

QCB-9/6802 with STD features	$ 195.00
QCB-9/6809 with STD features	225.00
Floppy Controller Option	75.00
Printer/Keyboard Option	30.00

CALL (305) 974-0967

LOGICAL DEVICES, INC. ✓373
781 W. Oakland Park Blvd.
Ft. Lauderdale, Fla. 33311
Tel (305) 566-8103

LOGICAL

No. 4

UNBELIEVABLE OPPORTUNITY!

You've Written a Fantastic Game? Then We'd Like to Publish It!

We're looking for hot GAME programs:

ARCADE (HI-SPEED GRAPHICS)
ADVENTURE FORMAT
FANTASY WARGAMING
BOARD GAMES
LOGIC & PUZZLE GAMES

There's Gold in them there Games! Write for our free Programmer's Kit today.

INSTANT SOFTWARE, INC. ✓75
Submissions Dept.
Peterborough, NH 03458

Listing continued.

```
8920 LET M3=0
8930 IF L2<L THEN 8990
8935 FOR J=1 TO L2-L+1
8940 IF S$<>MID$(T$,J,J+L-1) THEN 8980
8950 REM MATCH
8960 LET M3=1
8970 GOTO 8990
8980 NEXT J
8990 RETURN
9000 HOME
9010 PRINT "SOURCE"
9020 GOSUB 80
9030 OPEN #1,F$
9040 PRINT "DESTINATION"
9050 GOSUB 80
9060 OPEN #2,F$
9070 OPEN #3,D$
9075 INPUT "NUMBER OF ITEMS TO TRANSFER"
,I1
9080 READ #2,N
9090 WRITE #3,N+I1
9095 FOR J=1 TO I1
9100 READ #1,M1
9105 INPUT "NAME TO TRANSFER",S$
9110 FOR I=1 TO M1
9120 GOSUB 8905
9130 IF N$<>S$ THEN 9160
9140 WRITE #3,N$,A$,C$,Z,D,I$
9150 GOTO 9170
9160 NEXT I
9170 RESTORE #1
9180 NEXT J
9190 CLOSE #1
9200 FOR I=1 TO N
9210 READ #2,N$,A$,C$,Z,D,I$
9220 WRITE #3,N$,A$,C$,Z,D,I$
9230 NEXT I
9240 CLOSE #2,#3
9250 FDEL F$
9260 FREN D$,F$
9270 GOTO 39
9300 PRINT "OUTPUT ON SCREEN OR PRINTER?
"
9305 LET N2=0
9310 INPUT Y$
9320 LET Y$=LEFT$(Y$,1)
9330 IF Y$="S" THEN N2=1
9340 IF Y$="P" THEN N2=7
9350 IF N2=0 THEN 9300
9360 RETURN
```

```
OPTION LIST

1  ENTER NEW FILE
2  ADD TO  EXISTING FILE
3  PRINT MAILING TAPE
4  DELETE EXPIRED NAMES
5  CHANGE  INFO ON FILE
6  PRINT LIST
7  LIST FILES
8  SEARCH
9  TRANSFER INFO TO OTHER FILE
0  EXIT

OPTION 8
FIILE NAME (NO EXT)? KILOBR


SEARCH ON
1 NAME
2 ADDRESS
3 CITY
4 STATE
5 ZIP CODE
6 EXPIRATION DATE
7 IDENTIFIER
8 EXIT
OPTION? 1
OUTPUT ON SCREEN OR PRINTER?
P
SEARCH STRING? CARTER


PRESIDENT
JAMES E. CARTER
1600 PENNSYLVANIA AVE
WASHINGTON DC   20044
8101
```

Sample run 5.

state—"Baltimore, MD"—will not work because ", MD" will be cut off. The program has been structured to use a space instead of a comma (i.e., "Baltimore MD").

City and state are in the same string. A search on the state assumes that there is a space just before the state. You need not enter this space when requested to do so for the search string, but it must be there on the file, so you must enter it when you originally enter the data.

An identifier entry is also included with the name and address information. This is a string variable, which may be anything at all. In keeping a mailing list of officers for my nonprofit group, I simply write the position, a slash and the name of the local branch. Keeping track of who's doing what is much easier.

For lists that do not deal with subscriptions and where a name does not expire at a fixed time, enter "99" for the month and year of expiration.

All information is stored in string format, except for zip codes and expiration dates, which are stored as numeric variables so that a sorting routine may be written to print a mailing tape in zip-code order to take advantage of the post office's reduced rates for pre-sorted mail. ■

CP/M SOFTWARE
QUALITY BUSINESS APPLICATIONS
LARGEST SELECTION IN U.S.A.

★ ★ ★ ★ SOFTWARE SPECIALS ★ ★ ★ ★

WORDSTAR™	MICROPRO	$319.00
MAILMERGE™	MICROPRO	$ 99.00
dBASE II™	Ashton-Tate	$595.00
NAME & ADDRESS	SSG	$ 99.00

MANUALS...CALL FOR INFO!

STANDARD SOFTWARE CORP. OF AMERICA ✓217
10 MAZZEO DRIVE, RANDOLPH, MA 02368
(617) 963-7220

ORDER INFORMATION
Call: (617) 963-7220
PROMPT DELIVERY!!
Shipping & Handling: $3.00
Items subject to availability
Prices subject to change
90 DAY WARRANTY!
Software sale conveys a license for use on one system. Payment UPS C.O.D. 5% Discount for prepaid orders. Mass. residents add 5%.
CP/M® Registered Trademark of Digital Research.

"ASK ABOUT OUR 14-DAY MONEY-BACK GUARANTEE. AVAILABLE ON MOST PACKAGES"

COMPUTER STOP

105

2545 W. 237 St. Torrance, CA. 90505

ORDER BY PHONE
MON.—SAT.
10-6

(213) 539-7670 PST
TELEX: 678401 TAB IRIN

LOWEST PRICES IN THE WEST,NORTH, SOUTH & EAST

apple computer
Sales and Service

APPLE /// OPTION A: 3850
APPLE /// 96K
Information Analyst Package
12" B/W Monitor

APPLE /// OPTION B: 4350
SAME AS OPTION A PLUS:
DISK II for APPLE ///

APPLE /// OPTION C: 4800
SAME AS OPTION A PLUS:
DISK II FOR APPLE ///
SILENTYPE Thermal Printer

APPLE HARDWARE

Parallel Printer Interface Card 160
Communications Card 195
High Speed Serial Interface 175
Pascal Language System 425
Centronics Printer Interface 185
Applesoft Firmware Card 160
Integer Firmware Card 160
Disk][with Controller DOS 3.3 529
Disk][only 475
Graphics Tablet 625

OTHER HARDWARE

Alf Music Synthesizer (3 Voice) 245
9 voice 175
ABT Numeric Keypad 119
Micromodem][..... 295
Apple Clock 245
Rom Plus with Keyboard Filter 175
Introl/X-10 System 250
Romwriter 150
DoubleVision 80 x 24 Video Interface 295
CCS Arithmetic Processor 399
CCS Parallel Interface 119
16K Ram Card 145
Microworks DS-65 Digisector 339
SVA 8 inch Disk Controller 335
Sup-R-Mod 30
CCS Synchronous Serial Interface 159
CCS Asynchronous Serial Interface 159
Corvus 10 Meg. Hard Disk 4395
Corvus Constellation 595

MISCELLANEOUS/SUPPLIES

16K RAM (200-250 NS) 49
Verbatium Datalife Diskette (Box of 10) 30
Dysan Diskettes (Box of 5) 22
Apple Diskettes (Box of 10) 45
Verbatim Diskette Boxes (Holds 50 Disks) 18
Silentype Paper (Box of 10 rolls) 40

APPLE][Plus
16K $1075
48K $1193
Disk][Drive .. $529
with Controller & Dos. 3.3
PASCAL SYSTEM
$425
Z-80 Softcard
$299

MONITORS/DISPLAYS

Leedex Video 100 12" 140
Sanyo 9" Monitor 195
KG-12C Green Phos. Monitor 275
Sanyo 12" Green Phosphor. Monitor 275
NEC 12" Green Phosphor. Monitor 275
Sanyo 12" B/W Monitor 250

PRINTERS

Apple Silentype with Interface 525
IDS445 (Paper Tiger) with Graphics 695
IDS460 with Graphics 1099
IDS560 with Graphics 1295
Centronics 737 895
NEC Spinwriter (RO, Serial) 2650

SOFTWARE

The Controller 525
Apple Post (Mailing List Program) 40
Easywriter Professional System 195
Apple Pie 2.0 95
DB Master Data Management 150
The Cashier 210
Apple Writer 65
Visicalc 125
CCA Data Management System 90
Full Screen Mapping for CCA DMS 59
Pascal Interactive Terminal Software (PITS) 29
Basic Interactive Terminal Software (BITS) 29
Data Capture 29
Data Factory DMS 95
Apple Plot 55
Apple Pilot 120
Magic Wand Word Processor (Needs Z-80 Softcard) 345
Dow Jones Portfolio Evaluator 45
Fortran 140

ORDERING INFORMATION: Phone orders invited using VISA, MASTERCARD or bank wire transfers. VISA & MC credit card service charge of 2%. Mail order may send charge card number (include expiration date), cashier's check, money order or personal check (allow 10 business days to clear). Please include a telephone number with all orders. Foreign orders (excluding Military PO's) add 5% for shipping. All funds must be in U.S. dollars (letters of credit permitted). Shipping, handling and insurance in U.S. add 2% (minimum $4.00). California residents add 6% sales tax. Our low margins prohibit us to send COD or on purchase orders or open account (please send for written quotation). All equipment is subject to price change and availability. Equipment is new and complete with the manufacturer warranty. We do not guarantee merchantibility of products sold. All returned equipment is subject to a 15% restocking fee. We ship most orders within 2 days.

WE ARE A MEMBER OF THE CHAMBER OF COMMERCE.

RETAIL STORE PRICES MAY DIFFER FROM MAIL ORDER PRICES.

PLEASE SEND ORDERS TO:
COMPUTER STOP, 2545 W. 237 St., TORRANCE, CA 90505

See List of Advertisers on page 194

Simulate planetary motion in the solar system using high-resolution graphics on the Apple II.

Electronic Orrery

By Fred J. Gunther

Have you ever visited a planetarium? Or perhaps taken a class in astronomy? If so, you have probably encountered an orrery—a mechanical model of the solar system.

An orrery usually consists of a box containing many interconnected gears. A number of smaller spheres, representing the planets, are connected to the gears so that they revolve around a central sphere, the Sun. The orrery shows the sequence, orbits and motions of the planets and some of the moons.

Driven by clockwork and controlled by the gears, these models have been built by clock instrument makers since the Middle Ages. This program lets you use your Apple II to bring modern technology to this traditional craft. Using Applesoft BASIC and high-resolution graphics, it will turn your Apple into a simple orrery.

The program in its present form could be used for a beginning course in earth science or astronomy. Or it could be used as a basis for a space wars game. The orrery can be as complex as you would like it.

The Program

I've made several adjustments to reduce the programming problems. First, the planetary orbits are circles rather than ellipses. (With the scales provided, though, you can't tell the difference.) Second, each planet, no matter how big or small, is represented by a single dot. (Again, this is a matter of scale.) And third, the program does not plot any moons, since they're too close to their primaries to show up on an orrery done to scale.

The program gives you a choice of scales. Different scales are needed to show details in the orbit and positions of the inner versus the outer planets. You can much better appreciate the size of the solar system

```
5  TEXT : HOME : CLEAR
10  DIM OP(9),PY(9),I(9)
50  GOTO 300
80  HOME : VTAB 21
90  PRINT "       A P P L E     O R R E R Y
100  REM   PLOT CIRCULAR ORBITS
105  REM  OFFSET PLUTO'S ORBIT TO SIMULATE ELLIPSE.
110  INVERSE : PRINT "DAY                YEAR  (EARTH)          ": NORMAL
115  HGR : HCOLOR= 7: POKE 34,22
120  LET W = (1 * PI) / 180
130  FOR J = 1 TO 9: LET R = OP(J) / SCALE
135  LET I(J) = I(J) + (PY(3) / PY(J) * TD)
140  LET Y = Z * I(J)
150  LET X = XC + R *  COS (W + Y)
160  LET Y = YC - R *  SIN (W + Y)
165  IF J = 9 THEN  LET X = X + (1500E06 / SCALE)
170  IF X > 279 OR X < 0 THEN  GOTO 190
175  IF Y > 159 OR Y < 0 THEN  GOTO 190
180  HPLOT X,Y
190  NEXT J: IF RBIT = 1 THEN  GOTO 200
195  CALL 62450
200  HPLOT XC - 1,YC TO XC + 1,YC
210  HPLOT XC,YC - 1 TO XC,YC + 1
215  PRINT I(3),I(3) / PY(3)
220  GOTO 130
300  REM  SET UP SOLAR SYSTEM
500  REM   OP(I) = DIAMETER OF PLANETARY ORBIT
505  REM  PY(I) = PLANETARY YEAR.
510  LET OP(1) = 57.9E06: LET PY(1) = 87.97
520  LET OP(2) = 108.2E06: LET PY(2) = 224.7
530  LET OP(3) = 149.6E06: LET PY(3) = 365.26
540  LET OP(4) = 227.9E06: LET PY(4) = 686.98
550  LET OP(5) = 778.3E06: LET PY(5) = 11.86 * PY(3)
560  LET OP(6) = 1427E06: LET PY(6) = 29.46 * PY(3)
570  LET OP(7) = 2869.6E06: LET PY(7) = 84.01 * PY(3)
580  LET OP(8) = 4496.6E06: LET PY(8) = 164.79 * PY(3)
590  LET OP(9) = 5.9E09: LET PY(9) = 248.4 * PY(3)
600  LET PI = 3.14159: LET P2 = PI * 2
650  FOR J = 0 TO 9:I(J) = 0: NEXT J
700  LET Z = P2 / 360
800  INPUT "SCALE = (5E5 -1E8) ";SCALE
820  PRINT "PLOT ORBITAL PATH (TYPE '1') OR"
825  PRINT : INPUT "PLANET POSITION ONLY (TYPE '0') ";RBIT
850  INPUT "SUN LOCATION (X,1-278; Y,1-158)? ";XC,YC
875  INPUT "TIME INCREMENT(DAYS) ";TD
1000  GOTO 80: END
```

Program listing.

Fred J. Gunther (9464 Wandering Way, Columbia, MD 21045) is a geologist who has been using computers in research and teaching for about 14 years.

when, at any scale that includes Pluto, the display shows the inner planets practically merged with the Sun. On the other hand, any scale that shows orbital details for the inner planets has all of the outer planets (except perhaps Jupiter) off the screen.

The program prompts for the scale factor when the run starts. Then it prompts you for the location of the Sun. The Sun must be on the display screen (between 1 and 158 vertically and 1 and 278 horizontally), but it does not have to be in the center of the display. It is OK for a planet to be beyond the screen boundary; in fact, that's where the outermost planets usually are.

The program always starts with the planets in a standard starting position. As it runs, each planet progresses around the Sun in its own orbit at its own rate. The progression is discontinuous rather than continuous; that is, the new position is shown for the planet after the passage of a certain amount of time (you are prompted to provide the time increment), usually one Earth day. The program also gives you the option of showing only the instantaneous location of each planet, or of showing all of the points that make up the orbital paths. In either case, a short time interval is appropriate for the inner planets and a long one for the outer planets.

Let's talk about "scale" for a moment. The scale factor requested at the start of the program run is divided into the distance from the Sun to the planet. This yields the orbital radius in screen units. For example, the *distance from the Earth* to the Sun is an average of 149.6×10^6 km (93×10^6 mi.). If you type in a scale factor of "1E6" (1.0×10^6), then the Earth-Sun radius will be represented by 150 screen units. This distance, one astronomical unit (1 AU), is a standard yardstick for measurement within and near the solar system.

```
 RUN
SCALE = (5E5 -1E8) 1E7
PLOT ORBITAL PATH (TYPE '1') OR

PLANET POSITION ONLY (TYPE '0') 0
SUN LOCATION (X,1-278; Y,1-158)? 100,80
TIME INCREMENT(DAYS) 5
        A P P L E    O R R E R Y
DAY                YEAR  (EARTH)
5                 .0136888792
10                .0273777583
15                .0410666375
20                .0547555166
25                .0684443958
30                .0821332749
35                .0958221541
40                .109511033
45                .123199912
50                .136888792
```

Input sequence and partial run.

Modifications

Experienced programmers will find certain modifications challenging. Try adding the Earth's moon. Try adding at least the Galilean moons to Jupiter. Add, if you can, the O'Neill space colonies at the Legrangian points for the Earth-Moon system. Add the Trojan asteroids (this is an easy one).

Try to add a few comets (start with a nice periodic one like Halley's Comet, but remember that it moves around the Sun in a direction opposite that of the planets). The comets must have elliptical orbits (Kepler's First Law of Planetary Motion) and obey the "equal areas in equal time" law (Kepler's Second Law).

Try making the orbit of Mercury properly elliptical and with the proper precession of its "aphelion" (closest approach to the Sun).

Not all added features can be appreciated at one scale, so add a scale-change feature, perhaps under the control of the game paddles. Add a window feature, perhaps under the control of a joystick, so that you can look at different portions of the solar system. (Hint—move the Sun relative to the screen.)

If you have added both a scale-change feature and a window feature, then add all of the moons, give each planet and large moon a disk rather than a point, and get ready for a grand tour of the solar system.■

Suggested Readings

Weaver, Kenneth F. "Voyage to the Planets." *National Geographic*, volume 138, number 2 (August 1970), pp. 147–193.

Henderson, Arthur, Jr., and Jerry Grey. *Exploration of the Solar System*. National Aeronautics and Space Administration EP-122. U.S. Government Printing Office, 1974. Washington, DC, 67 pp. $2.05.

"The Solar System." *Scientific American* (September 1975), 280 pp. Special issue.

Pournelle, J. E. "The Endless Frontier." In *The Endless Frontier*, Ace Books, 1974, pp. 3–24.

TRS-80*

SAVE A BUNDLE

When you buy your TRS-80™ equipment!

Use our toll free number to check our price before you buy a TRS-80™ . . . anywhere!

TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation

Don't Delay. . **Call Today**

HUB ✓189

SALES COMPANY

1412 WEST FAIRFIELD DR.

P.O. BOX 8098 PENSACOLA FL 32505

904/438-6507

nationwide 1-800-874-1551

SIEMENS FLOPPY DISK SALE!

■ We are an OEM for **SIEMENS** disk drives, and have we got a deal for you! **Floppy Disk Services** is selling the latest and greatest disk drives direct to you at prices you can't find anywhere else. We buy in big quantities to set the best prices and pass that savings on to you.

■ Looking for 8" drives? The **FDD-100-8** is the latest most updated model from **SIEMENS**. Single sided single or double density. These drives are built on tough chassis for years of trouble free use. They are rack mountable and Shugart compatible, both physically and electrically. Power requirements are simple just +24v and +5v, negative voltage not required. The motor is A.C. driven.

■ Need 5.25" drives? The **FDD-100-5** is for you. These drives are 35 or 40 track models and like their big brothers are the latest models from **SIEMENS**. They work perfectly with the **TRS-80 Mod 1** and are direct replacements for the drives used in **Heath** computers. Powered by just +12 and +5vdc.

ask about our 8"dual drive package for TRS-80 MOD II — $950.00

for **TWO** drive system

FDD-100-8d . . . $360.00 2 for $710

FDD-100-5b . . . $235.00 2 for $460.00

power conn. set 8" $3.50

Manuals (8" or 5.25") $13.00

8" package requires some assembly.
All shipping via U.P.S. rates.
Mastercard and Visa accepted.

✓191

Floppy Disk Services Inc.

C.N. 5212

Princeton, N.J. 08540

(609) 771-0374

master charge

VISA

✓See List of Advertisers on page 194

Here's an in-depth look at a word processor that has become the de facto standard for microcomputers.

Word Processor Extraordinaire

By Glenn A. Hart

WordStar is an integrated word-processing program for CP/M and derivative operating systems. Sold by MicroPro International Corporation (1299 Fourth Street, Suite 400, San Rafael, CA 94901), WordStar is a powerful and complex program which provides a high level of operating flexibility and has become almost a standard against which all microcomputer word processors are judged. After several generations of development, the newest version (2.26) contains even more features.

Installation

WordStar is unique in its ability to accommodate various operating environments. The distribution disk contains four files: a message file used to print the many prompts and messages to the user, an "uninstalled" WordStar system, an associated overlay file and an Install utility. After making safety backup copies, the user runs Install to customize Wordstar to his equipment configuration.

The various serial terminals and memory-mapped video boards which WordStar can support are listed in Table 1. Almost all major types are available, and instructions are also given to the technically adept to patch in nonstandard terminal drivers other than these. WordStar takes advantage of the special characteristics of most terminals, using reverse video, dual intensity, cursor addressing and clear screen, if available.

Two main classes of printers are supported: daisywheel and other similar printers and "Teletype-like" standard printers (which means practically any printer usable with a microcomputer). Specialty printers from Diablo, Qume and NEC are supported with special drivers, as indicated in Table 2, and WordStar will print bidirectionally with such printers, using a microspace justification algorithm which uses both added spacing between words and character spreading.

A memory location can be patched to change the spreading emphasis to less character spacing and more interword spacing if desired. Standard printers are further subdivided into those that can backspace or half linefeed in either direction, and WordStar will change the way it prints boldface, underscores and other special printing tasks to accommodate the printer's abilities.

If required by his printer, the user has a choice of communications protocols. The standard Diablo ETX/ACK is normally used, but the newer XON/XOFF (DC3/DC1) protocol is also supported, as is hardware handshaking or other protocols resident in the user's BIOS.

WordStar can communicate to the printer in different methods: Output can be sent to the standard CP/M LST: device, which would be the most normal setup; to secondary CP/M devices such as TTY: or CRT:; or directly through output ports unique to the user's hardware. Completely customized output drivers can also be added.

Unlike earlier versions, the newest WordStar is not set up for Imsai port configurations; the user must supply the hex address of his input and output data and control ports. WordStar will then determine the correct bits to use automatically. Direct output to the ports provides faster printer speed and results in better overall performance.

MicroPro is the only word processor supplier which provides the code necessary to customize the system to different terminals and printers. Other programs require that the hardware configuration be specified at the time the program is purchased, and the program then supplied will work only on that configuration. MicroPro's method allows the user with different printers to create special versions; I use two versions called WS1650 and WS1760 with my two very different printer terminals—a Diablo 1650 metal daisywheel terminal and a Xerox 1760 high-speed matrix terminal.

While the installation procedure is very well done and the documentation provided is excellent, novice users may have to do some digging in their manuals to decide what options to use. Of course, their dealers can configure the system *in advance*.

Start-Up

WordStar begins with a heading showing the equipment configuration which has been patched to the program. This and all other menus and prompts are shown in reverse video or highlighted areas if the terminal system supports such features. After a brief pause, the basic menu is displayed, with the program reminding you that "no file is now being edited." The choices available are shown in Table 3.

Glenn A. Hart is a computer consultant who resides at 51 Church Road, Monsey, NY 10952.

The difference between a "document" and a "non-document" is that documents are preformatted by WordStar and stored on disk that way (more about this later). Defaults for word-wrap, tabulation, justification and other parameters are also different, with the non-document mode used for assembly-language programs, high-level programs or any file which will be accessed by some other program. This distinction is necessary since WordStar inserts many control codes in a document file to control on-screen formatting, and these control codes make a document file incompatible with other programs.

WordStar has various levels of user prompting and assistance shown on the screen throughout the editing and printing process. These prompts explain almost all the commands available to the user and are necessary to make the system usable without an unacceptable amount of memorization or frequent references to the manual.

After a while, most of the common functions become familiar and the screen space taken up by the prompting menus can be better used to display more text. WordStar gives the user the ability to change the amount of prompting displayed to one of four "help levels."

Previously edited and formatted files can be printed without entering the editing process. You are asked for the name of the file to print, followed by either an escape or return. If an escape is entered, printing begins with certain default conditions. If a return is entered, you are asked whether disk file output is desired (to print a formatted file to disk for later viewing or further processing), what page to start and stop printing on, whether to pause for the paper to be changed after each page (for use with single sheets rather than continuous forms) and whether to use form feeds or line feeds to advance to the top of subsequent pages. Printing proceeds once these conditions are specified. Files can also be printed with an optional utility called Mail-Merge, which performs many other options and will be discussed later.

This "no-file" menu also performs many "operating system" type functions like deleting files, renaming files and copying files. Version 2.26 also allows running an unrelated program from WordStar with control returning to WordStar after completion of the run program. This is convenient if you use WordStar to prepare compiler programs. The compiler can be called from WordStar, and when errors are encountered WordStar will be automatically loaded to make the necessary corrections. Another use is to load one of the new spelling-correction programs from WordStar so the editor will be entered after the spelling errors are isolated.

Version 2.26 includes provisions for displaying a directory of files on the default disk (which can also be changed with a new "logged-disk" feature). The directory can be displayed during the "no-file" menu or while editing is in progress. The lack of such a directory feature was a major inconvenience in earlier versions of WordStar. Incidentally, Micro-Pro will upgrade earlier versions for a $25 copying charge and will supply the relevant new manual pages for $15.

Once the user indicates he wants to edit a file, the program prompts with a complete explanation of CP/M filenaming conventions and asks for the desired filename. No default extensions are provided, and the user is free to use whatever extension designations he wants (or none at all). WordStar either indicates that the file is new or reads in a portion of a preexisting file and displays the first menu and the initial screen of text. The handling of files too large to fit completely in memory is transparent to the user, with WordStar performing all disk reads and writes automatically.

```
Lear-Siegler ADM-3A                 Soroc IQ-120
Lear-Siegler ADM-31                 Perkin-Elmer 550 (Bantam)
Hazeltine 1500                      Televideo 912
Microterm ACT-IV                    Visual 200
Microterm ACT-V                     Flashwriter I
Beehive 150/Cromemco 3100           Flashwriter II
Imsai VIO                           SWTPC CT-82
Hewlett-Packard 2621 A/P            Compucolor 8001G
Infoton I-100                       TEC Model 571
Processor Tech Sol/VDM
```

Table 1. Terminals supported by version 2.26.

```
A   Any "Teletype-like" printer (i.e almost any printer)
C   "Teletype-like" printer that can BACKSPACE
D   DIABLO 1610/1620 daisy wheel printer
E   DIABLO 1640/1650 daisy wheel printer
F   QUME Sprint 5 daisy wheel printer
G   NEC Spin Writer 5510/5520 thimble printer
I   "Half-Line-Feed" Printers
U   No change
Z   None of the above

PLEASE ENTER SELECTION (1 LETTER):
```

Table 2. Printer menu.

```
        no file is now being edited

D=create or edit a Document file        H=set Help level
N=create or edit a Non-document file    X=eXit to system
M=Merge-print a file                    P=Print a file
F=File directory off (ON)               Y=delete a file
L=Change Logged disk                    O=cOpy a file
R=Run a program                         E=rEname a file

DIRECTORY of disk A:
WORDSTAR.REV WS1650.COM    WS1760.COM    WSMSGS.COM
```

Table 3. "No-file" menu.

Operation

The top screen line is a status line which always appears, even if the help level chosen inhibits some or all of the normal prompting. The status line indicates the current operating status and definitions in use, including the name of the file being edited; the page, line and column number for documents (lines and bytes from the beginning of the file for non-documents); INSERT ON, WAIT (usually during disk accesses); MAR REL

```
        PAGE 1  LINE 1  COL 1
CURSOR:    ^A=left word      ^S=left char      ^D=right char     ^F=right word
           ^E=up line        ^X=down line
SCROLL:    ^Z=up line        ^W=down line      ^C=up screen      ^R=down screen
DELETE:  DEL=char left       ^G=char right     ^T=word right     ^Y=entire line
OTHER:   ^V=insert on/off    ^X=tab          RETURN=end para     ^U=stop
       ^N=insert a RETURN    ^B=reform to end para       ^L=find/replace again
HELP: ^J displays menu of information commands
PREFIX KEYS   ^Q ^J ^K ^O ^P display menus of additional commands
L----!----!----!----!----!----!----!----!----!----!--------R
```

Table 4. Basic menu.

(margin release); LINE SPACING n (if more than single-spaced lines); and PRINT PAUSED (for insertion of single sheets). The status line is invaluable in determining what is going on and is displayed like a message, in highlighted or reverse video if available.

Under the status line is a "ruler line," which shows tab settings and the position of the left and right margins. This line can be disabled if desired, and tab settings can be changed at will. When menus are displayed, they displace the text which was under them, but everything returns to normal after the menu is removed. Note that all commands can be entered in either upper or lowercase.

Perhaps the best way to examine all the functions available in WordStar is to review the prompting menus and explain the various operations shown on each.

The Basic Menu

The basic menu (see Table 4) covers all the commands which can be entered with a single control character (indicated by ↑). The screen cursor can be moved in any direction a character at a time or a "word" at a time. Word boundaries do not include punctuation. The ability to move by words is unusual, and speeds cursor movement dramatically. The cursor will only move to areas which contain text, so moving down a line will often move the cursor to the left edge of the screen. The layout of the control codes chosen is very logical, with the functions of the codes suggested by the relationship of the keys on the keyboard. The cursor can also be moved in several other ways by more complicated commands.

Scrolling can be done in both directions either a line at a time or by chunks representing a little less than one full screen of text. This provides a useful overlap so each screen of information contains a bit of the preceding screen for continuity.

Simple deletions in either direction by character or word are possible. Entire lines or segments of lines in either direction can be deleted. Some of these commands are specified on the next menu.

Insert mode is toggled on or off with ↑V, and the status line indicates whether insertion is on or off. ↑N inserts a return, providing an empty line in the file for spacing or upon which to enter text. ↑U interrupts a command in progress, and ↑L repeats a search or find (more about searching later).

The ↑B command is a hint of what is probably WordStar's most dramatic and useful feature. As with many other word processors, text is entered continuously with no need for the typist to enter carriage returns at the end of screen lines. Words are automatically moved down to the next line (hyphenated words may be split at the hyphen) if they won't fit on the current line. But when WordStar completes filling a line of text, *each screen line is automatically formatted and justified just as it will appear in the final printed copy!*

The implications of this are tremendous. Not only can the typist see how each line will look and change words or spacing if desired, but the program can also keep track of how each page will look. WordStar displays an end of page indicator (a complete line of dashes followed by P) exactly where each page break will occur. This is invaluable in many respects. Widow paragraphs (only one or two lines at the end or beginning of a page) are easily avoided without conditional statements prefacing each paragraph. Multiple line headings can be typed in at the top of each page. Many other uses are possible as well.

The ↑B command also invokes another unique WordStar feature: hyphenation help. If a line is likely to look bad when printed due to the presence of a long word, the program will suggest that the word be hyphenated and will even recommend where to place the hyphen. The operator has the option of accepting the program's suggested location, moving the hyphen to another spot in the word or rejecting hyphenation entirely. Hyphenation help can be disabled if desired.

WordStar is the only word processor to incorporate these features. Now the meaning of the ↑B command can be understood: the ↑B command reformats each paragraph after insertions and/or deletions or when a completely different layout is desired. An entire document can be reformatted with a repeat command described later.


There are a few problems with this feature. Certain commands which set up formatting must be entered carefully and at the beginning of the document if pagination is to be accurate. Reformatting long paragraphs can take a few seconds, and even longer for a long document. Also, the formatting adds a lot of special control characters to the file to distinguish between spaces entered by the typist (which are always retained) and "soft" spaces inserted by the program for justification. This makes formatted text files much longer than normal files or the files produced by other word processors. All in all, however, the on-screen formatting and pagination are fantastic.

The basic menu continues with ↑J, the help command. When this command is invoked, a special menu appears which has helpful paragraphs explaining most functions or the meaning of special on-screen end of line indicators. This is useful for making sure of the correct usage of infrequently used commands, and is also a tremendous help in using the program without constant reference to the excellent but lengthy documentation.

The final menu entry indicates the "prefix keys," which allow use of the remainder of WordStar's commands as well as examining the various other menus. Entering just these control characters brings up the other menus, which then allow either the desired command to be entered and executed or a return to normal editing with the cursor returned to its previous position.

Note that other than the normal commands shown on the basic menu, all WordStar commands involve two or even three control or regular characters. Fortunately, the control key can be held down continuously while

HI-RES CROSSWORDS FOR APPLE II

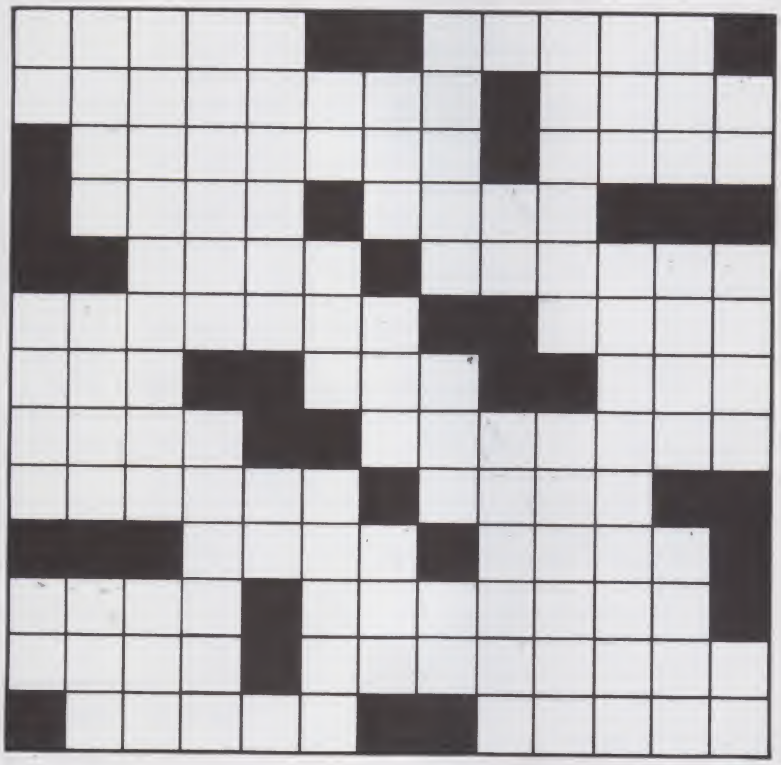

THE CROSSWORD MACHINE™

PLAY THE PUZZLES . . . EASY, HARD & TOPICAL . . . CREATE & PLAY YOUR OWN

MAIL ORDER SPECIAL $24.95 DISK

PLUS $2.00 POSTAGE AND HANDLING

DEALER INQUIRIES: L & S COMPUTERWARE, 1589 FRASER DR., SUNNYVALE, CA 94087

SYSTEM REQUIREMENTS: 48K, ROM APPLE SOFT

APPLE II IS A TRADEMARK OF APPLE COMPUTER INC.

NEED YOUR ORDER SHIPPED NOW?

THEN CALL TOLL FREE

(800) 227-1617 EXT. 481

master charge THE INTERBANK CARD

IN CALIFORNIA (800) 772-3545 EXT. 481

VISA

L&S COMPUTERWARE

P.O. BOX 70728, SUNNYVALE, CA 94086

SEND THE CROSSWORD MACHINE™

ENCLOSED $24.95 AND $2.00 POSTAGE AND HANDLING ☐ CHECK ☐ MONEYORDER

NAME _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

the sequence of letters is entered, and quickly entering the characters inhibits its display of the menu involved. This speeds things up quite a bit, but there is no question that a lot of control characters have to be typed. This is the price that must be paid for the large number of commands available.

It's almost a maxim that flexibility implies a certain complexity, and there just aren't enough keys on a keyboard to incorporate all of WordStar's commands without multiple keystrokes. WordStar's designers deliberately avoided the use of any special function keys which may be available on a given terminal, not only for portability but also because use of such keys is less comfortable and may actually slow throughput for experienced typists.

```
        ^Q PREFIX                    (to cancel prefix, hit SPACE bar)
CURSOR:  S=left Side screen   E=top screen    X=bottom       D=right enD line
         R=beginning file     C=end file      0-9, B, K, V, P = to marker
SCROLL:                  Z=continuous up      W=continuous down
DELETE TO END LINE:      DEL=left             Y=right
FIND, REPLACE:           F=Find a string      A=find And substitute
REPEAT NEXT COMMAND:     Q=repeat until key hit
```

Table 5. ↑Q menu.

The ↑Q Menu

The ↑Q menu (shown in Table 5) begins with more cursor control sequences. The cursor can be moved to either side or the top or bottom of the screen, the beginning or end of the file or to special markers which can be embedded in the text. Markers numbered 0 through 9 are inserted with commands shown on the next menu and allow jumping to specified places in the text. This is very useful with long files to mark and find the beginning of chapters, tables, etc. The cursor can also be moved to the beginning or end of marked blocks (explained later), the place where a block was moved from or to the position where the cursor was before a command which moves the cursor was executed.

This menu also completes the list of deletion commands which began on the basic menu. Note that the commands are logically organized; most of the commands are extensions of the single keystroke commands with the prefix ↑Q. This makes learning the double keystroke commands a much simpler task.

WordStar can repetitively execute many commands. Entering ↑Q↑Q followed by the desired command will begin execution at a default speed. A prompt appears which allows the user to speed up or slow down the repetitive process or interrupt it entirely. There are many uses for repetitive commands, including ↑Q↑Q↑B to reformat an entire document, ↑Q↑Q↑Y to remove all lines after the current one, etc.

This menu also contains the sequences for WordStar's comprehensive find, search and/or replace mechanism. All these instructions work similarly and with a reasonably simple syntax, but the flexibility provided is impressive. When one of these commands is entered, Word-

HOW TO START A COMPUTER BUSINESS




"Computer Business Opportunities 1981" annual report covers the best moneymaking ventures - consulting, software packages, dealerships, systems houses, services, repping, maintenance, vertical markets and much more - plus 20 steps on how to start, where to be in the 80's, the small business market, common entrepreneur's mistakes, financing, marketing, competing with biggies, directory of services and self-help sources, going part-time to full-time. Nowhere under one cover is a better industry perspective for self-employment planning. Contents from key back-articles of "Computer Opportunies," the entrepreneur's newsletter since 1978, "Low Capital Computer Business Guide" (10,000 copies sold), and continuous research from our field seminars. Over 200 pages ringbound, $65.00, check, Visa, Mastercharge, or written company P.O. 30 day refund guarantee.

DATASEARCH INCORPORATED ✓379
4954 William Arnold Road / Dept. F
Memphis, Tennessee 38117
For faster service on credit card orders, phone 901/761-9090

THE BIGGEST NAME IN LITTLE COMPUTERS™

TRS-80™ Model II — Your Best Buy In a Business Microcomputer



UP TO 15% OFF! on

TRS-80™ computers, software and peripherals

Similar values on all merchandise
CALL COLLECT:
915-283-2920 ✓214
Van Horn Office Supply
701 W. Broadway -- P O· Box 1060
Van Horn, Texas 79855
Dealer Goss
Form F48 Provided
Standard Warranty on Merchandise
THE NATIONWIDE SUPERMARKET OF SOUND®

```
        ^K PREFIX                          (to cancel prefix, hit SPACE bar)
END EDIT/SAVE:          D=Done edit     X=done, eXit     S=Save, reedit     Q=abandon
MARK BLOCK:             B=Block start   K=BlocK end      H=Hide/display
BLOCK OPERATIONS:       V=moVe block    C=Copy block     Y=delete block     W=Write
ADDITIONAL FILES        R=Read file     W=write block    J=delete file
  & PRINTING:           O=cOpy file     E=rEname file    P=Print a file
DISK & DIRECTORY:       L=change Logged disk             F=File directory on (OFF)
PLACE MARKERS:          0-9 = set/hide place marker 0-9
```

Table 6. ↑K menu.

Star prompts for the string to be found and, if a search and replace has been requested, the string to use as the replacement. The find string entered can contain special characters to specify classes of characters to match. ↑A matches any character, ↑S matches any character not a letter or digit, ↑Ox matches any character other than x, and ↑N matches the carriage return/line feed sequence. Although rarely used, these special "wild-card" characters permit very sophisticated searching procedures.

After obtaining the search and replace strings, the program prompts for any desired options, which include specifying the exact number of times to perform the operation, searching the entire file (global search), replacing without asking (the system normally moves the cursor to each located string, displays the surrounding area and asks if you do, in fact, wish to replace this particular occurrence), searching backwards instead of forwards, ignoring the distinction between upper and lowercase and searching for whole word occurrences only.


Global searches can be done without fear of changing an occurrence when you don't want to or changing a small part of a word unintentionally. How many of us have changed the word "date" to today's date on a file of multiple letters and accidentally also changed "candidate" to "candi-February 22, 1981"! With WordStar just specify option W and this can't happen.

Scrolling in either direction is provided. While acceptable in the forward direction, reverse scrolling is useful only on memory-mapped displays since a serial terminal must rewrite the entire screen. Most users will find it easier to page backwards rather than scroll.

The ↑K Menu

This menu is primarily concerned with file and block operations (see Table 6). Four ending sequences are available: the user can complete editing the current file and move on to editing a different one, complete the edit and exit WordStar to return to CP/M, save the current file and return to editing it (a useful safety option) or abandon the current edit in progress. WordStar automatically creates a backup file whenever it saves an edit or exits, so the previous version is always available in case of problems.

A block is a section of text which can be of any length. When the beginning and end points of the block are defined, WordStar highlights the entire block so there is no confusion

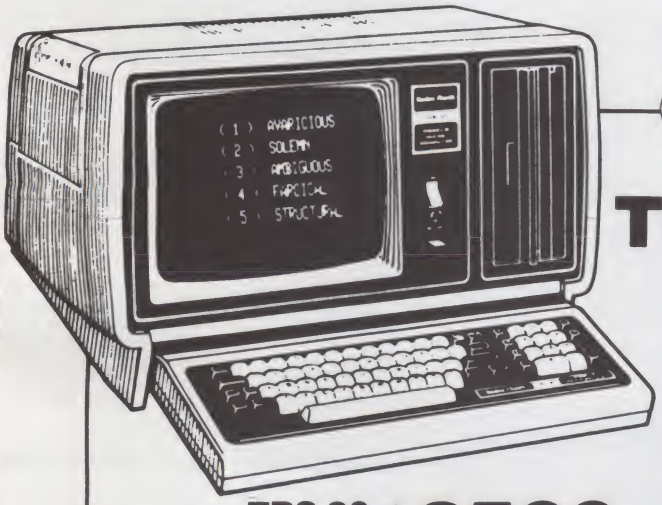


Radio Shack® DEALER


TRS-80™ DISCOUNT

☐ NO OUT-OF-STATE TAX
☐ NO SHIPPING COSTS

TRS-80 MODEL II 64K $3500
PACKS ENOUGH DATA HANDLING POWER FOR MANY SMALL BUSINESSES.



TRS-80 MODEL III 32K-2 DISKS $2100
NEW PERSONAL COMPUTER... REAL-TIME CLOCK, SHARPER CRT IMAGES AND FASTER LOADING CASSETTES



TRS-80 COLOR COMPUTER OR VIDEO $339 each
A LOW COST, COLOR COMPUTER FOR PERSONAL BUSINESS OR ENTERTAINMENT

CERTIFIED CHECKS
CASHIERS CHECKS
OR CREDIT CARDS
MasterCard VISA

PERRY OIL & GAS INC. ✓266
137 NORTH MAIN STREET, PERRY, MICH. 48872
PHONE (517) 625-4161

WARRANTIES HONORED BY ALL RADIO SHACKS • *T.M. TANDY CORP.

about the segment of text to be operated upon. The highlighting can be turned on or off ("hidden" or "displayed" in WordStar terminology), and the cursor can be moved to the beginning or end points as described earlier.

Once a block is defined, it can be moved to any other location in the file by simply moving the cursor to the desired destination and executing the ↑K↑V command. Similarly, a block can be copied to a new location, in which case the original block still exists at its original location, or a block can be deleted.

A block can also be written out to disk, and the program will ask what filename the block should be saved under. Blocks (or entire files) can also be read into the current file at the location of the cursor. This allows reading in boilerplate text, letterheads, etc., and makes generation of letters using standard paragraphs easy. Files can also be deleted, copied or renamed from this menu.

The logged disk feature changes the default disk (useful for getting a directory of a disk other than that from which WordStar was started) and toggles on or off the directory listing. If this feature is on, a complete directory is displayed (five files to a line) at all times between the basic menu and the ruler line. If the entire directory would occupy too much of the screen to allow convenient editing, WordStar displays only a few lines and allows the user to scroll the directory portion of the screen separately from the status displays and text.

↑K followed by a number between 0 and 9 sets the place markers (described earlier), which allow the cursor to be jumped around in a long file.

The final command on this menu prints a user-specified file. This seems simple enough until one realizes exactly what happens. WordStar can actually print one file while editing a completely different one! This is a form of multitasking, or spooling, and is a rarity on today's microcomputers. Keyboard response becomes rather sluggish in this foreground/background mode, however, so entry of text while simultaneously printing is likely to lose characters, especially if printing is directed through the CP/M LST: device.

The ↑O Menu

On-screen formatting is controlled by the commands listed in Table 7. Many of them are self-explanatory, but note that whatever formatting is specified occurs in full view on the screen. Margins can be set either to a specified column number or to the current position of the cursor; any desired tab stops can be set or cleared and are reflected in the tab ruler line below the status line; margins can be released as on a normal typewriter to allow hanging paragraphs; and various options can be toggled on or off. The status of several options is indicated on the menu itself by capitalizing and highlighting the status.

Version 2.26 allows special "soft" hyphens to be typed while text is entered if the ↑OE option is set. These "soft" hyphens (which are displayed highlighted) will only print if they appear at the end of a printed line. A normal "hard" hyphen always prints, so words like "mother-in-law" are handled correctly. Display of the soft hyphens (and other special WordStar characters embedded in the text) can be disabled to see exactly how printed lines will look.

In addition to regular tab stops, WordStar can set special "decimal tab stops." When the cursor is tabbed to such a column, numbers typed are entered to the left of the tab stop until a decimal point is typed. This makes entering numerical tables incredibly easy.

Tabs and/or margins can be set from a line in the file itself. If a line of dashes, exclamation points and pound signs is entered and the cursor is positioned on this line, the ↑OF command will automatically set regular tabs to the columns with exclamation points, decimal tabs to the columns with pound signs and the margins to the endpoints of the line. This is useful in setting up tabs for columnar tables, especially in reports which are prepared regularly; the tab line can be stored in the file and used to set up the format when the report is to be prepared again.

Finally, version 2.26 adds a "paragraph tabbing" feature, which temporarily indents the left margin to the next set tab stop until a carriage return is entered. This is very handy for outlines and other special formatting purposes.

The ↑P Menu

Table 8 shows the sequences to put a control character into the file. While this might be useful for special purposes, its main function is to control special printer actions. A wide variety of special functions can be decoded by the printing portion of WordStar. Underscoring (only the characters, not the spaces in between), boldface, double-strike, sub- and superscripts, ribbon color changes, overstriking a line (printing the same line of paper with two different lines of text), etc., are possible if your printer supports these functions. The newest version also supports strikeout and overprinting of single characters.

Pitch can be changed on daisywheel printers, printing can be momentarily suspended for typewheel changes, and the characters on some daisywheels which cannot normally be printed can be forced to print. A "non-break space" code, which prevents the word wrap routines from splitting a phrase at a space, can be entered; this is useful to prevent "February 22, 1981" from being split before the "22." Provisions are also made for calling in special user print-

^O PREFIX: on-screen formatting commands

S=set line Spacing	C=Center cursor line	F=margins/tabs from File line
L=set Left margin	X=margin release	E=soft hyphen - Entry on (OFF)
R=set Right margin	W=Word wrap off (ON)	D= -, print ctrl dspy off (ON)
I=set tab stop	J=Justification off (ON)	P=Page break display off (ON)
N=clear tab stop	V=Variable tabs off (ON)	T=Ruler display off (ON)
G=paraGraph tab	H=Hyphenate-Help on (OFF)	SPACE=cancel prefix

Table 7. ↑O menu.

^P PREFIX: Put Control Character in File

V=subscript begin/end	T=superscript begin/end	Y=ribbon color change
S=underScore begin/end	B=Boldface begin/end	D=Double strike begin/end
A=Alternate pitch	N=standard pitch	X=strikeout begin/end
O=non-break space	F=phantom space	G=ph. rubout (see manual)
C=pause when printing	H=overprint next character	RETURN=overprint next line
Q, W, E, R = user printer controls		SPACE=cancel prefix

Table 8. ↑P menu.

Success Talks.



"I particularly liked the help I received in rounding out the edges of my program . . . made it more marketable."

Charlie Heath
Author of the top microcomputer version of Othello, which recently beat all other microcomputer opponents in the Santa Cruz Open.



"They (Instant Software) *have the largest marketing organization, other than Tandy. This gives my program more exposure . . . and more sales."*

Terry Kepner
Author of ONE "D" MAILLIST, and numerous articles in the Industry's top magazines.

s a European programmer, I n safely say that Instant ftware, with its vast arketing and distribution twork, has proven to me to the best organization in the rld to submit my TRS-80 lity programs to."

Jake Commander
Author of over 10 top selling lity programs, and many arles on advanced computer ogramming techniques.



"One thing I've been impressed with is the scale of your Marketing capabilities. So many dealers . . . so many advertisements."

Mike Wall
Author of the best selling ASTEROIDS and COSMIC PATROL . Soon to be a Computer Science major at M.I.T.



These four Instant Software authors have all written programs proven successful in the marketplace. Now it's your turn.

If you're a programmer and are writing what you feel to be an exceptional software program, it's time to think about bringing it to market.

We believe it takes time, talent, training and experience to write good software. It also takes time, talent, training, experience and money to establish an effective marketing system. YOU have the first set of qualifications; WE have the second. Together, we can team up successfully to bring your program to market.

So, what's in this for you? Excellent royalty percentage, paid monthly. 26 sales reps covering the United States with only one objective—to sell your programs. 22 distributors located worldwide with the same sole objective. Over 450 Instant Software dealers in the US. Hundreds of thousands of catalogs, mailed directly to computer users throughout the U.S.A. and the world every three months, to continue your exposure to the buying public. Total support. Any questions?

Success speaks for itself. Let's talk. For a submissions package, write to:

Submissions Department
Instant Software, Inc.
Rt. 101 and Elm Street
Peterborough, N.H. 03458

or call 1-603-924-7296

nstant Software™

PETERBOROUGH
NEW HAMPSHIRE 03458

ist of Advertisers on page 194

```
                ^J PREFIX: help commands
H = display and set Help level      M = Margins and tabs
F = Flags in right screen column    S = Status line
I = command Index; entering text    R = Ruler line
B = paragraph reform (^B command)   V = moVing text
D = Dot commands, print controls    P = Place markers
                                    SPACE=cancel prefix
```

Table 9. ↑J menu.

Command	Function	Comment
.LH	Line Height	Sets line height in 1/48 inch increments
.PL	Page Length	Sets number of lines on page
.MT	Margin at Top	Sets number of lines in top margin
.MB	Margin at Bottom	Sets number of lines in bottom margin
.HM	Heading Margin	Sets number of lines in heading margin
.FM	Footing Margin	Sets number of lines in footing margin
.PC	Page # Column	Designates column in which page number will appear
.PO	Page Offset	Sets number of columns entire printed output will be offset from leftmost column
.PA	new Page	Forces start of new page
.CP	Conditional Page	Forces start of new page if specified number of lines not available on current page
.HE	Heading	Defines heading string to appear on each page
.FO	Footing	Defines footing string to appear on each page
.OP	Omit Page #'s	Turns page numbering off
.PN	Page Number	Turns page numbering on starting at specified #
.CW	Character Width	Sets character width in 1/120 inch increments
.SR	Subscript Roll	Sets height in 1/48 inch increments of sub- and super-script offset from main line
.UJ	Microjustify	Toggles microjustification on/off
.BP	Bidirectional Printing	Toggles bidirectional printing on/off
.IG	Ignore	Comment

Table 10. ↑Dot commands.

er control routines (for double width or double height characters, etc.) the user may have patched in.

The ↑J Menu

These sequences (see Table 9) provide helpful messages for beginning users or to remind more experienced users about infrequently used commands. The flags mentioned are special characters which WordStar displays in the far right-hand column of the video display and which indicate continuation lines (WordStar can easily handle line widths longer than 80 characters), "hard" carriage returns that mark the end of paragraphs, overstrike lines, abnormal conditions, etc.

Up to this point all the formatting commands have been reflected immediately on the video screen. WordStar also uses the embedded command system employed by separate text output processors. These "dot commands" (see Table 10) are entered with a period in the first column followed by a two-character command and any necessary parameters.

Dot commands control various printing options, including setting line height (in 1/48 of an inch on daisywheel printers), paper length, top and bottom margins, heading and footing margins, pagination on/off/set to a different number, conditional paging, page offset (to move the entire page a specified number of columns to the right for printer alignment), establishment of heading or footing text to appear on each page, changing character width (pitch) on specialty printers and specifying the location of the page number.

Command	Function	Comment
.DF	Data File	Specifies data file to be used
.RV	Read Variables	Gives name and order of variables to be read from data file
.RP	RePeat	Repeat processing specified number of times
.SV	Set Variable	Sets variable to specified value
.AV	Ask for Variable Value	Asks for variable value from operator, with prompt if desired
.DM	Display Message	Displays message on console
.CS	Clear Screen	Clear screen and display optional message
.FI	File Insert	Inserts specified file in printout
.PF	Print-time Formatting	Toggles print-time formatting on/off or allows discretion
.RM	Right Margin	Sets right margin or allows discretion to use margin in original text
.LM	Left Margin	Same as .RM for left margin
.LS	Line Spacing	Sets line spacing or allows discretion to use spacing in original text
.OJ	Output Justification	Toggles justification on/off or allows discretion
.IJ	Input Justified	Forces interpretation of input as justified under certain circumstances

Table 11. ↑Mail-Merge dot commands.

Mail-Merge

Mail-Merge is an optional module which provides enhanced printing capabilities, primarily the preparation of form letters, insertion of variable data into a document during printing, insertion of external files into the printout and printing multiple copies.

Mail-Merge has its own special set of dot commands which are listed in Table 11. The commands which specify the data file to be used and the named variables to read in order from the file operate in a straightforward manner and allow disks to be changed prior to reading the data file so that files too big to fit on one disk can be accommodated.

Other commands allow setting the value of variables which will appear throughout a document or accepting the value from the operator with prompting. The interaction with the operator can be enhanced with messages, screen formatting and other techniques. Named files can be included at print time, with up to eight-level nesting.

Variable names are inserted into a text file surrounded by ampersands. When the data file is read, the value of the variable read from the file will be substituted in the body of the text. Mail-Merge has several commands which control the reformatting of the printed output to accommodate the varying length of the substituted string. Most interesting is the fact that Mail-Merge can examine the input file to determine if it was justified or ragged-right or what margins were used, and will use the same techniques and values for the output printing if the operator has not reformatted according to a different set of

assumptions.

If a data file is read, Mail-Merge will continue repeating its printing task until the data file is exhausted. There are no provisions to selectively print records based on variable values or other criteria.

Mail-Merge is not as powerful as the similar provisions included with Magic Wand and some other word processors but performs satisfactorily in most applications.

Drawbacks

WordStar has a few drawbacks. First, it is costly. Not only is its selling price of $495 among the highest for a microcomputer word processor, but WordStar is also rather extravagant with both RAM memory and disk storage. Including CP/M and some working text areas, WordStar requires 45K of RAM, and an additional 3K is needed if simultaneous printing and editing is desired. 2K less is needed if a memory-mapped video board is used. With the "minimal" 45K system, the text buffers will be a bit small, necessitating more frequent disk accesses and somewhat slower operation.

WordStar's associated message file is 24K long in the newest version and the overlay file is 28K. With the 14K main WordStar file, about 66K of disk storage is consumed (add another 8K for the Mail-Merge module option). Remember also that formatted WordStar files can be very long because of all the embedded control characters (and the backup files are equally long), so the disk storage problem is even more severe if long files must be edited.

These problems certainly will affect some potential users much more than others. Users with eight-inch disk drives will not experience much difficulty, especially if double density is available, but mini-disk users will have to plan disk storage carefully (of course, WordStar can reside on one disk while the files to be edited are on another if you have a multiple disk system).

WordStar does not officially support true proportional spacing on those printers capable of this function. There is an unsupported and experimental implementation of proportional spacing which works reasonably well but is a bit difficult to use (insert control-P at the beginning of the file; this works only on lines which WordStar has formed and sometimes will not work on short lines). WordStar, like most word processors, also allows only one text file to be manipulated at a time. Some new programs allow multiple files to be open at the same time, facilitating movement of text from file to file without intermediate disk files.


Summary

WordStar is clearly one of the most, if not *the* most, powerful word processors available for microcomputers. In fact, I have used many large mainframe and dedicated word-processing systems costing tens of thousands of dollars which do not approach WordStar's power and flexibility. The documentation is excellent, although somewhat technically oriented in spots, and provides some help in training clerical staff on this complex system.

If your system can handle its RAM and disk storage requirements and you can afford its cost, MicroPro's impressive WordStar word processor is an excellent choice.■

YOUR APPLE SPECIALIST HAS THE WORD PROCESSOR FOR YOU...

WRITE-ON!™

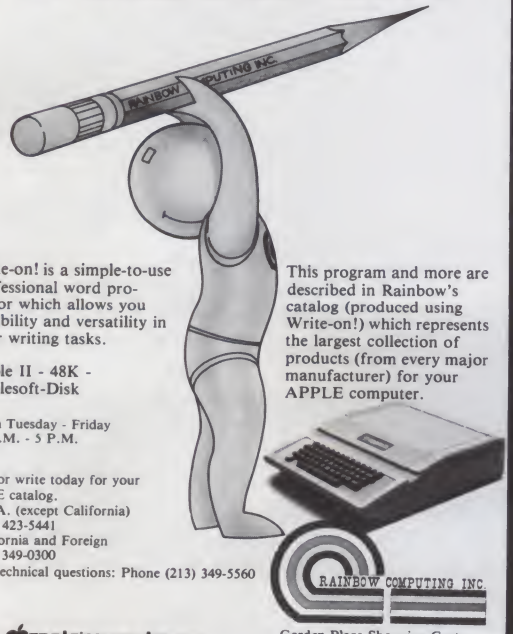

Write-on! is a simple-to-use professional word processor which allows you flexibility and versatility in your writing tasks.

Apple II - 48K - Applesoft-Disk

Open Tuesday - Friday
10 A.M. - 5 P.M.


Call or write today for your FREE catalog.
U.S.A. (except California)
(800) 423-5441
California and Foreign
(213) 349-0300
For technical questions: Phone (213) 349-5560

This program and more are described in Rainbow's catalog (produced using Write-on!) which represents the largest collection of products (from every major manufacturer) for your APPLE computer.

RAINBOW COMPUTING INC.

Garden Plaza Shopping Center
9719 Reseda Boulevard, Dept. KMW
Northridge, California U.S.A.
91324

apple computer inc.

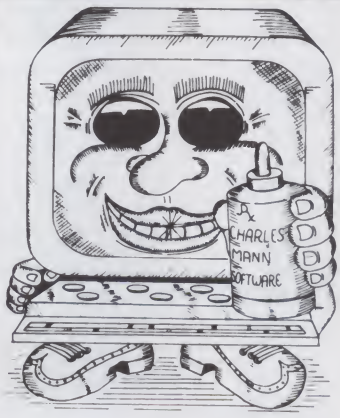

CURE TO SOFTWARE PROBLEMS

PROFESSIONAL SOFTWARE

Medical, Dental & Legal Systems,
Accounting & Financial, Educational,
Word Processing, Office Management

Check your Local Dealer or Contact:

Charles Mann & Associates ✓165
7594 San Remo Trail
Yucca Valley, Ca. 92284
(714) 365-9718

Apple II TRS-80 TI 99/4

✓See List of Advertisers on page 194

A Proven Formula To Program 2716s

By George Young

I had just blown my sixth 2716 when I couldn't even afford to blow the first one. So I decided to seek professional help—the JBE 2716 Programmer (from John Bell Engineering, PO Box 338, Redwood City, CA 94064).

The JBE 2716 EPROM Programmer was designed to use the JBE 6522 parallel interface board and four 16-pin DIP cables to couple to an Apple computer to program 2716s. Since my homebrew 6502 has two 6522 versatile interface adapters (VIAs) on its I/O board, and I had several DIP headers on hand, I didn't order the 6522 parallel interface board or the DIP cables which JBE offers as options.

Assembly of the board took a whole 20 minutes. The only problem you might possibly have is how to substitute plastic packaged transistors for metal-can transistors. Actually, if you look carefully at the silk-screen on the component side of the circuit board, it does show both transistor configurations. I would suggest mounting the 24-pin Textool Zero Force Insertion Socket with the lever on the 2716 pin-1 end. It will go on the board either way (with the lever near pin 1 or with the lever toward pin 12) and function equally well.

The reason for mounting it with the lever near pin 1 is that the silk-screen notched IC indicator completely vanishes beneath the Textool Socket once the socket is mounted. At some later date, you may not remember which way to insert your 2716s for programming, and the lever on pin 1 will serve to aid your memory.

Programming 2716s

Details for programming 2716s are included in the documentation with the 2716 kit. The data to be written to the 2716 is placed from 2000 hex to 27FF hex. The software that actually tells the two 6522s what to do is placed at 1000 hex. When the software reads the 2716 EPROM, it writes the EPROM bytes to 3000–37FF.

Now, my 6502 doesn't quite have all the memory that an Apple has (nor the price tag, either), so the first thing I had to do was move John Bell's software to address 0200 hex. Then I had to tell the 6522s to write the EPROM from addresses 1000–17FF and when reading the EPROM to store the EPROM bytes at 1800–1FFF. This was done without great problems once I was able to figure out exactly what JBE was doing with its software.

I'm sure that the testing I gave the JBE 2716 programmer far exceeds anything you or JBE might anticipate. I had already blown more 2716s than I could afford to blow. I was not about to insert another until I had thoroughly tested things out and assured myself that the programmer met all the Intel specifications set forth in the Memory Data Book for the 2716.

The four DIP cables from the 6522s went to the breadboard of the Design Console (see Kilobaud Klassroom June 1977, p. 78). The outputs of the 6522s were buffered and used to drive LED indicators that monitored addresses and data. The built-in logic probes of the Design Console monitored the PD/PGM lines and the +25 V line.

Delay routines were then written and patched into the JBE code. Now it was possible to run the software very slowly and see exactly how the JBE 2716 EPROM Programmer functioned and that it met each and every detail of the Intel 2716 programming specs.

JBE Code Modification

I added the following four bytes of code to the JBE code at address 10A4 in the JBE software:

C9 FF/F0 24

and then changed the subroutine call at address 1079 from 20 A8 10 to 20 A4 10. This change causes the bytes that are to retain the value FF to be skipped. This, in turn, allows the entire 2716 to be only partially programmed, and reduces the time to program the 2716 from 102 seconds for 2048 bytes to less than 102 seconds in proportion to the number of bytes left unprogrammed. This code change is not required, but it does serve a logical need and speeds up programming if you are not utilizing every byte of the 2716 matrix.

Once I was convinced that things were behaving as they were supposed to, the delay routines were removed and the code run at full machine speed. 102 seconds later the

George Young is an electronics instructor at Sierra High School, Tollhouse, CA 93667.

JBE 2716 EPROM Programmer LED monitor turned off as per the designer's statements of what is supposed to happen.

Several hours then elapsed while I wrote code to be placed in EPROM. Once this code was error-free (?), an Intel 2716 went into the Textool Zero Force Insertion Socket, and about 100 seconds later (some of the bytes were left unprogrammed) I had a programmed 2716 for use in my computer. I then discovered that the 'error free' code wasn't, and made the necessary corrections to the code and burned another EPROM. The EPROM with the bum code in it went into the EPROM Eraser and then back into stock.

Errors

JBE: Please make the following corrections to the documentation:

1) Line from pin 3 to J4 to pin 19 of EPROM socket should be A10 instead of A11.

2) Reverse arrow on emitter of Q3 to indicate an NPN transistor instead of a PNP transistor.

Assembly Help

1) Resistors and diodes mount on the board first, then the sockets, followed by the capacitors. The Zero Force Insertion Socket goes on last.

2) The electrolytics are marked ⇨ , or the negative end of the electrolytics are flagged. The board is marked for a positively flagged electrolytic. Use caution and get the electrolytic capacitors onto the board with the correct polarity.

3) One of the disk capacitors called for is .001 uF. This cap may be marked 102. (The indication means 1000 pF, which is .001 uF.)

4) The substitution of plastic packaged transistors for metal-can transistors was discussed earlier in the article.

5) Either mount the Textool Zero Force Insertion Socket with the notched end of the silk-screen indication and the Textool lever together, or place a piece of tape on the board to indicate the notched end of the 2716, or both.


Summary

It works like a charm. It programs Intel 2716s nicely. I also blew a 5-volt-only National 2716 with the programmer, but that's another story. Stick with Intel 2716s and you'll have no problems.■

ENTREPRENEURS NEEDED

MORE THAN EVER IN THE MICRO-COMPUTER INDUSTRY.

The shortage of knowledgeable dealers/distributors is the #1 problem of microcomputer manufacturers. Over 300 new systems houses will go into business this year, but the number falls short of the 1200 needed. It is estimated that the nationwide shortage of consultants will be over 3000 by 1981. The HOW TO manuals by Essex Publishing are your best guide to start participating in the continued microcomputer boom.



HOW TO START YOUR OWN SYSTEMS HOUSE
6th edition, March 1980

Written by the founder of a successful systems house, this fact-filled 220-page manual covers virtually all aspects of starting and operating a small systems company. It is abundant with useful, real-life samples: contracts, proposals, agreements and a complete business plan are included in full, and may be used immediately by the reader.

Proven, field-tested solutions to the many problems facing the small systems house are presented.

From the contents:
• New Generation of Systems Houses • The SBC Marketplace • Marketing Strategies • Vertical Markets & IAPs • Competitive Position/Plans of Major Vendors • Market Segment Selection & Evaluation • Selection of Equipment & Manufacturer • Make or Buy Decision • Becoming a Distributor • Getting Your Advertising Dollar's Worth • Your Salesmen: Where to Find Them • Product Pricing • The Selling Cycle • Handling the 12 Most Frequent Objections Raised by Prospects • Financing for the Customer • Leasing • Questions You Will Have to Answer Before the Prospect Buys • Producing the System • Installation, Acceptance, Collection • Documentation • Solutions to the Service Problem • Protecting Your Product • Should You Start Now? • How to Write a Good Business Plan • Raising Capital

$36. **No. 10**




HOW TO BECOME A SUCCESSFUL COMPUTER CONSULTANT
by Leslie Nelson, 2nd revised edition, Jan 1981

Independent consultants are becoming a vitally important factor in the microcomputer field, filling the gap between the computer vendors and commercial/industrial users. The rewards of the consultant can be high: freedom, more satisfying work and doubled or tripled income. **HOW TO BECOME A SUCCESSFUL COMPUTER CONSULTANT** provides comprehensive background information and step-by-step directions for those interested to explore this lucrative field:

• Established consulting markets • How to get started • Itemized start-up costs • Are you qualified? • Beginning on a part-time basis • The Marketing Kit • Should you advertise? • Five marketing tips • Getting free publicity • How much to charge • When do you need a contract? • Sample proposals • Which jobs should be declined • Future markets • The way to real big money • Avoiding the legal pitfalls • How consultants' associations can help you • The National Register of Computer Consultants • How others did it: real-life sample cases • and much more.

$28. **No. 16**



FREE-LANCE SOFTWARE MARKETING 3rd edition, June 1980

Writing and selling computer programs as an independent is a business where • you can get started quickly, with little capital investment • you can do it full time or part time • the potential profits are almost limitless. Since the demand for computer software of all kinds is growing at an explosive rate, the conditions for the small entrepreneur are outstanding.

This manual will show you how to sell your own computer programs using these proven techniques: • direct to industries • through consulting firms • through manufacturers of computer hardware • in book form • mail order • through computer stores. It will show you how to profitably sell and license all types of software ranging from sophisticated analytical programs selling for thousands of dollars, down to simple accounting routines and games for personal computers.

The book will guide you step by step through the process of marketing, advertising, negotiating a contract, installing software, training users and providing maintenance and support. It also contains sample software contracts that have been used in actual software transactions. Also included are tips on how to negotiate with a large corporation, ways of avoiding personal liability, techniques for obtaining free computer time and hints on how to run a free-lance software business while holding a full-time job.

$30. **No. 32**

ESSEX PUBLISHING CO. Dept. 1 ↙327
285 Bloomfield Avenue • Caldwell, N.J. 07006

Order books by number. Send check, money order (U.S. $). VISA or Master Charge #. Publisher pays 4th class shipping. For UPS shipping (USA only) add $1.00 per book. For Air Mail shipping add $2.50 per book in the USA. $6.00 in Mexico and Central America. $12.00 per book elsewhere. N.J. residents add 5% sales tax.
☐ No. 10 ☐ No. 16 ☐ No. 32 ☐ Check enclosed ☐ Credit card ☐ 4th class ☐ UPS ☐ Air

Name _____

Address _____

City _____ State _____ Zip _____

Card # _____ Exp _____
For faster shipment on credit card orders call (201) 783-6940 between 9 and 5 Eastern time.

↙See List of Advertisers on page 194

Ask for Instant Software at a computer store near you.

ALABAMA
ANDERSON COMPUTERS, Huntsville
COMPUTER CENTER, Tuscaloosa
COMPUTERLAND, Huntsville
OLENSKY BROTHERS, INC., Mobile
ALASKA
JUNEAU ELECTRONICS. Juneau
ARIZONA
COMMERCIAL & HOME SYSTEMS, Tucson
COMPUTER STORE, Phoenix
M & M ELECTRONICS, Safford
MESA ELECTRONICS, Mesa
MILLET'S ELECTRONICS, Mesa
PERSONAL COMPUTER PLACE, Mesa
PROFESSIONAL DATA SYSTEMS, Phoenix
RUSALEM ELECTRONICS, Sun City
SIMUTEK, Tucson
SOFTWARE STATION, Tempe
ARKANSAS
DR. JAMES A. CAPPS, JR., Springdale
CALIFORNIA
ADVANCE RADIO (R/S Dealer), Grass Valley
ADVANCED COMPUTER PRODUCTS, Santa Ana
AMCO ELECTRONIC SUPPLY, Azusa
BYTE INDUSTRIES, Hayward
BYTE SHOP, Cerritos
BYTE SHOP, Citrus Heights
BYTE SHOP, Mountain View
BYTE SHOP, Placentia
BYTE SHOP OF SOUTH SAN JOSE, San Jose
CAPITOL COMPUTER SYSTEMS, Sacramento
COAST ELECTRONICS, Morro Bay
COMPUTER HORIZONS, Camarillo
COMPUTER MART OF CALIFORNIA, INC., Diamond Bar
COMPUTER MERCHANT, San Diego
COMPUTER STORE, San Leandro
COMPUTER WORLD, Lawndale
COMPUTER WORLD, Westminster
COMPUTERLAND, El Cerrito
COMPUTERLAND, San Diego
COMPUTERLAND SOUTH BAY, Lawndale
DIMENSIONAL SOFTWARE, San Diego
ELECTRONIC SYSTEMS, San Jose
GRASS VALLEY COMPUTER SYSTEMS, Penn Valley
HOBBI-TRONICS, San Jose
HOBBY WORLD ELECTRONICS, Northridge
HOUSE OF 80, Artesia
HUNTINGTON COMPUTING, Corcoran
MALIBU MICROCOMPUTING, Malibu
MARFAM, San Jose
MICROCOMPUTER WAREHOUSE, Sacramento
MN & T INDUSTRIES, Lompoc
OPAMP/TECHNICAL BOOKS, Los Angeles
OPPORTUNITIES FOR LEARNING, Chatsworth
PC COMPUTERS, El Cerrito
Q I COMPUTER, INC., Lawndale
R&V SOUND (R/S Dealer), Fortuna
RADIO SHACK, San Diego
SILVER SPUR ELECTRONICS, Chino
SOFTWARE PLUS, El Toro
STRAWFLOWER ELECTRONICS (R/S Dealer), Half Moon Bay
WABASH APPLE, El Toro
WENNER BUSINESS SYSTEMS, Los Altos
COLORADO
APPARAT, INC., Denver
COLORADO COMPUTER SYSTEMS, Westminster
COMPUTER SHACK, Pueblo
COMPUTERLAND-NORTH DENVER, Arvada
POOR RICHARD'S CALCULATORS, Fort Collins
SOFTWARE GOURMET, Denver
CONNECTICUT
AM COMPUTER PRODUCTS, Southington
AMERICAN BUSINESS COMPUTERS, Groton
BYTE ME COMPUTER SHOP, New London
COMPUTER LAB, New London
COMPUTER STORE, Windsor Locks
COMPUTERLAND, Fairfield
COMPUTERLAND, Hamden
COMPUTERWORKS, INC., Westport
DIVERSIFIED ELECTRONICS, New Haven
EAB ENTERPRISES, Old Greenwich
INSTRUCTIONAL SYSTEMS COMPUTERS, Manchester
TECHNOLOGY SYSTEMS, Bethel
DELAWARE
MICRO PRODUCTS, Wilmington
OMNIFAX, Wilmington
DISTRICT OF COLUMBIA
THE PROGRAM STORE, Washington, D.C.
FLORIDA
ADVENTURE INTERNATIONAL, Casselberry
AMF MICROCOMPUTER CENTER, Tampa
ATLANTIC SALES, Miami
COMPUTER JUNCTION, Fort Lauderdale
COMPUTER SHACK, INC., Jacksonville
COMPUTER STORE, Clearwater
COMPUTER SYSTEM RESOURCES, Gainesville
COMPUTER WORLDS, Clearwater
COMPUTERLAND, Boca Raton
COMPUTERLAND, Fort Lauderdale
COMPUTERLAND, Jacksonville
COMPUTERLAND, Sarasota
COMPUTERLAND, Tampa
COMPUTERLAND, West Palm Beach
HEATHKIT ELECTRONIC CENTER, Hialeah
H.I.S. COMPUTERMATION, Melbourne
MICROCOMPUTER SYSTEMS, INC., Tampa
SOUND IDEAS, Gainesville
SOUTH EAST MICRO DATA, Orlando
WILLIAMS RADIO & T.V., Jacksonville
YOUR BASIC COMPUTER CENTER, Fort Pierce
GEORGIA
ATLANTA COMPUTER MART, Atlanta
BAILEY'S COMPUTER SHOP, Augusta
DELTA DATA DYNAMICS, Atlanta
FLEMING DRUG CO., Wrens
MICRO COMPUTER SYSTEMS, Atlanta
HAWAII
COMPUTER CENTER, Honolulu
COMPUTERLAND OF HAWAII, Honolulu
RADIO SHACK ASSOC. STORE, Honolulu
IDAHO
DENNIS STONE ENTERPRISES, Fruitland
ELECTRONIC SPECIALTIES, Boise
R & L DATA SYSTEMS, Idaho Falls
ILLINOIS
ALPINE COMPUTER CENTER, Rockford
BYTE SHOP, LaGrange
CHICAGO MAIN NEWSTAND, Evanston
COMPUTER STATION, Granite City
COMPUTER STORE, Rockford
COMPUTERLAND, Mundelein
COMPUTERLAND, Niles
COMPUTERLAND, Peoria
GARCIA AND ASSOCIATES, Chicago
ICOM, Lombard
MAIN STREET COMPUTER CO., Decatur
MIDWEST MICRO COMPUTERS, Lombard
WALLACE COMPUTERS, Peoria
INDIANA
COMPU-TECH MICROCOMPUTER SYSTEMS, Dunkirk
COMPUTER CENTER, South Bend
DIGITAL TECHNOLOGY, Lafayette
FALL CREEK ELECTRONICS, Pendleton
IOWA
BUSINESS DATA PROCESSING, Des Moines
CYBERIA, INC., Ames
MEMORY BANK, INC., Bettendorf
KANSAS
CENTRAL KANSAS COMPUTERS, Herington
LOUISIANA
ACME BOOK CO., Baton Rouge
MAINE
MAINE COMPUTRONICS, Bangor
MAINE MICRO SYSTEMS INC., Auburn
MID-MAINE COMPUTER COMPANY, Auburn
RADIO SHACK, South Portland
MARYLAND
CLAYTON ELECTRONICS, Towson
COMM CENTER, Laurel
COMPUTER AGE, Silver Springs
COMPUTERS ETC., Towson
JACK FIVES ELECTRONICS INC., Pikesville
PROGRAM STORE, Baltimore
SOLON SOFTWARE, Rockville
MASSACHUSETTS
COMPUTER CITY, Charlestown
COMPUTER PACKAGES UNLIMITED, West Boylston
COMPUTER VILLAGE, W. Springfield
LAND OF ELECTRONICS, Lynn
LIGHTHOUSE COMPUTER SOFTWARE, Rehoboth
MARK GORDON COMPUTERS, Cambridge
SMALL BUSINESS SYSTEMS GROUP, Dunstable
SOUND COMPANY, Springfield
TUFTS RADIO ELECTRONICS, Medford
MICHIGAN
ALL FOR LEARNING, W. Bloomfield
ALTERNATE SOURCE, Lansing
A.M. ELECTRONICS, Ann Arbor
COMIC KINGDOM, Detroit
COMPUTER CENTER, Garden City
COMPUTER CONNECTION, Farmington Hills
COMPUTER MART, Clawson
COMPUTER ROOM, Kalamazoo
COMPUTERLAND, Kentwood
COMPUTERLAND, Southfield
COMPUTRONIX, Midland
EIGHT BIT CORNER, Muskegon
FERRIS RADIO, Hazel Park
GOLDEN ANVIL, South Haven
HOBBY HOUSE, Battle Creek
LEVEL IV PRODUCTS, INC., Livonia
LYCEUM, INC., Warren
MAIN SYSTEMS, INC., Flint
MID-MICHIGAN MEMORY, Dimondale
NEWMAN COMPUTER EXCHANGE, Ann Arbor
TRI-COUNTY ELECTRONICS & SOUND CENTER, Fenton
WIZARD'S ARSENAL, East Lansing
YE OLDE TEACHERS SHOPPE, Ypsilanti
MINNESOTA
CODE ROOM, Eden Prairie
DIGITAL DEN, Burnsville
MINNESOTA SOFTWARE, White Bear Lake
PERSONAL BUSINESS SYSTEMS, Minneapolis
ZIM COMPUTERS, Brooklyn Center
MISSISSIPPI
C-COM, Jackson
DYER'S, INC., West Point
SOFTWAREHOUSE, Jackson
MISSOURI
CENTURY NEXT COMPUTERS, Columbia
COMP-U-TRS SOFTWARE CENTER, Florissant
COMPUTER CENTER, Joplin
COMPUTERMART, Springfield
CRC COMPUTERS, Joplin
PERSONAL COMPUTER, Carl Junction
RADIO SHACK, Warsaw
SOFTWARE SHACK, Belton
UNITED COMPUTER STORES, St. Charles
MONTANA
COMPUTER STORE, Billings
INTERMOUNTAIN COMPUTER, Livingston
NEBRASKA
APPLETREE SOFTWARE, Battle Creek
COMPUTERLAND, Omaha
COMPUTERS WEST, Omaha
MIDWEST COMPUTER CO., INC., Omaha
SCOTTSBLUFF TYPEWRITER & OFFICE PRODUCTS, Scottsbluff
NEVADA
BYTE SHOP, Reno
CENTURY 23, Las Vegas
HOME COMPUTERS, Las Vegas
HURLEY ELECTRONICS, Las Vegas
NEW HAMPSHIRE
BITSNBYTES COMPUTER CENTER, Concord
COMPUTER TOWN, Salem
COMPUTERLAND, Nashua
PAUL'S TV, Fremont
PORTSMOUTH COMPUTER CENTER, Portsmouth
RADIO SHACK ASSOC. STORE, Keene
STURDIVANT AND DUNN, Conway
NEW JERSEY
ABE'S TV SALES & SERVICE, Glassboro
BARGAIN BROTHERS, West Trenton
COMPUTER CORNER OF NJ, Pompton Plains
COMPUTER ENCOUNTER, Princeton
COMPUTER FORUM, Redbank
COMPUTER MADNESS, Englishtown
COMPUTER MART OF NJ, INC., Iselin
COMPUTERLAND, Cherry Hill
COMPUTERLAND, Paramus
CROWLEY'S, Whitehouse Station
DAVE'S ELECTRONICS, INC., Pennsville
ELECTRONIC WORLD, Mantua
G.S.B. ELECTRONICS, INC., Maple Shade
J & J ELECTRONICS, INC. (R/S Dealer), Hackettstown
LASHEN ELECTRONICS, INC., Denville
MIDAS DATA SYSTEMS INC., Marlton
OMNIFAX, Cherry Hill
RADIO SHACK ASSOC. STORE, Moorestown
SILENT PARTNER, Fort Lee
NEW MEXICO
AUTEL ELECTRONICS CO., Albuquerque
J&W ENTERPRISES, Clovis
MITCHELL MUSIC, Carlsbad
THOMAS E. CARR JEWELER, Alamogordo
WARGAMES WEST, Albuquerque
NEW YORK
A WORLD OF COMPUTERS, Port Chester
ARISTO CRAFT DISTINCTIVE MINIATURES, New York
ASD HOME COMPUTER CENTER, Poughkeepsie
BERLINER COMPUTER CENTER, New Hyde Park
C HABILD OF NEW DORP, Staten Island
COMPUTER CORNER, White Plains
COMPUTER ERA, New York
COMPUTER FACTORY, New York
COMPUTER RESOURCES, Williamsville
COMPUTER SHOP, Kingston
COMPUTER STORE, Rochester
COMPUTER TREE, INC., Endwell
COMPUTERLAND, Carle Place
COMPUTERLAND, White Plains
COMPUTERLAND OF NYC, New York
DIGIBYTE SYSTEMS, New York
80-MICROCOMPUTER SERVICES, Cohoes
FUTURE VISIONS COMPUTER STORE, Melville
HOME COMPUTER CENTER, Rochester
LONG ISLAND COMPUTER GENERAL STORE, Lynbrook
MR. COMPUTER, Wappingers Falls
OMNIFAX, DeWitt
SOFTRON SYSTEMS, Rensselaer
UPSTATE COMPUTER SHOP, New Hartford
NORTH CAROLINA
BYTE SHOP, Greensboro
SOUND MILL, Havelock
TD'S RECORD SHOP, Sylva
OHIO
ABACUS II, Toledo
ALTAIR SYSTEMS, INC., Dayton
ASTRO VIDEO ELECTRONICS, INC., Lancaster
BUS COMPUTER, Mentor
CINCINNATI COMPUTER STORE, Cincinnati
COMPUTER STORE, Toledo
COMPUTERLAND, Columbus
COMPUTERLAND, Mayfield Heights
COMPUTERLAND, North Olmsted
COMPUTERLAND, Warren
CUSTOM SOFT, INC., Louisville
H. GABRIEL & CO., Madison
JOBAR ENTERPRISES, Middlefield
MICROAGE, Columbus
MICRO COMPUTER CENTER, Centerville
MICRO ELECTRONICS INC., Columbus
MICRO-MINI COMPUTER WORLD, Columbus
TWENTY-FIRST CENTURY SHOP, Cincinnati
UNIVERSAL AMATEUR RADIO INC., Reynoldsburg
WANNA PLAY, Cincinnati
OKLAHOMA
COMPUTER STORE, INC., Tulsa
COMPUTER WORLD, Tulsa
RADIO SHACK ASSOC. STORE, Guymon
SOUNDS, ETC., Watonga
VERN STREET PRODUCTS, Sapulpa
OREGON
COMPUTER PATHWAYS, Salem
TRS-80 PRODUCTS LTD., Portland
PENNSYLVANIA
ALLIED HOBBIES, Philadelphia
ARTCO ELECTRONICS, Kingston
BELL ELECTRONICS, Girard
COMPUTER WORKSHOPPE, Monroeville
COMPUTERLAND, Gibsonia
COMPUTERLAND, Whitehall
COMPUTERLAND OF HARRISBURG, Mechanicsburg
ERIE COMPUTER, Erie
J & E COMMUNICATIONS, Duncansville
MIGHTY BYTE COMPUTER CENTER, Horsham
OMNIFAX, Feasterville
OMNIFAX, Philadelphia
PITTSBURGH COMPUTER STORE, Pittsburgh
STEVENS RADIO SHACK DEALER, Phoenixville
ROUTE 30 ELECTRONICS, Latrobe
TELEVISION PARTS COMPANY INC., New Brighton
WAYNESBURG RADIO, Waynesburg
SOUTH CAROLINA
OMNI ELECTRONICS, Charleston
TENNESSEE
ACE MINI SYSTEMS, Clarksville
CHATTANOOGA COMPUTER CENTER, Chattanooga
COMPUTER WORLD, Nashville
COMPUTERLAB, Memphis
H & H ELECTRONICS, Tullahoma
WEBB'S PHARMACY & ELECTRONICS, Harriman
TEXAS
CODEDATA, INC., Arlington
COMPUSHOP, Bellaire
COMPUSHOP/FM1960W, Houston
COMPUSHOP/N Fwy, Houston
COMPUSHOP, Richardson
COMPUTER 'N THINGS, Austin
COMPUTER CONCEPTS, Beaumont
COMPUTER HOBBY CENTER, Austin
COMPUTER PORT, Arlington
COMPUTER SALES AND SERVICE, Fort Worth
COMPUTER SOLUTIONS, San Antonio
COMPUTER TECH ASSOCIATES, El Paso
COMPUTERLAND OF SW HOUSTON, Houston
COMPUTERS BY O'NEILL, Lake Jackson
COMPUTEX, Webster
GATEWAY ELECTRONICS, Houston
KA ELECTRONICS, Dallas
MARYMAC INDUSTRIES (R/S Dealer), Houston
PAN AMERICAN ELECTRONICS (R/S Dealer), Mission
R.L. COLE'S ELECTRONICS, San Antonio
WAGHALTER BOOKS, INC., Houston
UTAH
COMPUTERLAND, Salt Lake City
CTI, Provo
QUALITY TECHNOLOGY, Salt Lake City
VIRGINIA
COMPUTER SOLUTIONS, Leesburg
COMPUTER WORKS, INC., Harrisonburg
HOME COMPUTER CENTER INC., Virginia Beach
LITTLE SOLDIER, Alexandria
WASHINGTON
AMERICAN MERCANTILE COMPANY, Seattle
BYTE SHOP, Bellevue
COMPUTER CONNECTION, Silverdale
COMPUTERLAND, Bellevue
COMPUTERLAND, Federal Way
EMPIRE ELECTRONICS, Seattle
LORDS, Port Angeles
MAGNOLIA MICRO SYSTEMS, Seattle
PERSONAL COMPUTERS, INC., Spokane
UNIVERSITY VILLAGE MUSIC, Seattle
WESTERN MICROCOMPUTER CENTER, Bellingham
WEST VIRGINIA
COMPUTER CORNER, Morgantown
COMPUTER STORE, Huntington
SOUND & ELECTRONIC SPECIALTIES, Morgantown
WISCONSIN
BYTE SHOP, Milwaukee
COLORTRON COMPUTER DIVISION, Racine
COMPUTER WORLD, Appleton
COMPUTERLAND, Madison
COMPUTERLAND, Milwaukee
COMPUTERLAND OF FOX RIVER VALLEY, Oshkosh
MAGIC LANTERN COMPUTER, Madison
PETTED MICROSYSTEMS, Milwaukee
RADIO SHACK, Mauston
S & O TV SALES, Monroe
SOFTWARE CASSETTES, Madison
WYOMING
COMPUTER CONCEPTS, Cheyenne
PUERTO RICO
MICRO COMPUTER STORE, Caparra Terrace


AUSTRALIA
*DeFOREST SOFTWARE, Nunawading, Vic.
CANADA
*MICRON DISTRIBUTING, Toronto, Ont.
Compumart, Ottawa, Ont.
Micromatic Systems Inc., Vancouver, B.C.
Micro Shack of W. Canada, Regina, Sask.
Orthon Holdings Ltd., Edmonton, Alb.
Total Computer Systems, Ajax, Ont.
CARIBBEAN ISLANDS, CENTRAL AND SOUTH AMERICA
*WEST INDIES SALES CO. LTD., Hialeah, FL, USA
FRANCE
*DANIEL P. LUCET, Alfortville
GREECE
*CARITATO TECHNICAL, Athens
HONG KONG
*ASSOCIATED INDUSTRIAL SUPPLIES, Hong Kong
ITALY
*BITS & BYTES, Milan
KOREA
*SIN HAN TRADING CORP., Seoul
NETHERLANDS & BELGIUM
*SOFTWARE IMPORT BRABANT, Eindhoven, Neth.
NEW ZEALAND
*VISCOUNT ELECTRONICS, Palmerston North
NORWAY
*A/S SORLUND, Vedavagen
REPUBLIC OF SINGAPORE
*OG BUSINESS COMPUTER, Singapore
SOUTH AFRICA
*BRIAN VICKERS, Sandton
SWEDEN
*SENTEC AB, Jarfalla
UNITED KINGDOM
*CALISTO COMPUTERS, Birmingham, Eng.
WEST GERMANY
*MICROSTUFF, Frankfurt
*REINHARD NEDELA, Markdorf

*Instant Software Distributor

Instant Software™
Peterborough, N.H. 03458

GO BOLDLY . . .

Where No TRS-80* Program Has Gone Before!

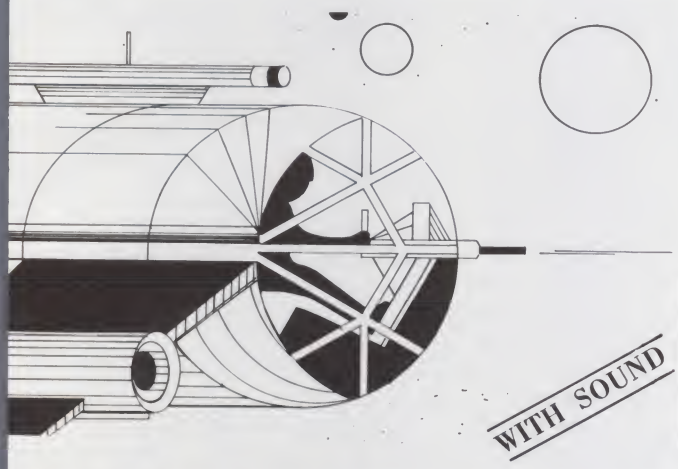

DANGER IN ORBIT


ATE: 28.02.2047
OCATION: 270 million miles from Terra
ISSION: Maintaining Terra's Space Lanes

iefing will follow:
Your mission is to destroy any eroids in your sector and to prevent en spacecraft from infiltrating the Ter- n Defense Network.
2 Your ship is armed with an anti-matter nnon. You can shoot large asteroids, t this turns them into many smaller eroids, each capable of destroying your p.
In addition, alien ships can make in- stantaneous hyperspace jumps into your area and start firing on your ship.
1.4 You'll need lightning reflexes and nerves of steel to survive Danger In Orbit. We have no use for non-survivors!

Danger In Orbit, a real-time, machine-language game, features variable levels of difficulty, superb high-speed graphics, sound effects and automatic score keeping. (T1 or T2)

Order No. 0237R $14.95 Tape.
Order No. 0247RD $19.95 Disk.

BALL TURRET GUNNER




For years the Petro Resource Conglomerate has attacked our photon collection stations and strangled our deep-space trade routes. The PRC Exxonerator Class light fighters (code name: Gnat) have been their main weapon. Now you can strike back, by joining the Ball Turret Gunner Service.

Imagine yourself at the control console of an LW-1417 Stratoblazer (Type B Strategic Laser Weapon). Your Hindsight Director informs you that a Gnat fighter is coming in for an attack. You pivot your gigawatt laser turret until you can see the target on your monitor. The Range Indicator shows him coming in fast. The Targeting Computer studies his course and speed as your finger tenses over the firing key. You know you'll have only a fraction of a second in which to react. The Gnat fighter's evasive maneuvers cause him to dance in your sights. Suddenly, you see the FIRE Command and you react instinctively. Your laser beam lashes out and reduces the Gnat to an expanding ball of ionized gas. Mission accomplished!

Ball Turret Gunner, with your choice of multiple levels of difficulty, optional sound effects and superb graphics, is more than just a game. It's an adventure. Experience it! (T1)

Order No. 0051R $9.95.

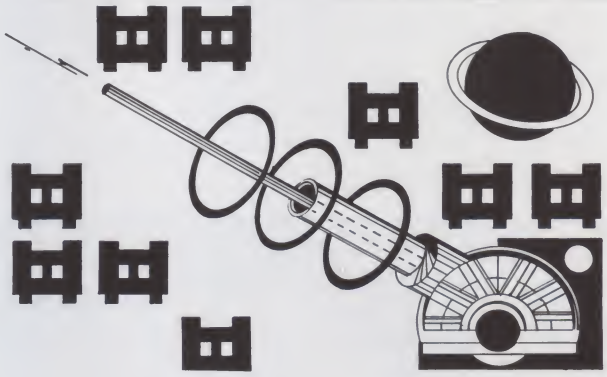



COSMIC PATROL

WARNING: PLAYERS OF THIS GAME SHOULD BE PREPARED FOR A STATE OF REALISM HITHERTO UNAVAILABLE ON THE TRS-80

Skilled players soon master many difficult computer games, but COSMIC PATROL is in a world all its own. The challenge intensifies! Supporting graphics and sound (optional) make each encounter an exciting new experience. It all adds up to a Super 3-S package. . . skill, sight and sound.

Scenario: The Cosmic Patrol program puts you in the command chair of a small interstellar patrol craft. Your mission is to defend Terran space and prey on the Quelon supply ships which carry essential parts and lubricants for that implacably hostile robotic force. The drone freighters are fairly easy pickings for the accomplished starship pilot, but beware of the I-Fighter escorts. They're armed, fast and piloted by intelligent robots linked to battle computers. They *never* miss.

The Cosmic Patrol program is not just another search and destroy game. With its fast, real-time action, impressive sound option and superb graphics, this machine-language program is the best of its genre.

Don't keep putting quarter after quarter into arcade games or spending big bucks for video game cartridges. Get Cosmic Patrol from Instant Software—and get the best for less! (T1 or T2)

Order No. 0223R $14.95 Tape.
Order No. 0224RD $19.95 Disk.

ALIEN ATTACK FORCE

The INVADERS are coming! Earth's defenses are dead except for your Laser base. Your assignment is to destroy the approaching INVADERS before they destroy Earth. Before Earth's sensors failed, they detected 550 armed invaders in space, speeding toward us in 10 attack formations of 55 in each group. The sensors detected four different types of attack craft: Large, Medium, Small, and short profile craft which is the most difficult to destroy. If you cannot stop these space attackers they will stop Earth. . . . . for good. (T1)

Order No. 0240R $9.95.

TO ORDER

See Your Local Instant Software Dealer or Call Toll-Free 1-800-258-5473
(Orders Only)
In NH dial 1-603-924-7296

Instant Software™

PETERBOROUGH, N.H. 03458

✓400

(T1) = TRS-80 Model 1, Level II, 16K RAM.

(T2) = TRS-80 Model 1, Level II 16K, expansion interface 16K + 1 disk drive.

Most people just sell disks. I sell you a complete system, and then I help you make it work.

It's called support, and it's a rare commodity in the *microcomputer* world.

It's also one big reason why they call my programs "the standard of the industry."

I'm Irwin Taranto, the one who changed the TRS-80* into a serious business computer. When you buy my TRS-80 systems (or, for that matter, one of my own computers that says "Taranto" on it), you buy me.

You buy my experience in making TRS-80 systems work in thousands of businesses around the world.

You buy the corrections, modifications and upgrades I constantly make on my TRS-80 systems.

And you buy my telephone number. You see, most of those thousand businesses needed a little help getting their systems up and going, and they called. We answered all their questions, and talked them through their problems. Every time the questions got really tough or really unusual, I'd answer them myself, on the phone, right then and there. I still do.

That pays off in two ways. It makes sure you get your systems working. It also alerts me to any little operating inefficiencies I might have designed into my systems. If there are any general business programs anywhere in the world, of any kind, that are checked out any better than my TRS-80 systems, I'd like to know about them.



I turned the TRS-80 into a serious computer.

The Model I, II and III business systems.

So far, I have six systems for the Model I, at $99 each:

Accounts Payable	General Ledger
Accounts Receivable	Payroll
Invoicing	Inventory Control

For the Cash Journal option on the General Ledger, add $50.

I also have six systems for the Model II:

General Ledger/Cash Journal	$ 299
Accounts Payable/Purchase Order	349
Open Accounts Receivable/Invoicing	349
Additional for Sales Analysis	100
Balance Forward Accounts Receivable	399
Payroll, without Job Costing	299
Additional for Job Costing	100
Inventory Control	399

For the Model III, we offer expanded versions of the six Model I systems, at $199 each.

Just call the number below and I'll send you any or all of the Model I or Model III systems by return mail. If you call about the Model II, I send you a questionnaire before I'll send you any systems. That lets me individualize the programs to your specific applications.

Why I call them "systems," not "programs."

There's a one-word answer: interaction. Each of the three sets of programs links to the General Ledger, and wherever it's useful, they cross-link to each other. For instance, "Sales Analysis" figures in a salesman's commission rate, so it links to "Payroll." Since it computes profitability within product categories, it links to "Invoicing."

That's what a system is. And that's one big difference between the Taranto TRS-80 business systems and somebody else's collection of business program disks.

If you like, I'll sell you the hardware, too.

I offer the TRS-80, Model II, along with selected peripherals. If you buy the computer from me, you get some extra advantages — hardware that's absolutely tailored to the programs, plus even more hand-holding from Taranto & Associates. The equipment won't cost you any more.

I can sell you a truly serious, completely supported, thoroughly proven business computer system for as little as $8000, hardware and software both.

There's nothing else like it in the market. Believe me, it's a far cry from that collection of program disks they're selling down the street.

Taranto
& ASSOCIATES, INC.

The Total System Store™

121 Paul Drive, San Rafael CA 94903.
Outside California, toll free (800) 227-2868. In California, (415) 472-2670.
Authorized dealers throughout America.

*A trademark of the Tandy Corporation

Here's an easy machine-language implementation of the IEEE 488 (GPIB) bus via SRQ line interrupts.

Get on the PET Instrument Bus

By Kepa Zubeldia

I followed the series on the IEEE 488 bus of the PET by Gregory Yob (July–September 1980 *Kilobaud Microcomputing*), and I think this will become a key reference text to PET users, especially those involved with instrumentation. My own experience with the GPIB and the PET should be useful. In my application, I had to interface the PET with an A/D converter to analyze data (simple weighted average) and display the results on the screen. It looked simple.

I chose the smallest PET, 8K RAM with built-in recorder and the HP47310A (same as HP59313A but painted white for hospital use) four-channel A/D converter with internal pacer.

After a few tries with the bus, I mastered the protocol sufficiently to select the channel on the converter and take readings. Since the A/D converter does not send a return at the end of the message, the program had to take the readings with a GET instruction inside a loop that checks for the status word.

Next I sent the command to turn on the converter's internal pacer, which was adjusted to take ten samples per second, while my loop kept waiting for the reading. It was so simple.

I also needed to switch channels and adjust the pacer rate in the converter between samples, so it would sample channel 1 every 200 ms and channel 2 every 600 ms. This was done with a table of sequential commands sent to the GPIB.

However, when I tried to add the algorithm to process all the information that the converter was sending, the program became too slow and began dropping samples. I improved the algorithm but nothing changed. The improved version of the algorithm was taking more than my 200 ms limit, and even if it was executed only once per second, it was too long.

As a temporary solution, I defined a 4K buffer which would store about 12 minutes of samples and then stop sampling and analyze that data. This proved unsatisfactory because of the discontinuous sampling and the time delay in the presentation of the results.

A solution emerged when I read *The PET Revealed*, published by Computabits Ltd., PO Box 13, Yeovil, Somerset, England. This is by far the best description available of the (old) PET and its inside magic.

Servicing the SRQ

The GPIB has an SRQ line that is made true (0) when an instrument in the bus needs service. The software needed to acknowledge this SRQ is not part of the PET ROMs, so this line is listed as unimplemented. However, the line is connected to the handshake line (CB1) of the PIA 2 and thus can generate interrupts to the microprocessor.

Whenever an interrupt is generated in the PET, it will jump to the address pointed to by locations 537 and 538. These locations point to the routine that flashes the cursor, updates the TI clock and scans the keyboard.

If you interfere with this vector in 537 and 538 and make it point to your own machine-language subroutine, it will jump there 60 times per second, because the PET is being interrupted at 60 Hz by the retrace line of the video display. All this is done in the background and is invisible to the user and to BASIC.

Therefore, you can make the SRQ line of the GPIB generate interrupts in the PET. But first there must be a machine-language routine to decide whether the interrupt was generated by the retrace line of the PET or the SRQ of the GPIB, and to service the corresponding source. This would also be invisible, and would run as a background job. Of course, it would slow down the foreground job (BASIC program or other machine-language program), but it would have the advantage of allowing indepen-

Kepa Zubeldia, 1820 E. Lindsey, Norman, OK 73071, is a medical doctor currently working on a PhD in Engineering.

SPECTACULAR OFFERS

BASF "FLEXYDISK"...
Superior Quality data storage medium.
Certified and guaranteed 100% error free.



SINGLE SIDED-SINGLE DENSITY

5¼" or 8" Diskettes ..... 10/$24
5¼" or 8" Vinyl Storage Pages .....10/$5

MAXELL- DISKETTES
The best quality diskette money can buy.
Approved by Shugart and IBM.
Sold only in boxes of 10



5", 1 side $3.30
8", 1-side $3.90
5", 2-side .....$4.2[illegible]
8", 2-side $5.60

ALL MAXELL DISKETTES ARE DOUBLE DENSITY

LIBRARY CASE...
3-ring binder album.
Protects your valuable programs or. disks
Fully enclosed and protected on all sides
Similar to Kas-sette storage box.



Library 3-Ring Binder $6.50
5¼" Mini Kas - sette/10 .....$2.49
8" Kas-sette/10 .....$2.99

DISKETTE DRIVE HEAD CLEANING KITS
Prevent head crashes and insure efficient, error-free operation.



5¼" or 8".....$19.50

SFD CASSETTES
C-10 Cassettes.....10/$7
(All cassettes include box & labels)
Get 8 cassettes,C-10 sonic and Cassette/8 library album for only..... $8.00
(As illustrated)



HARDHOLE
Reinforcing ring of tough mylar protects disk from damage



5¼" Applicator $3 5¼" Hardholes $6
8" Applicator $4 50/8" Hardholes $8

VISA • MASTERCHARGE • MONEY ORDERS CERTIFIED CHECK • FOR PERSONAL CHECKS ALLOW TWO WEEKS • C.O.D. REQUIRES A 10% DEPOSIT • CAL. RES. ADD 6% SALES TAX MIN $2 SHIPPING & HANDLING • MINIMUM ORDER $10 • SATISFACTION GUARANTEED OR FULL REFUND
Write for our free catalog

ABM PRODUCTS ✓273
8868 Clairemont Mesa Blvd.
San Diego, CA 92123
Toll Free
1-800-854-1555
For Orders Only
For information or California orders
(714) 268-3537

dent work of the GPIB.

There is a drawback—the interrupts are also used during cassette operations, so your background GPIB job will not run simultaneously with the PET cassette. The pointer must be restored to its original routine in ROM before cassette operations can be executed.

An example of implementation appears in the machine-language program shown in Listing 1. It is hand assembled and fits in the second cassette buffer with some room left over. The program checks for the SRQ line 60 times per second. If the SRQ is false (1), it will jump to the PET ROM interrupt-handling routine; if it is true (0), it will jump to the servicing routine for the A/D converter, which takes the data from the converter and saves it in a buffer, then sends some commands to the converter and finally jumps to the PET ROM interrupt-handling routine that originated the interrupt. While all this is done in the background, the BASIC program in the foreground is analyzing the data of the buffer that is being continuously updated by the background process.

In the program presented here, the interrupts are generated by the retrace line because it is the most frequent event (retrace at 60 Hz vs GPIB at 6 Hz). If your GPIB is requesting service more frequently than the retrace line, the interrupts should be generated by the SRQ. But if you inhibit the retrace interrupts, chances are that your PET will not like it; if the GPIB stops requesting service, the PET will not respond to the keyboard.

I suggest that you try this from a program (not from the keyboard): Use POKE 59411, PEEK(59411) AND 252 to inhibit retrace interrupts; the PET will not respond to the keyboard, not even the STOP key, and the cassette motor will be dead. Use POKE 59411, PEEK(59411) AND 252 OR 1 to enable the retrace interrupts and the PET will come to life again. If, instead of using 59411, you use 59427, you will be referring to the interrupts generated by the SRQ of the GPIB.

Example Program

The comments on the listing of the machine-language program (Listing

Listing 1. Machine-language implementation.

```
826     033A   78          SEI          ;Disable interrupts.
        033B   A9 03       LDA #$03     ;New high byte for interrupt
        033D   8D 1A 02    STA $021A    ;processing routine address.
        0340   A9 54       LDA #$54     ;Low byte of the address.
        0342   8D 19 02    STA $0219    ;
        0345   58          CLI          ;Enable interrupts.
        0346   60          RTS          ;Return to BASIC.
                                        ;This has changed the pointer
                                        ;of the interrupt servicing
                                        ;routine to point to our new
                                        ;routine in the second cassette
                                        ;buffer.
839     0347   78          SEI          ;Disable interrupts.
        0348   A9 E6       LDA #$E6     ;Original high byte (OLD ROM)
        034A   8D 1A 02    STA $021A    ;for interrupt proc. routine.
        034D   A9 85       LDA #$85     ;Original low byte of address
        034F   8D 19 02    STA $0219    ;in OLD ROM.
        0352   58          CLI          ;Enable interrupts.
        0353   60          RTS          ;Return to BASIC.
                                        ;This has set the pointer to
                                        ;the original interrupt routine
                                        ;in the ROM of high memory.
                                        ;Now the regular cassette
                                        ;operation is restored and the
                                        ;background servicing of the
                                        ;GPIB is suspended.
IRQNEW  0354   08          PHP          ;Save processor status and
        0355   48          PHA          ;save accumulator in stack.
        0356   AD 23 E8    LDA $E823    ;Get SRQ line in bit 7 of acc.
        0359   30 13       BMI SRQTRU   ;If SRQ true, go and service it.
GOTOLD  035B   68          PLA          ;Recover accumulator from stack.
        035C   28          PLP          ;Recover status word from stack.
        035D   4C 85 E6    JMP $E685    ;Continue the interrupt
                                        ;processing with the original
                                        ;interrupt routine of the
                                        ;OLD PET ROM.
                                        ;This branches to the SRQ
                                        ;service routine if the GPIB is
                                        ;requesting service, otherwise
                                        ;executes the original routine
                                        ;in the ROM.
SETATN  0360   A9 00       LDA #$00     ;Clear the acc. (See text).
        0362   8D 1D 02    STA $021D    ;Set the flag   (See text).
        0365   AD 40 E8    LDA $E840    ;These three lines set the
        0368   29 FB       AND #$FB     ;ATN line true in the GPIB
        036A   8D 40 E8    STA $E840    ;without changing anything else
        036D   60          RTS          ;Return to calling program.
```

More →

Listing 1 continued.

```
                                        ;This sets the ATN line true
                                        ;before sending any address to
                                        ;the GPIB. ATN will be set
                                        ;false by the routine in ROM
                                        ;that sends the address.
SRQTRU  036E    98              TYA     ;Copy the Y index to accum.
        036F    48              PHA     ;Save it in the stack.
        0370    A9 3C           LDA #$3C        ;Disable IRQ from PIA and then
        0372    8D 13 E8        STA $E813       ;no interrups from retrace.
        0375    20 60 03        JSR SETATN      ;Set ATN true.
        0378    A9 46           LDA #$46        ;This is the TALK address.
        037A    20 80 F1        JSR $F180       ;Send the TALK addr. (OLD ROM).
        037D    20 27 F2        JSR $F227       ;Get a byte from GPIB.
;This byte is discarded in my application. Add here your code to process this
;byte if you need it.
        0380    20 27 F2        JSR $F227       ;Get another byte from GPIB.
        0383    AC E3 03        LDY BUFPNT      ;Load my memory buffer pointer.
        0386    91 01           STA ($01),Y     ;Save the byte in the buffer.
        0388    AD 22 E8        LDA $E822       ;Enable further SRQ from PIA#2.
        038B    20 60 03        JSR SETATN      ;Set ATN true.
        038E    A9 26           LDA #$26        ;This is the LISTEN address.
        0390    20 80 F1        JSR $F180       ;Send the LISTEN add.(OLD ROM).
        0393    AC E2 03        LDY CMDPNT      ;Load the command pointer.
        0396    B9 D2 03        LDA CMDSEQ,Y    ;Get next comm. to send to GPIB.
        0399    20 2C F1        JSR $F12C       ;Send acc. to GPIB (OLD ROM).
        039C    88              DEY             ;Update command pointer.
        039D    B9 D2 03        LDA CMDSEQ,Y    ;Get next command to send.
        03A0    20 2C F1        JSR $F12C       ;Send it to GPIB (OLD ROM).
        03A3    88              DEY             ;Update command pointer.
        03A4    10 02           BPL UPDBUF      ;If comm. seq. not finished.
        03A6    A0 07           LDY #$07        ;Restore command pointer.
UPDBUF  03A8    8C E2 03        STY CMDPNT      ;Save updated command pointer.
        03AB    AC E3 03        LDY BUFPNT      ;Get the memory buffer pointer.
        03AE    C8              INY             ;Update it for next time.
        03AF    8C E3 03        STY BUFPNT      ;Save updated buffer pointer.
        03B2    D0 0C           BNE GETOUT      ;If no page crossing.
        03B4    E6 02           INC $02         ;Increment buffer page pointer.
        03B6    A9 20           LDA #$20        ;This is the highest page.
        03B8    C5 02           CMP $02         ;Compare to buffer page pointer.
        03BA    D0 04           BNE GETOUT      ;If not above highest page.
        03BC    A9 18           LDA #$18        ;This is the lowest page.
        03BE    85 02           STA $02         ;Restore buffer page pointer.
GETOUT  03C0    68              PLA             ;Get Y index from stack to acc.
        03C1    A8              TAY             ;Restore original Y index.
        03C2    A9 3D           LDA #$3D        ;Enable IRQ from PIA and then
        03C4    8D 13 E8        STA $E813       ;Enable interrupts from retrace.
        03C7    4C 5B 03        JMP GOTOLD      ;Continue with the PET ROM to
                                        ;give service to the IRQ that
                                        ;originated this execution.
CMDSEQ  03D2    47 31           .TXT 'G1'       ;This is the command sequence
        03D4    46 31           .TXT 'F1'       ;that is sent to the GPIB, two
        03D6    46 32           .TXT 'F2'       ;bytes each time the SRQ is
        03D8    47 31           .TXT 'G1'       ;given service. At the end of
                                        ;the sequence, the pointer is
                                        ;restored to the beginning.
                                        ;
                                        ;
CMDPNT  03E2    07              .BYT $07        ;This is the pointer for the
                                        ;command sequence above.
BUFPNT  03E3    00              .BYT $00        ;This is the pointer for the
                                        ;memory buffer.
```

1) are self-explanatory.

The section labeled 826 causes the interrupt vector at locations 537 and 538 to point to the interrupt controller (IRQNEW) that services the GPIB if SRQ is true, and services the retrace if SRQ is false.

The section labeled 839 restores the original interrupt vector to the interrupt-processing routine in ROM in the PET. This is the reverse function of the previous section.


These two sections are called from BASIC (see Listing 2) using the SYS function. An interrupt from the retrace line could occur in the middle of these calls, and then the vector of 537 and 538 would be undefined, so they should be executed with the interrupt disabled as shown in those sections.

The section labeled IRQNEW is the new interrupt-dispatching routine. When an interrupt is generated by the retrace line, the processor gets the vector from 537 and 538, and, as it has the address of IRQNEW, it begins executing this code. After saving needed information in the stack, it checks the SRQ line. If this line is true, it will give service to the GPIB and then to the PET retrace interrupt; otherwise, it will service only the PET retrace.

Here the stack is used as a safe place to store needed information that the GPIB routine would destroy. The information is recovered from the stack before going to the ROM routine. Make sure you do this if you want to preserve the process of your foreground program.

The section labeled SETATN is a subroutine to set the ATN line true (0) prior to sending addresses to the GPIB. It also sets the flag to zero. If the flag is zero or $FF, the EOI line will not be made true during the transmission of that byte. This is a re-

meet a REAL PLUS




Color Computer 4K $310



Model III 16K $859



Pocket Computer $199



Model II 64K $3375

These are just a few of our many fine offers — computers, peripherals, modems, printers, disc drives and an unusual selection of package values. Call TOLL FREE today and check us out for price and warranty.

Pure Radio Shack equipment warranteed at any Radio Shack store or dealer. Factory warrantees on Apple and Atari equipment. Other equipment carries manufacturer's warranty or Computer Plus 180 day extended warranty. Combined warrantees carry Computer Plus 180 day warranty or original manufacturer's warranty.

DEALER INQUIRIES ARE INVITED

Prices subject to change without notice.

TRS-80 is a registered trademark of Tandy Corp.

call TOLL FREE
1-800-343-8124

computer plus

Write for your free catalog ...

Dept. K

245A Great Road
Littleton, MA 01460

(617) 486-3193

362

See List of Advertisers on page 194

quirement of the routine in the PET ROM.

The main GPIB service program is labeled SRQTRU. It begins saving the Y register in the stack, as this program will use it, and then inhibits further interrupts from the retrace, in case the GPIB protocol takes too long to complete. It then sends the talk address of the A/D converter that is requesting service.

The converter talks back and sends two bytes. I do not need the first byte, so I discard it. The second byte is saved in the buffer in high memory, using an indirect address stored in 1 and 2 (these locations are commonly used for the USR function), and an offset pointer.

The next step is to read register B of PIA 2, even if it is defined as output. This resets the logic inside PIA 2 so it will process the next SRQ; this can be done any time before exiting, but it must be done.

You will notice that the entry point I used to get a byte from the bus is different from the one listed by Yob. This is because my entry point checks first for the status word, and if it is different from zero it will not go to the GPIB handshaking protocol. Of course, this is optional, and his entry point ($F187) works perfectly too.

In his table Yob does not indicate how to send the talk and listen address to the instruments. The entry point is $F180 (61824) for the old PET and $F185 (61829) for the new PET. This will send the contents of the accumulator as a talk/listen address—a talk address in the range $40 to $5F and a listen address in the range of $20 to $3F. You can address all instruments in the GPIB, even in the range 0 to 3 where the PET has the keyboard, video display and cassette recorders.

Having set the ATN true with the subroutine, I now send the listen address to my GPIB device number 6, and then send the character from my command sequence to the bus. Here again I use a different entry point. My entry point will complement the accumulator, store it in the $0222 buf-

```
10 POKE 132,0 : POKE 133,24 : REM set top of string space
20 POKE 134,0 : POKE 135,24 : REM set top of memory
30 POKE 1,0 : POKE 2,24 : REM set base of buffer address
40 FOR I% = 826 TO 995
50 READ BYTE
60 POKE I%,BYTE
70 NEXT
80 OPEN 1,6
90 PRINT#1,"H1LEJ";
100 SYS(826)

        Here goes the foreground program, while
        the GPIB is being serviced in the background

Use SYS(839) to suspend the background process
Use SYS(826) to resume the background process

The buffer pointer is found from the foreground with:
PO=PEEK(2)*256+PEEK(995)
```

Listing 2. BASIC program.

DISCOUNT PRINTER RIBBONS

40% OFF!! OR MORE!

Brand New, Top Quality, Exact Replacement Ribbons & Cartridges. These Ribbons Produce **Super Jet** Black Impressions and Ultra Reliable Print Life. They Are Delivered to Your Door Promptly for Much Less Than Most Retail Stores

★SPECIAL! BUY 10 and GET ONE FREE!

YOUR PRINTER	PACK SIZE	RETAIL LIST**	YOUR WHOLESALE PRICE		SIZE	COMMENTS	CAT. ORDER #
RADIO SHACK LPIII, LPV	one/pk	13.95/cart	8.95/Reload rib. only	*(8.95 ea)*	.500" x 45'	Nylon Incl Instr	R-T3
RADIO SHACK LPII, LPIV	3/pk	18.95/3 pk	11.95/3 pk	*(3.98 ea)*	.563" x 45'	Nylon Jet Blk	C-700
CENTRONICS. MODS 700 to 703	3/pk	18.95/3 pk	11.95/3 pk	*(3.98 ea)*	.563" x 45'	Nylon Jet Blk	C-700
CENTRONICS 100, 101A, 102, 103, 300, 301, 306, 308, 330, 358, 398, 500, 501, 503, 508, 588, 820, 820.	3/pk	26.33/3 pk	17.55/3 pk	*(5.85 ea)*	1" x 108'	Nylon Jet Blk 5 mil High Speed	C-100
CENTRONICS 704-705	1/pk	16.95 ea	13.95/Giant Cart	*(13.95 ea)*	5/16" x 210'	Giant Cart	C-7045
IBM -"SILVER DOLLAR" Sys. 34, Sys. 32 MDLA, Series IMDL4974, 5256, 3287, 3770, 3771-3774, 4974, 5100, 5103, 5110, 5228, 5256, 5320MDLA	5/pk	5.80 ea	14.90/5 pk	*(2.98 ea)*	9/16" x 30'	Nylon Jet Blk	R-300
IBM - HARMONICA ½". SERIES I. MOD 4973/II, 3200, 3289, MOD 2.	3/pk	9.42 ea	20.85/3 pk	*(6.95 ea)*	1/2" x 108'	Nylon Jet Blk	C-350
TELETYPE MOD 33, 28, 35, 37, 38, 88.	10/pk	2.40 ea	13.90/10 pk	*(1.39 ea)*	1/2" x 36'	Nylon Jet Blk	R-450
DIABLO HYTYPE II (M/S BLK) HI YIELD. FITS 70 PRINTERS!	1/pk	9.31 ea	6.87 ea	*(6.87 ea)*	5/16" x "High Yield"	300,000 plus imp.	C-511
OUME (FITS 80 PRINTER MODS)	3/pk	18.00/3 pk	13.95/3 pk	*(4.65 ea)*	1/4" x 310'	Multistrike Film	C-525
WANG M/S. 5541W, WC, 5581, WD, 6581W, 2281W	1/pk	6.85 ea	5.95 ea	*(5.95 ea)*	5/16" x 393'	Multistrike Film	C-550
DEC ½ x 40YD.	3/pk	17.77/3 pk	12.95/3 pk	*(4.32 ea)*	1/2" x 120'	Double Spools	R-600
DEC ½ x 60YD.	3/pk	20.12/3 pk	14.25/3 pk	*(4.75 ea)*	1/2" x 180'	Double Spools	R-644
NEC SPINWRITER	4/pk	23.40/3 cart	23.60/4 pk rb. reload	*(5.90 ea)*	1/2" x 51'	Nylon/Ex Lng Life	R-400



TERMS:

MINIMUM PURCHASE - **$20**
PAYMENT BY: C.O.D. (UPS), CHECK, MASTER CARD, OR VISA CHARGE CARD.
VOLUME DISCOUNTS:
20 - 50 PACKS **10%**
51 - 100 PACKS **15%**
***UNDER $20, ADD $5 HANDLING.**
****APPROX. RETAIL. PRICE VARIES.**

ANCIE LABORATORIES ↙187
9204 Baltimore Blvd
College Park, MD 20740
301-345-6000 (Wash D.C Local)
301-792-2060 (Balto. MD Local)
800-638-0987 (National)

NAME_____
ADDRESS_____
CITY_____ STATE_____ ZIP_____

ANCIE Laboratories
9204 Baltimore Blvd.
College Park, MD 20740
301-345-6000 (Wash. D.C. Local)
301-792-2060 (Balto. MD Local)
800-638-0987 (National)

QTY	CAT #	AMT.
	TOTAL	

☐ Check Enclosed
☐ C.O.D.
☐ VISA
☐ MASTER CHARGE
ACCT. #_____
EXP. DATE_____
MIN. ORDER $20
PRICES SUBJECT TO CHANGE

fer and then jump to $F0F1 to send it. This is very easy to use, but as you do not have access to the accumulator from BASIC, you can only use this entry point from machine language. If you want to do it from BASIC, use the procedure that Yob explained in the text.

After sending a couple of characters from the command sequence, I update the pointers and check for page boundaries and buffer full, and finally recover the original Y index from the stack, reenable interrupts from retrace and then jump to continue the processing of the retrace interrupt.

This process fills the memory buffer in the background, and the program in Listing 2 uses this buffer for the calculations done in the foreground. If the device is very slow, you will notice some delay in the foreground program, but with the HP47310A you will not notice much difference and the timer function will work correctly.

The listing of the BASIC program (Listing 2) is self-explanatory. It reserves some memory for the buffer and then loads the machine-language program from data statements (not included) into the second cassette buffer. The file is open to the A/D converter and the first instruction string is sent to reset the converter, select the channel and pacing rate and enable the pacer and the SRQ of the converter.

A semicolon is used to inhibit the unlisten at the end, because unlisten would inhibit the SRQ of the converter. The PET has the CMD command to inhibit the unlisten at the end and thus leave the device connected to the bus. However, the CMD would redirect all output to the GPIB, and this is not what the A/D converter wants, so I use the semicolon.

Conclusion

This gives you an idea of how easy it is to use the GPIB from machine language in the PET, and a way to implement the SRQ function of the GPIB. Now I would like to see someone combine this with Yob's description of how to implement new functions in the PET, and implement an LPRINT function using spooling so the printer would work in parallel (not serial) with the BASIC program. ■

Telecommunications



Micro Link sets you up with computers and terminals by telephone. Send, receive all files; save it all on disk. Features word-wrapped display and simple, fast commands. Use with friends, office, data banks. Hosts other end, not required there. Send files by character, line or block protocol. Orig./answer; any baud. For 8080 or Z-80 with modem. MDOS or CP/M 1.4 and up. On 5¼" 16-sector or 8" disk. $89

Wordcraft ✓45
c/o Microcomputer Software Associates
1122 B St., Hayward
Calif. 94541. Or call
Wordcraft (415) 534-2212

SAVE more than 50%



FOB Reston Virginia
MasterCard, VISA
Check, MO. PO.

NEW! $1995 RO version only
USED in excellent condition **RO $995; KSR $1495**

Rugged and well-constructed; available in **KSR** and **RO** versions; feature 96 ASCII (upper & lower case) **plus** 27 graphics characters in a 5X7 (optionally 5X9) dot matrix. Prints bidirectionally (logic seeking) at 180 char/sec on std pin feed paper (up to SIX part) in **red and black.** Tractors are adjustable from 3 to 15 inches; split platen versions also available. Electronic top of form/forms length control and six selectable character print densities (10, 12, and 17 cpi plus elongated in each). 1K buffer and 110-9600 Baud RS-232C interface is standard; additional buffer may be added and a Centronics-compatible parallel interface is available. Free-standing pedestal unit.

DSE ✓61 **Digital Systems Engineering**
12503 King's Lake Drive, Reston VA 22091 (703) 620-2994

ALSO AVAILABLE: New Centronics and Integral Data Systems printers at 15-20% below list; also, used printers of several makes. **Call for information!**

DISCOUNT

Stock Computer Paper & Labels
Over 50 Items in Stock

ITEMS IN STOCK	Custom To Your Needs
Stock Forms Blank or Green Bar	Invoices
Statements	Shippers
Index Cards	Custom Checks
Pressure sensitive labels all sizes	Custom Continuous Envelopes
Continuous #10 envelopes	& Letter Heads
Continuous Blank Letter Heads	Statements
Spacing charts & layout sheets	
Forms rulers	*Quantities Of 1000 Or More*

Send Inquiries To:
WHITE RIVER PRODUCTS ✓284
P.O. BOX 604
MT. CLEMENS, MICHIGAN 48043

Name_____
Street_____ Phone_____
State_____ Zip_____
Type of Equipment_____

FREE SEND FOR YOURS TODAY ☐ Computer Package ☐ 81 Tax Guide ☐ Stock Price List

✓See List of Advertisers on page 194

CLASSIFIEDS

Classified advertisements are intended for use by persons desiring to buy, sell or trade used computer equipment. No commercial ads are accepted.

Two sizes of ads are available. The $5 box allows up to 5 lines of about 35 characters per line, including spaces and punctuation. The $10 box allows up to 10 lines. Minimize use of capital letters to save space. No special layouts allowed. Payment is required in advance with ad copy. We cannot bill or accept credit.

Advertising text and payment must reach us 60 days in advance of publication (i.e., copy for March issue, mailed in February, must be here by Jan. 1). The publisher reserves the right to refuse questionable or inapplicable advertisements. Mail copy with payment to: **Classifieds, Kilobaud Microcomputing, Peterborough NH 03458.** Do not include any other material with your ad as it may be delayed.

Hardly-used Hayes Micromodem for Apple. Like new! Only $285. Still has unused warranty card! Also Centronics 737, like new, only $700. For $85 more you can have the Apple interface & cable. Howard Rothman, 218 Huntington Road, Bridgeport, CT 06608. 203-333-6436.

TRS-80 Model 1, 32K, E/I, disk, MicroDOS, data separator, also LNW expansion 80% complete. $1150. 10% down, bal. UPS COD. D. Bassetti, 730 Ave. Z, Brooklyn, NY 11223.

Digital Group computer. Factory wired, less than 5 hrs. running time. Z-80A processor, 32K static RAM, keyboard, dual Phideck (early board). Complete documentation, showroom condition. $700 obo, F.O.B. Los Angeles. J. Zubrecky, 328-A Russell Ave., Monterey Park, CA 91754. 213-571-1554.

For Sale: Memory, Godbout Econoram II for S-100 3-8K boards. Sacrifice, $75 each. Documentation on Radio Shack expansion interface (26-2001) and Model I (26-2103); both for $10. T-Bug, $9. Call Mike 901-795-5122.

SD sales Z-80 starter assembled; tested by SD, PIO chip added, extra 1K memory. One amp power supply, hardly used. Will ship UPS collect $200. T. Ramsey, 143 Devon Rd., Albertson, NY 11507.

IBM/ESCON Selectric typewriter (correcting, w/legal keyboard) both 8 months old. Factory installed RS232C interface w/backspace and tab. In new condition, just too slow for my purpose. $1600. J. Turner, 309 Mac Corkle Ave., Saint Albans, WV 25177. 304-776-3675.

For Sale: 32K Exidy Sorcerer, BASIC and assembler ROMPACs & extended cassette BASIC, RS-232, parallel, dual cassette control. All documentation plus internal H/W and S/W manuals. Over $450 worth of S/W (graphics, games, word processing, database, utilities, etc.) All in exc. cond. for $1250 or best offer. With Comprint printer add $500. With 12" monitor add $75. R. L. Henne, 5870 Wood Flower, Burke, VA 22015. 703-250-5323.

9" Conrac video monitor, 10 MHz with new P39 green phosphor CRT, OEM style without enclosure with schematics & doc's. Minor mod's needed, instructions provided—$65. Heathkit H-8, 16K static memory bd #WH-8-16—$195, B.O. Also Fairchild "F8" microprocessor evaluation board, 1K memory, 1K ROM monitor, serial I/O port, assm—$75. Five-slot motherboard & (2) 4K static memory bds less 2102-1 memory—$100 or $150 for all F8 CPU, mother & memory bds & complete doc's. Paul Ramos, 617-935-3758 aft 6 PM & wkends.

For Sale: Telesis Labs Microport 8. The Microport 8 is an 8 digit, self-contained display (displays 0–f). Excellent condition. New price is $109. The first money order for $90 takes it. For spec sheet, send SASE to: John Schork, Box 67, Ridge Road, Lebanon, NJ 08833.

Wanted: Copies of Jan. '78 *Kilobaud*, issue #13 and Dec. '78 *Kilobaud*, issue #24. Must be in good condition. Send particulars and prices to: Phil Meria, c/o Johnson Controls, Inc., 3007 Malmo Dr., Arlington Heights, IL 60005.

Axiom printer, Model EX801P (parallel). Great, trouble-free printers; new, in original boxes, my project cancelled. $425 each, or all four (4) $1600. J. Turner, 309 Mac Corkle Ave., St. Albans, WV 25177. 304-776-3675.

New original package, LOBOS 8" dual-drive cabinet & P.P. Technico, TI9900, 16-bit CPU system, perf. oper. cond. 64K RAM, disk controller bd. DOS, 3.0 Super BASIC + EAL, full document., & schematics. All $3500/best offer. Sam White, 643 Indiana Ave., Venice, CA 90291. 213-549-2500/396-0936.

For Sale: Complete LSI-11 computer system including DEC VT-103AA terminal, LSI-11/3 96Kb memory, 2 serial ports, 1 megabyte floppy-disk dual-drive DEC RX02, 100 hours use, fully functioning system, software included. List price $20,178, now yours for only $8600. H. Cooper 801-766-1071.

For Sale: *Kilobaud* #1 thru August 1978, 20 issues, $50 or best offer. Extra *Kilobauds* #1 thru #5 best offer. *Byte* #1 thru August 1979, 48 issues, $100 or best offer. Extra *Bytes* #1 thru #4, best offer. HP-524D counter, 525C 100–500 MHz, 525A 10–100 MHz, 526A video amplifier, 526C period multiplier plug-ins, manuals, used as lab standard. Best reasonable offer. Clive Frazier, 5325 Curry Ford #A203, Orlando, FL 32806.

IBM 3275 Model II display terminal with keyboard, documentation. Excellent condition. $1200. B. Pelkey 305-862-0875.

For Sale: 8 Godbout 8K Econoram II $43 each postpaid. Hazeltine 2000 CRT $500 FOB. Compucolor 8001, 19" CRT, 8 colors, 192×160 resolution, large keyboard with numeric pad, cursor control, BASIC, $1200 FOB. Make offer. D. G. Kissinger, School of Health, Loma Linda Univ., Loma Linda, CA 92350. 714-796-7272.

Wanted: Daily stock prices on PET cassettes. One cassette per issue. Hi, lo, close, vol, date. 1960 to present. Don Nyre, 305 La Jolla Drive, Newport Beach, CA 92663.

Elf II. 8K, giant board, bare 4K board, kludge, ps, ASCII keyboard, Tiny BASIC, elf bug, all Questdata, courses, games, etc. Cleaning house. $175. Lapham, 741 N200, Seattle, WA 98133.

Kilobaud: 1st 3 years, complete, like new. By vol. only; '77–$35, '78–$35, '79–$40; $100 or best offer takes all. R. Rose, 2205 Grayson Pl., Falls Church, VA 22043.

For Sale: Netronics Elf II, 4K giant board, video board, Tiny BASIC, all manuals. All for $290. F. E. Ferris, 120 Williams Terrace, Warner Robins, GA 31093. 912-923-4492.

For Sale: Complete system. 1MSAI 8080 computer with 64K memory, Lear Siegler ADM-3 terminal, and Altair disk drive. Good condition. Best offer. Jim Fritz, 1413 Harmony Lane, Annapolis, MD 21401. 301-757-7019.

MICRO QUIZ

(from page 26)

Answer: 10

I	Z
—	−1
2	−3*1/−1=3
3	−5*3/3=−5
4	−7*5/−5=7
.	.
.	.
.	.
10	−19*17/−17=19

Sum of Z's is (3−1)+(7−5)+ . . . +(19−17).

APPLE TRS-80 IBM WANG ALTAIR

MAXELL® OR Dysan CORPORATION

Some computerists pay less - but may not receive Shuggart® or IBM® approved disks.

8" SINGLE SIDE DOUBLE DENSITY.....Box of **10** for **$60**
8" DOUBLE SIDE DOUBLE DENSITY.....Box of **10** for **$70**
5¼" MINI.....Box of **10** for **$50**

DYSAN® DISKS
5¼" MINI.....Box of **5** for **$25**
(Specify - 8" Soft or Hard Sector/5" Soft or Hard Sector)

VISA

C.O.D. - $1.00 Additional

Custom Electronics Inc.
238 EXCHANGE STREET
CHICOPEE, MA. 01013
413 · 592 · 4761 ✓141
established 1960 · closed mondays

ATARI TI/99·4 PET

DATA-GENERAL MATTEL CROMENCO

OSI 48 PIN BUSS COMPATIBLE

96 PROTOTYPE BOARD $33 Holds 96 14 or 16 pin IC's. Also accommodates 18, 24 or 40 pin IC's
BP-580 BACKPLANE $43 Assembled 8-slot backplane with Molex connectors and resistors
MEM-CM9 24K memory card with floppy disk controller and OSI-type real time clock. Memory uses 2114 type chips. Floppy controller supports 5¼" or 8" drives with separated clock and data outputs
BMEM-CM9 $50 Bare card, Manual & Molex connectors
8MEM-CM9 $210 8K 2114 300ns low power chips. Assembled and Tested, socketed for 24K of memory
16MEM-CM9 $300 16K 2114-300ns, A&T, sockets 24K.
24MEM-CM9 $380 24K Assembled and tested
MEM $55 16 (8K) 2114 300-ns low power chips
FL-470 $180 Assembled and tested floppy disk controller & OSI type Real Time Clock. Expandable to 24K of memory
MEM-8 $21 8K Bare card, Manual, uses 2102 chips
IO-1600 Super I/O Card. Supports 8K of 2114 memory, 2 16 Bit Parallel Ports, 5 RS-232 Serial Ports with CTS & RTS handshaking & proto area
BIO-1600 $50 Bare card, Manual & Molex connectors
IO-CA-6A $125 ACIA Serial Printer Port
IO-CA-9D $175 Diablo Parallel Printer Port
IO-CA10X $125 1-4 RS-232 Serial Ports
IO-Level 3 $425 4K Memory, 4 RS-232 Multi-terminal Ports, 1 Serial Printer, 1 Centronics Printer & 1 Diablo Printer Port
PW-5-6 $29 POWER ONE Brand Supply 5V at 6 amps with overvoltage protection Reg. $49.95

✓293

D&N MICRO PRODUCTS, INC.
New Location — New Location
3684 N. Wells Street
Ft. Wayne, Indiana 46808
219/485-6414

TERMS: Check or money order. Add $2 shipping and handling. Indiana residents add 4% sales tax.
DEALER INQUIRIES INVITED

H-8/H-89

DIGITALKER

QUALITY VOICE with INFLECTION
FUN TO USE --- EASY TO PROGRAM
INTERFACE TO H8 BUSS OR PARALLEL BOARD
APPLICATIONS: TELECOMMUNICATION, TEACHING AIDS, TALKING CLOCK, LANGUAGE TRANSLATION, GAMES, AND MORE.
INCLUDES DEMONSTRATION "Basic" PROGRAM

$149.95

add $2.50 shipping and insurance

MI-8 ✓190
822 E. County Rd. 30
Ft. Collins, Colo. 80525

For complete Digitalker description, see "Ciarcia's Circuit Cellar" in the June issue of "Byte" magazine.
TO ORDER BY PHONE (303) 669-4116

DEALER DIRECTORY

El Monte, CA

Ohio Scientific specialist in the San Gabriel Valley serving greater Los Angeles. Full product line on display. Specializing in business computers. In-house service. Custom programming. Terminals. Printers. Open Mon–Sat, 9 AM–7 PM. **Computer & Video, 3380 Flair Dr., Suite 207, El Monte, CA 91731, 572-7292.**

San Jose, CA

New and used computer products—specializing in S-100 boards, printers, drives, chassis and complete systems, as well as supplies and parts—Imsai, Tandon, Diablo—5000 sq. ft. **W/W Component Supply, Inc., 1771 Junction Ave., San Jose, CA 95112.**

Sarasota, FL

Your personal and business computer store for Dynabyte, Vector, HP-85, Atari and Epson. Structured Systems and Micro-Pro software. Computer furniture and books by Osborne or Hayden. Sales, service and supplies. **Computer Crossroads, 3800 S. Tamiami Trail, Sarasota, FL 33579, 349-0200.**

Tampa, FL

Apple Computer sales and service. S-100 boards from SSM, Godbout, Thinker Toys, California Computer Systems. Computer books and magazines. **AMF Microcomputer Center, Inc., 11158 N. 30th Street, Tampa, FL 33612, 971-4072, 977-0708.**

Aurora, IL

Microcomputer systems for home or business; peripherals, software, books & magazines. Apple, Hewlett-Packard Series 80 Systems, HP Calculators, IDS, Qume, Starwriter printers. **Farnsworth Computer Center, 1891 N. Farnsworth Ave., Aurora, IL 60505, 851-3888.**

Chicago, IL

Computer Hardware/Specialists for home and business. Largest selection of computer books, magazines and copyrighted software in Illinois. Experienced factory-trained service department. Feature Apple, Alpha Microsystems and Hewlett-Packard calculators and accessories. **Data Domain of Schaumburg, 1612 E. Algonquin Rd., Schaumburg, IL 60195, 397-8700.**

Chicago, IL

Brand new lowest prices, never undersold, postpaid in USA—Teletype 43 keyboard printers, Okidata & Integral Data printers, SS-50 bus computers, peripherals & business software. **Data Mart, 914 East Waverly Street, Arlington Heights, IL 60004, 398-8525.**

Herington, KS

Hardware support. Maintenance and service for all microcomputers and peripherals. Kits assembled or debugged. Radio Shack (mods OK) repaired. Quality work, fast turnaround and reasonable cost. **Prairie Micro Clinic, Box 325, Herington, KS 67449, 258-2179.**

Garden City, MI

Books, magazines, hardware and software for Apple, North Star, TRS-80 and PET. **Computer Center, 28251 Ford Rd., Garden City, MI 48135, 425-2470.**

Hannibal, MO

Ohio Scientific products, modifications, service, software. 8" disk for C1P, C4P. Process control specialist. **E&I Technical Service, 5300 Paris Gravel Road, Hannibal, MO 63401, 248-0084.**

River Edge, NJ

Discount software—up to 25% off business, utility, recreational, educational and home programs. Apple, Atari, TRS-80 and PET. Atari computers always on sale. **Software City, 111 Grand Ave., River Edge, NJ 07661.**

Chautauqua, NY

Retail book store featuring the Disassembled Handbook for TRS-80 Volumes 1, 2, 3. English, German & French language editions. 9 AM–5 PM weekdays. Come and visit us. **Richcraft Computer Book Store, 1 Wahmeda Ave., Chautauqua, NY 14722, 753-2654.**

Portland, OR

Ohio Scientific specialists for business and personal computers. Local service. Terminals, printers, custom programming. Full OSI product line on display! 10 AM to 6 PM M–F. **Fial Computer, 11266 SE 21st Ave., Milwaukie, OR 97222, 654-9574.**

Spokane, WA

SS-50 Users: Expand present system to maximum or build from ground up. We provide PCBs for motherboards, interfaces, etc. Write for specs and information. **Quality Research Company, PO Box 7207, Spokane, WA 99207.**

Milwaukee, WI

Specializing in the CBM-PET business, personal, educational, industrial, telecomputing systems. Consulting, modems, printers, books, accessories, magazines, supplies, peripherals. Factory authorized service. Convenient freeway access. **PETTED Micro Systems, 4265 W. Loomis Rd., Milwaukee, WI 53221, 282-4181.**

Dealers: Listings are **$15** per month in prepaid quarterly payments, or one yearly payment of **$150**, also prepaid. Ads include 25 words describing your products and services plus your company name, address and phone. (No area codes or merchandise prices, please.) Call Marcia at 603-924-7138 or write *Kilobaud Microcomputing*, Ad Department, Peterborough, NH 03458.

TAR HEEL SOFTWARE SYSTEMS

"Affordable Software for Small Business"

PROUDLY ANNOUNCES

REAL ESTATE BOOKKEEPING SYSTEM

a disk-based fully-integrated system including cash journal, general journal, tenant ledger, landlord ledger, monthly landlord statements, balance sheet, P & L statement by profit centers, and more, all for $150 postpaid. (North Carolina orders add 4% sales tax.) Free continuing update service included. Minimum hardware: TRS-80 Model I, 32K, 2 disk drives, line printer. Versions for TRS-80 Model Ii and III, Apple II and Commodore 2001 Series coming soon. Watch for announcement of other small business applications software in the months to come.

THSS ✓233

TAR HEEL SOFTWARE SYSTEMS, INC.

536 S. LEXINGTON AVE. · P.O. BOX 340
BURLINGTON, NORTH CAROLINA 27215




NOTICE

To all resellers, dealer, OEMs and software vendors. We market Siemens Disk Drives and offer a line of single, double and four drive enclosures for 5'' and 8'' drives. Our four drive case will accomodate two drives and a card cage or mother board. We also have an ''all in one'' video with drives for your boards or ours.

CORSAIR COMPUTER CORPORATION ✓346
5812 Curzon Ave.
Fort Worth, TX 76107
817-731-3792

A SHIRT-POCKET GUIDE

NEW!



This handy, slim, 44-page reference contains a synopsis of each instruction available for the popular 6502 CPU. Mnemonics and machine codes in hexadecimal format are provided for each addressing mode. Appendices list the instruction set alphabetically by assembler mnemonics as well as numerically by machine code. A hexadecimal to decimal conversion chart is included. Additional information of value to programmers and designers is provided, including a chip pin-out diagram, basic timing information and diagrams of the basic chip architecture.

The 6502 INSTRUCTION HANDBOOK fits comfortably in a shirt or hip pocket. It serves as a convenient reference for programmers, technicians and engineers. The guide may be obtained by mail for just $2.00 postpaid in the United States. Order from SCELBI PUBLICATIONS, 20 Hurlbut Street, Elmwood, CT 06110

✓146

ORDER OUR PRODUCT NO. 101

JUST $2.00 POSTPAID IN U.S.

NAME (please print all information)


STREET ADDRESS


CITY STATE ZIP

✓See List of Advertisers on page 194

kb microcomputing book nook

—PROGRAMMING & COOKBOOKS—

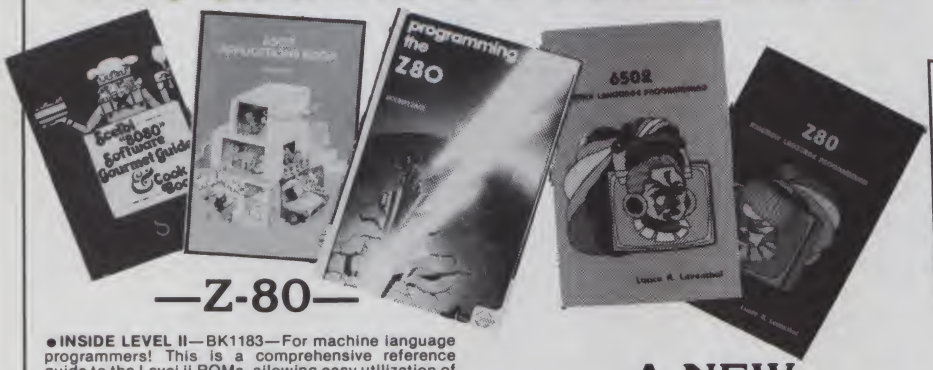

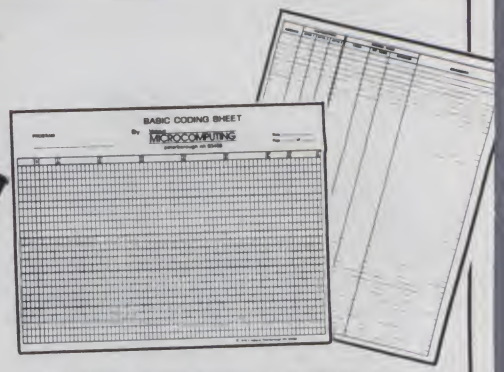

—Z-80—

● **INSIDE LEVEL II**—BK1183—For machine language programmers! This is a comprehensive reference guide to the Level II ROMs, allowing easy utilization of the sophisticated routines they contain. It concisely explains set-ups, calling sequences, variable passage and I/O routines. Part II presents an entirely new composite program structure which unloads under the SYSTEM command and executes in both BASIC and machine code with the speed and efficiency of a compiler. Special consideration is given to disk systems. $15.95.*

● **PROGRAMMING THE Z-80**—BK1122—by Rodnay Zaks. Here is assembly language programming for the Z-80 presented as a progressive, step-by-step course. This book is both an educational text *and* a self-contained reference book, useful to both the beginning and the experienced programmer who wish to learn about the Z-80. Exercises to test the reader are included. $14.95.*

● **Z-80 SOFTWARE GOURMET GUIDE AND COOKBOOK**—BK1045—by Nat Wadsworth. Scelbi's newest cookbook! This book contains a complete description of the powerful Z-80 instruction set and a wide variety of programming information. Use the author's ingredients including routines, subroutines and short programs, choose a time-tested recipe and start cooking! $16.99.*

● **Z-80 ASSEMBLY LANGUAGE PROGRAMMING**—BK1177—by Lance A. Leventhal. This book thoroughly covers the Z-80 instruction set, abounding in simple programming examples which illustrate software development concepts and actual assembly language usage. Features include Z-80 I/O devices and interfacing methods, assembler conventions, and comparisons with 8080A/8085 instruction sets and interrupt structure. $16.99.*

TEST EQUIPMENT —LIBRARY—

● **VOL. I COMPONENT TESTERS**—LB7359—. . . how to build transistor testers (8), diode testers (3), IC testers (3), voltmeters and VTVMs (9), ohmmeters (8 different kinds), inductance (3), capacity (9), Q measurement, crystal checking (6), temperature (2), aural meters for the blind (3) and all sorts of miscellaneous data on meters. . . using them, making them more versatile, making standards. Invaluable book. $4.95.*

● **VOL. II AUDIO FREQUENCY TESTERS**—LB7360—. . . jam packed with all kinds of audio frequency test equipment. If you're into SSB, RTTY, SSTV, etc., this book is a must for you. . . a good book for hi-fi addicts and experimenters, too! $4.95.*

● **VOL. III RADIO FREQUENCY TESTERS**—LB7361—Radio frequency waves, the common denominator of Amateur Radio. Such items as SWR, antenna impedance, line impedance, rf output and field strength; detailed instructions on testing these items includes sections on signal generators, crystal calibrators, grid dip oscillators, noise generators, dummy loads and much more. $4.95.*

● **VOL. IV IC TEST EQUIPMENT**—LB7362—Become a troubleshooting wizard! In this fourth volume of the 73 TEST EQUIPMENT LIBRARY are 42 home construction projects for building test equipment to work with your ham station and in servicing digital equipment. Plus a cumulative index for all four volumes for the 73 TEST EQUIPMENT LIBRARY. $4.95.*

A NEW PROGRAMMING —SERIES—

The Microprocessor Software Engineering Series by John Zarrella provides common sense descriptions of advanced computer system topics for engineers, programmers and development managers. Each volume is a self-contained review of a software engineering topic, explaining fundamental concepts in easy-to-understand language and describing sophisticated software tools and techniques. Detailed glossary of technical jargon is included in each volume. This series will help you find the solutions to your software problems.

● **OPERATING SYSTEMS: CONCEPTS AND PRINCIPLES**—BK1193—Presents an overview of the basic operating system types, their components and capabilities. $7.95.*

● **WORD PROCESSING AND TEXT EDITING**—BK1194—Provides a firm basis for understanding word processing terminology and for comparing systems. $7.95.*

● **SYSTEM ARCHITECTURE**—BK1195—Presents a detailed overview of advanced computer system design including object architecture and capability-based addressing. $9.95.*

—6502—

● **PROGRAMMING THE 6502 (Third Edition)**—BK1005—Rodnay Zaks has designed a self-contained text to learn programming, using the 6502. It can be used by a person who has never programmed before, and should be of value to anyone using the 6502. The many exercises will allow you to test yourself and practice the concepts presented. $12.95.*

● **6502 APPLICATIONS BOOK**—BK1006—Rodnay Zaks presents practical-application techniques for the 6502 microprocessor, assuming an elementary knowledge of microprocessor programming. You will build and design your own domestic-use systems and peripherals. Self-test exercises included. $12.95.*

● **6502 ASSEMBLY LANGUAGE PROGRAMMING**—BK1176—by Lance A. Leventhal. This book provides comprehensive coverage of the 6502 microprocessor assembly language. Leventhal covers over 80 programming examples from simple memory load loops to complete design projects. Features include 6502 assembler conventions, input/output devices and interfacing methods, and programming the 6502 interrupt system. $16.99.*

● **6502 SOFTWARE GOURMET GUIDE AND COOKBOOK**—BK1055—by Robert Findley. This book introduces the BASIC language programmer into the realm of machine-language programming. The description of the 6502 structure and instruction set, various routines, subroutines and programs are the ingredients in this cookbook. "Recipes" are included to help you put together exactly the programs to suit your taste. $12.95.*

● ***MICROCOMPUTING* CODING SHEETS** *Microcomputing*'s dozen or so programmers wouldn't try to work without these handy scratch pads, which help prevent the little errors that can cost hours and hours of programming time. Available for programming in Assembly/Machine Language (PD1001), which has columns for address, instruction (3 bytes), source code (label, op code, operand) and comments; and for BASIC (PD1002) which is 72 columns wide. 50 sheets to a pad. $2.39.*

—8080/8080A—6800—

● **8080A/8085 ASSEMBLY LANGUAGE PROGRAMMING**—by Lance Leventhal—BK1004—Assembly language programming for the 8080A/8085 is explained with a description of the functions of assemblers and assembly instructions, and a discussion of basic software development concepts. Many fully debugged, practical programs are included as is a special section on structured programming. $15.99.*

● **8080 PROGRAMMING FOR LOGIC DESIGN**—BK1078—Ideal reference for an in-depth understanding of the 8080 processor. Application-oriented and the 8080 is discussed in light of replacing conventional, hard-wired logic. Practical design considerations are provided for the implementation of an 8080-based control system. $9.50.*

● **8080 SOFTWARE GOURMET GUIDE AND COOKBOOK**—BK1102—If you have been spending too much time developing simple routines for your 8080, try this new book by Scelbi Computing and Robert Findley. Describes sorting, searching, and many other routines for the 8080 user. $12.95.*

● **6800 PROGRAMMING FOR LOGIC DESIGN**—BK1077—Oriented toward the industrial user, this book describes the process by which conventional logic can be replaced by a 6800 microprocessor. Provides practical information that allows an experimenter to design a complete micro control system from the "ground up." $9.50.*

● **6800 SOFTWARE GOURMET GUIDE AND COOKBOOK**—BK1075—Like its culinary cousin, *The 8080 Gourmet Guide*, this book by Scelbi Computing and Robert Findley describes sorting, searching and other routines—this time for the 6800 user. $12.95.*

—COOKBOOKS—

● **CMOS COOKBOOK**—BK1011—by Don Lancaster. Details the application of CMOS, the low power logic family suitable for most applications presently dominated by TTL. Required reading for every serious digital experimenter! $10.50.*

● **TVT COOKBOOK**—BK1064—by Don Lancaster. Describes the use of a standard television receiver as a microprocessor CRT terminal. Explains and describes character generation, cursor control and interface information in typical, easy-to-understand Lancaster style. $9.95.*

● **TTL COOKBOOK**—BK1063—by Don Lancaster. Explains what TTL is, how it works, and how to use it. Discusses practical applications, such as a digital counter and display system, events counter, electronic stopwatch, digital voltmeter and *a digital tachometer.* $9.50.*

*Use the order card in the back of this magazine or itemize your order on a separate piece of paper and mail to Kilobaud *Microcomputing* Book Department • Peterborough NH 03458. Be sure to include check or detailed credit card information.

No C.O.D. orders accepted. All orders add $1.00 handling. Please allow 4-6 weeks for delivery. Questions regarding your order? Please write to Customer Service at the above address.

PRICES SUBJECT TO CHANGE WITHOUT NOTICE

FOR TOLL FREE ORDERING CALL 1-800-258-5473

kb microcomputing book nook

—BASIC & PASCAL—



new

● 50 BASIC EXERCISES—BK1192—by J. P. Lamoitier. This book is structured around the idea that the best way to learn a language is through actual practice. It contains 50 completely explained exercises: statement and analysis of the problem, flowcharts, programs and actual runs. Program subjects include mathematics, business, games, and operations research, and are presented in varying levels of difficulty. This format enables anyone to learn BASIC rapidly, checking their progress at each step. $12.95*

● THE BASIC HANDBOOK—BK1174—by David Lien. This book is unique. It is a virtual ENCYCLOPEDIA of BASIC. While not favoring one computer over another, it explains over 250 BASIC words, how to use them and alternate strategies. If a computer does not possess the capabilities of a needed or specified word, there are often ways to accomplish the same function by using another word or combination of words. That's where the HANDBOOK comes in. It helps you get the most from your computer, be it a "bottom-of-the-line" micro or an oversized monster. $14.95.*

● LEARNING LEVEL II—BK1175—by David Lien. Written especially for the TRS-80, this book concentrates on Level II BASIC, exploring every important BASIC language capability. Updates are included for those who have studied the Level I User's Manual. Sections include: how to use the Editor, dual cassette operation, printers and peripheral devices, and the conversion of Level I programs to Level II. $15.95.*

● BASIC BASIC (2ND EDITION)—BK1026—by James S. Coan. This is a textbook which incorporates the learning of computer programming using the BASIC *language with* the teaching of mathematics. Over 100 sample programs illustrate the techniques of the BASIC language and every section is followed by practical problems. This second edition covers character string handling and the use of data files. $10.50.*

● ADVANCED BASIC—BK1000—Applications, including strings and files, coordinate geometry, area, sequences and series, simulation, graphing and games. $10.75*.

● SIXTY CHALLENGING PROBLEMS WITH BASIC SOLUTIONS (2nd Edition)—BK1073—by Donald Spencer, provides the serious student of BASIC programming with interesting problems and solutions. No knowledge of math above algebra required. Includes a number of game programs, as well as programs for financial interest, conversions and numeric manipulations. $6.95.*


● PROGRAMMING IN PASCAL—BK1140—by Peter Grogono. The computer programming language PASCAL was the first language to embody in a coherent way the concepts of structured programming, which has been defined by Edsger Dijkstra and C.A.R. Hoare. As such, it is a landmark in the development of programming languages. PASCAL was developed by Niklaus Wirth in Zurich; it is derived from the language ALGOL 60 but is more powerful and easier to use. PASCAL is now widely accepted as a useful language that can be efficiently implemented, and as an excellent teaching tool. It does not assume knowledge of any other programming language; it is therefore suitable for an introductory course. $12.95.*

new

● PASCAL—BK1188—by Paul M. Chirlian. Professor Chirlian's textbook combines a simple approach to the PASCAL language with comprehensive coverage on how a computer works, how to use a flowchart, working from a terminal as well as batch operation and debugging. Special attention is paid to idiosyncrasies of the language and syntax flowcharts abound for the convenience of the experienced programmer. Well indexed. $12.95*

● INTRODUCTION TO PASCAL—BK1189—by Rodnay Zaks. A step-by-step introduction for anyone wanting to learn the language quickly and completely. Each concept is explained simply and in a logical order. All features of the language are presented in a clear, easy-to-understand format with exercises to test the reader at the end of each chapter. It describes both standard PASCAL and UCSD PASCAL, the most widely used dialect for small computers. No computer or programming experience is necessary. $14.95.*

—BUSINESS—

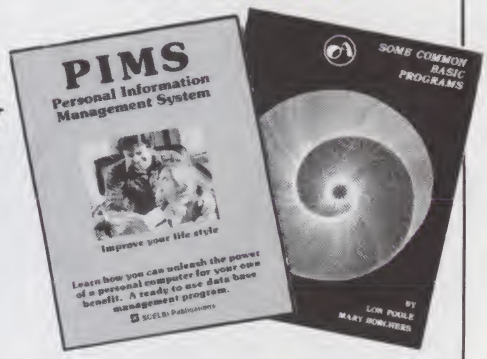

● PAYROLL WITH COST ACCOUNTING—IN BASIC—BK1001—by L. Poole & M. Borchers, includes program listings with remarks, descriptions, discussions of the principle behind each program, file layouts, and a complete user's manual with step-by-step instructions, flowcharts, and simple reports and CRT displays. Payroll and cost accounting features include separate payrolls for up to 10 companies, time-tested interactive data entry, easy correction of data entry errors, job costing (labor of distribution), check printing with full deduction and pay detail, and 16 different printed reports, including W-2 and 941 (in **CBASIC**). $20.00.*

● SOME COMMON BASIC PROGRAMS—BK1053—published by Adam Osborne & Associates, Inc. Perfect for non-technical computerists requiring ready-to-use programs. Business programs, plus miscellaneous programs. Invaluable for the user who is not an experienced programmer. All will operate in the stand-alone mode. $14.99 paperback.

● PIMS: PERSONAL INFORMATION MANAGEMENT SYSTEM—BK1009—Learn how to unleash the power of a personal computer for your own benefit in this ready-to-use data-base management program. $11.95.*

—GAMES—




● 40 COMPUTER GAMES—BK7381—Forty games in all in nine different categories. Games for large and small systems, and even a section on calculator games. Many versions of BASIC used and a wide variety of systems represented. A must for the serious computer gamesman. $7.95*

● BASIC COMPUTER GAMES—BK1074—Okay, so once you get your computer and are running in BASIC, then what? Then you need some programs in BASIC, that's what. This book has 101 games for you from very simple to real buggers. You get the games, a description of the games, the listing to put in your computer and a sample run to show you how they work. Fun. Any one game will be worth more than the price of the book for the fun you and your family will have with it. $7.50.*

● MORE BASIC COMPUTER GAMES—BK1182—edited by David H. Ahl. More fun in BASIC! 84 new games from the people who brought you *BASIC Computer Games*. Includes such favorites as Minotaur (battle the mythical beast) and Eliza (unload your troubles on the doctor at bargain rates). Complete with game description, listing and sample run. $7.50.*

—MONEYMAKING—

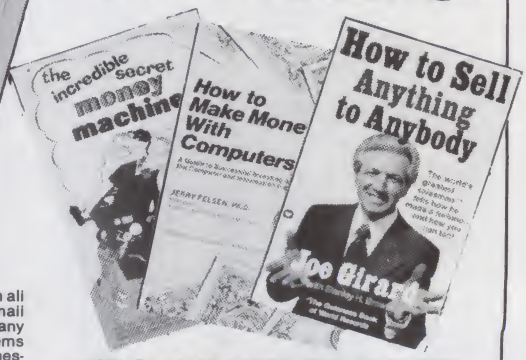

● HOW TO MAKE MONEY WITH COMPUTERS—BK1003—In 10 information-packed chapters, Jerry Felsen describes more than 30 computer-related, money-making, high profit, low capital investment opportunities. $15.00.*

● HOW TO SELL ANYTHING TO ANYBODY—BK7306—According to *The Guinness Book of World Records*, the author, Joe Girard, is "the world's greatest salesman." This book reveals how he made a fortune—and how you can, too. $2.25.*

● THE INCREDIBLE SECRET MONEY MACHINE—BK1178—by Don Lancaster. A different kind of "cookbook" from Don Lancaster. Want to slash taxes? Get free vacations? Win at investments? Make money from something that you *like* to do? You'll find this book essential to give you the key insider details of what is really involved in starting up your own money machine. $5.95.*

*Use the order card in the back of this magazine or itemize your order on a separate piece of paper and mail to Kilobaud *Microcomputing* Book Department • Peterborough NH 03458. Be sure to include check or detailed credit card information.

No C.O.D. orders accepted. All orders add $1.00 handling. Please allow 4–6 weeks for delivery. Questions regarding your order? Please write to Customer Service at the above address.

PRICES SUBJECT TO CHANGE WITHOUT NOTICE

FOR TOLL FREE ORDERING CALL 1-800-258-5473

kb microcomputing book nook

—INTRODUCTORY—



new

• UNDERSTANDING AND PROGRAMMING MICROCOMPUTERS—BK7382—A valuable addition to your computing library. This two-part text includes the best articles that have appeared in 73 and Kilobaud Microcomputing magazines on the hardware and software aspects of microcomputing. Well-known authors and well-structured text helps the reader get involved. $10.95*

• SOME OF THE BEST FROM KILOBAUD MICROCOMPUTING—BK7311—A collection of the best articles that have appeared in Kilobaud MICROCOMPUTING. Included is material on the TRS-80 and PET systems, CP/M, the 8080/8085/Z-80 chips, the ASR-33 terminal. Data base management, word processing, text editors and file structures are covered too. Programming techniques and hard-core hardware construction projects for modems, high speed cassette interfaces and TVTs are also included in this large format, 200 plus page edition. $10.95.*

• YOUR FIRST COMPUTER—BK1191—by Rodnay Zaks. Whether you are using a computer, thinking about using one or considering purchasing one, this book is indispensable. It explains what a computer system is, what it can do, how it works and how to select various components and peripheral units. It is written in everyday language and contains invaluable information for the novice and the experienced programmer. (The first edition of this book was published under the title "An Introduction to Personal and Business Computing".) $7.95*

• HOBBY COMPUTERS ARE HERE!—BK7322—If you want to come up to speed on how computers work... hardware and software...this is an excellent book. It starts with fundamentals and explains the circuits, and the basics of programming, along with a couple of TVT construction projects, ASCII-Baudot, etc. This book has the highest recommendations as a teaching aid. $4.95.*

• THE NEW HOBBY COMPUTERS—BK7340—This book takes it from where "HOBBY COMPUTERS ARE HERE!" leaves off, with chapters on Large Scale Integration, how to choose a microprocessor chip, an introduction to programming, low cost I/O for a computer, computer arithmetic, checking memory boards...and much, much more! Don't miss this tremendous value! Only $4.95.*

INTRODUCTION TO — MICROCOMPUTERS — (VOL. 0–III)


• AN INTRODUCTION TO MICROCOMPUTERS, VOL. 0—BK1130—The Beginner's Book—Written for readers who know nothing about computers—for those who have an interest in how to use computers—and for everyone else who must live with computers and should know a little about them. The first in a series of 4 volumes, this book will explain how computers work and what they can do. Computers have become an integral part of life and society. During any given day you are affected by computers, so start learning more about them with Volume 0. $7.95.*

• VOL. I—BK1030—**2nd Edition completely revised.** Dedicated to the basic concepts of microcomputers and hardware theory. The purpose of Volume I is to give you a thorough understanding of what microcomputers are. From basic concepts (which are covered in detail), Volume I builds the necessary components of a microcomputer system. This book highlights the difference between minicomputers and microcomputers. $12.99.*

• VOL. II—BK1040 (with binder)—Contains descriptions of individual microprocessors and support devices used only with the parent microprocessor. Volume II describes all available chips. $31.99*

• VOL. III—BK1133 (with binder)—Contains descriptions of all support devices that can be used with any microprocessor. $21.99*


FOR THE ELECTRONICS — HOBBYIST —

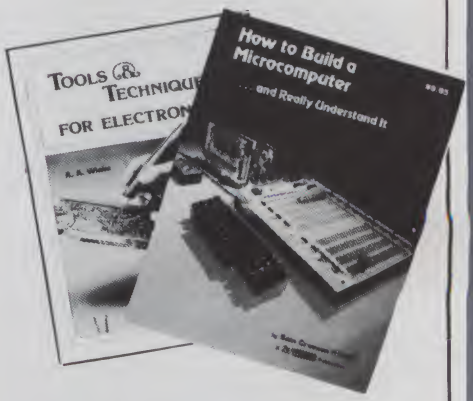

• TOOLS & TECHNIQUES FOR ELECTRONICS—BK7348—by A. A. Wicks is an easy-to-understand book written for the beginning kit builder as well as the experienced hobbyist. It has numerous pictures and descriptions of the safe and correct ways to use basic and specialized tools for electronic projects as well as specialized metal working tools and the chemical aids which are used in repair shops. $4.95.*

• HOW TO BUILD A MICROCOMPUTER—AND REALLY UNDERSTAND IT—BK7325—by Sam Creason. The electronics hobbyist who wants to build his own microcomputer system now has a practical "How-To" guidebook. This book is a combination technical manual and programming guide that takes the hobbyist step-by-step through the design, construction, testing and debugging of a complete microcomputer system. Must reading for anyone desiring a true understanding of small computer systems. $9.95.*

—SPECIAL INTERESTS—

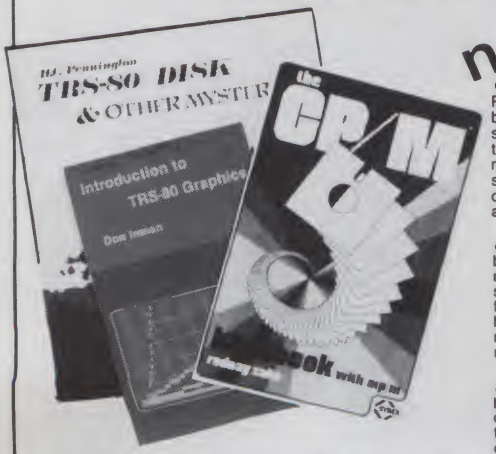

new

• THE CP/M HANDBOOK (with MP/M)—BK1187—by Rodnay Zaks. A complete guide and reference handbook for CP/M—the industry standard in operating systems. Step-by-step instruction for everything from turning on the system and inserting the diskette to correct user discipline and remedial action for problem situations. This also includes a complete discussion of all versions of CP/M up to and including 2.2, MP/M and CDOS. $14.95*.

• INTRODUCTION TO TRS-80 GRAPHICS—BK1180—by Don Inman. Dissatisfied with your Level I or Level II manual's coverage of graphics capabilities? This well-structured book (suitable for classroom use) is ideal for those who want to use all the graphics capabilities built into the TRS-80. A tutorial method is used with many demonstrations. It is based on the Level I, but all material is suitable for Level II use. $8.95.*

• TRS-80 DISK AND OTHER MYSTERIES—BK1181—by Harvard C. Pennington. This is the definitive work on the TRS-80 disk system. It is full of detailed "How to" information with examples, samples and in-depth explanations suitable for beginners and professionals alike. The recovery of one lost file is worth the price alone. $22.50.*

• MICROPROCESSOR INTERFACING TECHNIQUES—BK1037—by Austin Lesea & Rodnay Zaks—will teach you how to interconnect a complete system and interface it to all the usual peripherals. It covers hardware and software skills and techniques, including the use and design of model buses such as the IEEE 488 or S-100. $15.95.*

• MICROSOFT BASIC DECODED AND OTHER MYSTERIES—BK1186—by James Farvour. From the company that brought you *TRS-80 DISK AND OTHER MYSTERIES*! Contains more than 6500 lines of comments for the disassembled Level II ROMs, six additional chapters describing every BASIC subroutine, with assembly language routines showing how to use them. Flowcharts for all major routines give the reader a real insight into how the interpreter works. $29.50.

*Use the order card in the back of this magazine or itemize your order on a separate piece of paper and mail to Kilobaud *Microcomputing* Book Department • Peterborough NH 03458. Be sure to include check or detailed credit card information.

No C.O.D. orders accepted. All orders add $1.00 handling. Please allow 4–6 weeks for delivery. Questions regarding your order? Please write to Customer Service at the above address.

PRICES SUBJECT TO CHANGE WITHOUT NOTICE

FOR TOLL FREE ORDERING CALL 1-800-258-5473

Quest ELECTRONICS

✓44

P.O. Box 4430S
Santa Clara, CA 95054
Will calls: 2322 Walsh Ave.
(408) 988-1640 TWX 910-338-2139

Same day shipment. First line parts only. Factory tested. Guaranteed money back. Quality IC's and other components at factory prices.

INTEGRATED CIRCUITS

7400TTL		LM320K-5	1 35	CD4026	2 50
7400N	19	LM320K-12	1 35	CD4027	66
7402N	20	LM320K-15	1 35	CD4028	85
7404N	25	LM320T-5	95	CD4029	1 35
7406N	27	LM320T-8	95	CD4030	45
7410N	25	LM320T-12	95	CD4035	1 00
7414N	70	LM320T-15	95	CD4040	1 35
7420N	25	LM323K-5	5 95	CD4042	85
7422N	39	LM324N	1 00	CD4043	85
7430N	25	LM339N	1 00	CD4044	85
7442N	58	LM340K-5	1 35	CD4046	1 67
7445N	82	LM340K-8	1 35	CD4049	45
7447N	63	LM340K-12	1 35	CD4050	60
7448N	77	LM340K-15	1 35	CD4051	1 13
7450N	25	LM340K-24	1 35	CD4060	1 42
7474N	35	LM340T-5	85	CD4066	71
7475N	49	LM340T-8	85	CD4068	40
7485N	88	LM340T-12	85	CD4069	40
7489N	1 70	LM340T-15	85	CD4070	50
7490N	43	LM340T-18	85	CD4071	45
7492N	43	LM340T-24	85	CD4072	45
7493N	43	LM350	5 50	CD4073	45
7495N	69	LM377	2 95	CD4075	45
74100N	1 35	LM379	5 00	CD4076	1 45
74107N	35	LM380N	1 00	CD4078	40
74121N	34	LM381	1 60	CD4081	35
74123N	59	LM382	1 60	CD4082	35
74125N	45	LM389N	59	CD4116	47
74145N	77	LM723H/N	50	CD4490	5 50
74150N	1 20	LM733N	85	CD4507	1 00
74151N	69	LM741CH	35	CD4508	2 85
74154N	1 25	LM741N	38	CD4510	1 00
74157N	69	LM747H-N	75	CD4511	94
74161N	87	LM748N	50	CD4515	2 52
74162N	85	LM1303N	1 75	CD4516	1 10
74163N	87	LM1304	1 10	CD4518	1 50
74174N	96	LM1305	1 27	CD4520	1 02
74175N	85	LM1307	2 00	CD4527	1 51
74190N	1 15	LM1310	1 95	CD4528	1 60
74192N	87	LM1458	55	CD4553	3 50
74193N	85	LM1812	7 50	CD4566	2 45
74221N	1 25	LM1889	3 00	CD4583	2 35
74298N	1 65	LM2111	1 75	CD4585	1 10
74365N	75	LM2902	2 25	CD40192	3 00
74366N	75	LM3900N	60	74C00	35
74367N	75	LM3905	1 75	74C04	40
		LM3909N	95	74C10	35
74L500 TTL		MC1458V	55	74C14	89
74L500N	29	NE550N	1 35	74C20	35
74L502N	29	NE555V	39	74C30	35
74L504N	35	NE556A	85	74C48	1 95
74L505N	25	NE565A	1 00	74C74	85
74L508N	35	NE566V	1 50	74C76	1 25
74L510N	35	NE567V	1 00	74C90	1 25
74L513N	55	NE570B	4 75	74C93	1 25
74L514N	1 00	78L05	60	74C154	3 50
74L520N	35	78L08	60	74C160	2 75
74L522N	35	78M05	85	74C175	1 35
74L528N	35	75108	1 75	74C192	1 65
74L530N	35	75491CN	50	74C221	1 90
74L533N	60	75492CN	55	74C905	6 00
74L538N	50	75494CN	89	74C906	75
74L574N	45			74C914	1 95
74L575N	65			74C922	5 00
74L590N	60	**A to D CONVERTER**		74C923	5 50
74L593N	75	80388	4 50	74C925	7 50
74L595N	1 00	8700CJ	13 95	74C926	6 95
74LS107N	45	8701CN	22 00	74C927	6 95
74LS112N	45	8750CJ	13 95		
74LS113N	45	LD130	9 95	**INTERFACE**	
74LS132N	89	9400CJ/V-F	7 40	8095	65
74LS136N	50	ICL7103	9 50	8096	65
74LS151N	75	ICL7107	14 25	8097	65
74LS155N	79			8098	65
74LS157N	1 10	**CMOS**		8T09	1 25
74LS162N	1 10	CD4000	25	8T10	4 50
74LS163N	1 10	CD4001	35	8T13	3 00
74LS174N	1 15	CD4002	35	8T20	5 50
74LS190N	1 25	CD4006	1 10	8T23	3 10
74LS221N	1 25	CD4007	35	8T24	3 50
74LS258N	1 00	CD4008	1 20	8T25	3 20
74LS367N	89	CD4009	45	8T26	1 69
		CD4010	45	8T28	2 75
LINEAR		CD4011	35	8T97	1 69
CA3045	90	CD4012	28	8T98	1 69
CA3046	1 10	CD4013	47		
CA3081	1 80	CD4014	1 25		
CA3082	1 90	CD4015	1 00	**MOS/MEMORY RAM**	
CA3089	3 40	CD4016	55	2101-1	2 95
LM301AN/AH	35	CD4017	1 05	2102-1	95
LM305H	87	CD4018	94	2102AL 4	1 45
LM307N	35	CD4019	45	2102AN 2L	1 65
LM308N	1 00	CD4020	1 02	2104A-4	4 95
LM309K	1 25	CD4021	1 35	2107B-4	3 75
LM311H/N	90	CD4022	1 10	2111-1	3 75
LM317T	1 65	CD4023	28	2112-2	3 95
LM317K	3 75	CD4024	75	2114	3 75
LM318	1 50	CD4025	28	2114L 300ns	4 25
				2114L 450ns	4 00
				4116 200ns	3 95
				8-4116 200ns	18 40
				MM5262	40
				MM5280	1 00
				MM5320	9 95
				MM5330	5 94
				PD411D-3	4 00
				PD411D-4	5 00
				P5101L	8 95
				4200A	9 95
				82S25	2 90
				91L02A	1 50
				HD0165-5	6 95
				MM57100	4 50
				GIAY38500-1	9 95
				MCM66751A	9 95
				9368	3 50
				410D	10 00
				416	16 00
				CLOCKS	
				MM5311	5 50
				MM5312	3 90
				MM5314	2 90
				MM5369	2 10
				MM5841	14 45
				MM5865	7 95
				CT7010	8 95
				CT7015	8 95
				MM5375AA/N	3 90
				MM5375AG/N	4 90
				7205	16 50
				7207	7 50
				7208	15 95
				7209	4 95
				DS0026CN	3 75
				DS0056CN	3 75
				MM53104	2 50
				MICROPROCESSOR	
				6502	10 95
				6504	9 95
				6507	9 95
				6800	6 95
				6802	11 95
				6820	4 95
				6850	5 95
				8080A	3 95
				8085	12 95
				8086	75 00
				Z80	9 95
				Z80A	11 95
				8212	2 90
				8214	3 95
				8216	2 90
				8224	3 45
				8228	4 95
				8251	6 95
				8253	15 00
				8255	5 75
				8251	10 95
				8259	14 95
				1802CP plas	13 95
				1802DP plas	17 95
				1861P	9 50
				CDP1802CD	28 95
				CDP1802D	35 00
				CDP1816P	7 95
				UART/FIFO	
				AY5-1013	5 50
				AY5-1014	7 50
				3341	6 95
				PROM	
				1702A	5 85
				2708	6 10
				2716T1	12 00
				2716 5 Volt	12 50
				8-2716 5 Volt	64 00
				2732	19 95
				2758	14 00
				8741A	55 00
				8748	55 00
				8748 8	55 00
				8755A	55 00
				N82S23	2 95
				N82S123	4 95
				N82S126	4 75
				N82S129	4 95
				N82S131	4 95
				N82S136	8 75
				N82S137	8 75
				DM8577	2 90
				8223	3 50

CONNECTORS

30 pin edge	2 50
44 pin edge	2 75
86 pin edge	4 00
100 pin edge	4 50
100 pin edge WW	5 25

IC SOCKETS
Solder Tin Low Profile

PIN	1 UP	PIN	1UP
8	15	22	30
14	14	24	35
16	16	28	42
18	27	36	58
20	29	40	57

2 level 14 pin ww 20

WIRE WRAP LEVEL 3

PIN		PIN	
14	55	24	93
16	57	28	1 00
18	67	40	1 59

CRYSTALS

1 MHz	4 50
2 MHz	4 50
4 MHz	4 25
5 MHz	4 25
10 MHz	4 25
18 MHz	3 90
20 MHz	3 90
32 MHz	3 90
3276.8 Hz	4 00
1 8432 MHz	4 50
2 0000 MHz	4 50
3 5795 MHz	1 20
2 0100 MHz	1 95
2 097152 MHz	4 50
2 4576 MHz	4 50
3 2768 MHz	4 50
5 0688 MHz	4 50
5 185 MHz	4 50
5 7143 MHz	4 50
6 5536 MHz	4 50
14 31818 MHz	4 25
18 432 MHz	4 50
22 1184 MHz	4 50

KEYBOARD ENCODERS

AY5-2376	$12 50
AY5-3600	17 95
AY5-9100	10 50
AY5-9200	16 50
74C922	5 50
74C923	5 50
HD0165-5	6 95
AY5-9400	10 50

D Connectors RS232

DB25P	3 62
DB25S	5 20
Cover	1 67
DE9S	1 95
DA15P	2 10
DA15S	3 10
Complete Set	9 50

Hickok 3½ Digit LED multimeter **89.95**
Stopwatch Kit **26.95**
Auto Clock Kit **17.95**
Digital Clock Kit **14.95**

8K 16K Eprom Kit
(less PROMS) $89 00
Motherboard $39 00
Extender Board $15 00

RESISTORS ¼ watt 5%

10 per type	03
25 per type	025
100 per type	015
1000 per type	012
350 piece pack	
5 per type	6 75

½ watt 5% per type 05

Televideo Terminal

Model 912	$785 00
Model 920	$885 00

KEYBOARDS

56 key ASCII keyboard kit	$67 50
Fully assembled	77 50
53 key ASCII keyboard kit	60 00
Fully assembled	70 00
Enclosure Plastic	14 95
Metal Enclosure	29 95

LEDS

Red T018	15
Green, Yellow T018	20
Jumbo Red	20
Green Orange Yellow Jumbo	25
Cliplite LED Mounting Clips	8/$1 25
(specify red, amber, green, yellow, clear)	

CONTINENTAL SPECIALTIES in stock
Complete line of breadboard test equip
MAX-100 8 digit Freq. Ctr. **$149.95**

QK WIRE WRAP TOOLS in stock
Portable Multimeter **$18.00**
Complete line of AP Products in stock

SPECIAL PRODUCTS

MM5865 Stopwatch Timer with 10 pg. spec	9 00
P.C. board	7 50
Switches Mom. Pushbutton	27
3 pos. slide	25
Encoder HD0165-5	6 95
Paratronics	
Model 10 Trigger Expander Kit	$229 00
Model 150 Bus Grabber Kit	$369 00
Clock Calendar Kit	**$23.95**
2.5 MHz Frequency Counter Kit	**$37.50**
30 MHz Frequency Counter Kit	**$47.75**

TRANSFORMERS

6V 300 ma	3 25
12 Volt 300 ma transformer	1 25
12 6V CT 600 ma	3 75
12V 250 ma wall plug	2 95
12V CT 250 ma wall plug	3 75
24V CT 100 ma	3 95
10V 1 2 amp wall plug	4 85
12V 6 amp	12 95
12V 500 ma wall plug	4 75
12V 1 amp wall plug	6 50
10 15 VAC 8 16 VA wall plug	9 75


DISPLAY LEDS

MAN1	CA	270	2 90
MAN3	CC	125	39
MAN72-74	CA CA	300	1 00
DL704	CC	300	1 25
DL707 DL707R	CA	300	1 00
DL727 728	CA-CC	500	1 90
DL747 750	CA-CC	600	1 95
FND359	CC	357	70
FND500 507	CC CA	500	1 35
FND503-510	CC CA	500	90
FND800-807	CC CA	800	2 20
3 digit Bubble			60
10 digit display			1 25
7520 Clarex photocells			39
TIL341 Hex			9 50
MAN3640	CC	30	1 10
MAN4610	CA	40	1 20
MAN4640	CC	40	1 20
MAN4710	CA	40	95
MAN4740	CC	40	1 20
MAN6640	CC	56	2 95
MAN6710	CA	60	1 35
MAN6740	CC	60	1 35
MA1002A, C, E			**8.95**
MA1012A			**8.95**
102P3 transformer			**2.25**
MA1012A Transformer			**2.25**

DIP Switches

4-position	$ 95
5-position	1 00
6-position	1 00
7-position	1 00
8-position	1 05

4116 200ns Dynamic RAM
8/$18.40

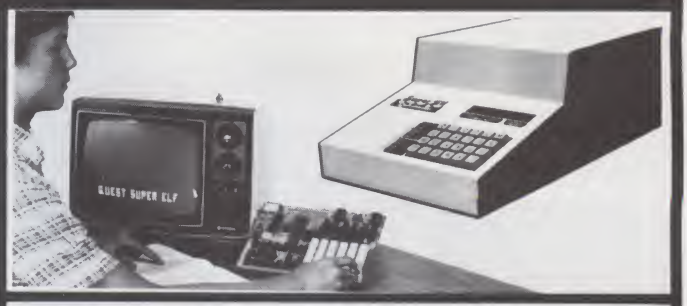

RCA Cosmac 1802 Super Elf Computer $106.95

Compare features before you decide to buy any other computer. There is no other computer on the market today that has all the desirable benefits of the **Super Elf** for so little money. The Super Elf is a small single board computer that does many **big** things. It is an excellent computer for training and for learning programming with its machine language and yet it is easily **expanded** with **additional memory, Full Basic, ASCII Keyboards, video character generation, etc.**

Before you buy another small computer, see if it includes the following features: ROM monitor; State and Mode displays; Single step; Optional address displays; Power Supply; Audio Amplifier and Speaker; Fully socketed for all IC's; Real cost of in warranty repairs; Full documentation.

The **Super Elf** includes a **ROM** monitor for program loading, editing and execution with **SINGLE STEP for program debugging** which is not included in others at the same price. With **SINGLE STEP** you can see the microprocessor chip operating with the **unique Quest** address and data bus displays **before, during** and **after** executing instructions. Also, CPU mode and instruction cycle are decoded and displayed on 8 LED indicators.

An RCA 1861 **video graphics** chip allows you to connect to your own TV with an inexpensive video modulator to do graphics and games. There is a **speaker system** included for writing your own music or using many music programs already written. The speaker amplifier may also be used to drive relays for control purposes.

A 24 key **HEX keyboard** includes 16 HEX keys plus **load, reset, run, wait, input, memory protect, monitor select** and **single step**. Large, on board displays provide output and optional **high and low address**. There is a 44 pin standard connector slot for PC cards and a 50 pin connector slot for the Quest Super Expansion Board. Power supply and sockets for **all** IC's are included in the price plus a detailed 127 pg. instruction manual which now includes over 40 pgs. of software info. including a series of lessons to help get you started and a music program and graphics target game. Many schools and universities are using the Super Elf as a course of study. OEM's use it for training and R&D.

Remember, other computers only offer Super Elf features at additional cost or not at all. **Compare before you buy. Super Elf Kit $106.95, High address option $8.95, Low address option $9.95. Custom Cabinet** with drilled and labelled plexiglass front panel **$24.95.** All metal Expansion Cabinet, painted and silk screened, with room for 5 S-100 boards and power supply **$57.00. NiCad Battery Memory Saver Kit $6.95.** All kits and options also completely assembled and tested.

Questdata, a software publication for 1802 computer users is available by subscription for $12.00 per 12 issues. Single issues $1.50. Issues 1-12 bound $16.50.

Free 14 page brochure.

Moews Video Graphics **$3.50.** Games and Music **$3.00**, Chip 8 Interpreter **$5.50.**

Super Expansion Board with Cassette Interface $89.95

This is truly an astounding value! This board has been designed to allow **you** to decide how you want it optioned. **The Super Expansion Board comes with 4K of low power RAM** fully addressable anywhere in 64K with built-in memory protect and a **cassette interface**. Provisions have been made for all other options on the same board and it fits neatly into the hardwood cabinet alongside the **Super Elf**. The board includes slots for up to 6K of **EPROM** (2708, 2758, 2716 or TI 2716) and is **fully socketed.** EPROM can be used for the monitor and Tiny Basic or other purposes.

A 1K Super ROM Monitor $19.95 is available as an on board option in 2708 EPROM which has been preprogrammed with a program loader/editor and error checking multi file cassette read/write software, (relocatable cassette file) another exclusive from Quest. It includes register save and readout, block move capability and video graphics driver with blinking cursor. Break points can be used with the register save feature to isolate program bugs quickly, then follow with single step. If you have the **Super Expansion Board** and **Super Monitor** the monitor is up and running at the push of a button.

Other on board options include **Parallel Input and Output Ports** with **full handshake**. They allow easy connection of an ASCII keyboard to the input port. **RS 232 and 20 ma Current Loop** for teletype or other device are on board and if you need more memory there are two **S-100** slots for static RAM or video boards. Also a 1K Super Monitor version 2 with video driver for full capability display with Tiny Basic and a video interface board. **Parallel I/O Ports $9.85, RS 232 $4.50, TTY 20 ma I/F $1.95, S-100 $4.50.** A **50 pin connector set** with ribbon cable is available at $15.25 for easy connection between the **Super Elf** and the **Super Expansion Board.**

Power Supply Kit for the complete system (see Multi-volt Power Supply).

Quest Super Basic V5.0

A new enhanced version of **Super Basic** now available. Quest was the first company worldwide to ship a full size Basic for 1802 Systems. A complete function **Super Basic** by **Ron Cenker** including floating point capability with scientific notation (number range $\pm 10^{-38}$), 32 bit integer ± 2 billion; multi dim arrays, string arrays; string manipulation; cassette I/O; save and load, basic, data and machine language programs; and over 75 statements, functions and operations.

New improved faster version including **renumber** and essentially **unlimited variables.** Also, an exclusive user expandable command library.

Serial and Parallel I/O included.

Super Basic on Cassette $55.00.

Ohio Scientific Computers

CIP Series 2 **$447.00.** Like an Apple at less than half the price! CIPMF Series 2 **$1199.00.** Minifloppy version with additional RAM/ROM. Complete software and peripherals available. Send for free brochure.

Gremlin Color Video Kit $69.95

32 x 16 alpha/numerics and graphics; up to 8 colors with 6847 chip; 1K RAM at E000. Plugs into Super Elf 44 pin bus. No high res. graphics. On board RF Modulator Kit **$4.95**

1802 16K Dynamic RAM Kit $149.00

Expandable to 32K. Hidden refresh w/clocks up to 4 MHz w/no wait states. Addl. 16K RAM **$25.00**

Tiny Basic Extended on Cassette $15.00
(added commands include Stringy, Array, Cassette I/O etc.) S-100 4-Slot Expansion $ 9.95
Super Monitor VI.I Source Listing $15.00

Elf II Adapter Kit $24.95

Plugs into Elf II providing Super Elf 44 and 50 pin plus S-100 bus expansion. (With Super Expansion). High and low address displays, state and mode LED's optional **$18.00.**

Super Color S-100 Video Kit $129.95

Expandable to 256 x 192 high resolution color graphics. 6847 with all display modes computer controlled. Memory mapped. 1K RAM expandable to 6K. S-100 bus 1802, 8080, 8085, Z80 etc.

Dealers: Send for excellent pricing/margin program.

Editor Assembler $25.00
(Requires minimum of 4K for E/A plus user source)
1802 Tiny Basic Source listing $19.00
Super Monitor V2.0/2.1 Source Listing $20.00

PROM Eraser

assembled. 25 PROM capacity **$37.50** (with timer **$69.50**). 6 PROM capacity OSHA/UL version **$69.50** (with timer **$94.50**).

Z80 Microcomputer

16 bit I/O, 2 MHz clock, 2K RAM, ROM Breadboard space. Excellent for control. Bare Board **$28.50.** Full Kit **$99.00.** Monitor **$20.00.** Power Supply Kit **$35.00. Tiny Basic $30.00**

S-100 Computer Boards

8K Static Godbout Econo IIA Kit	149.00
16K Static Godbout Econo XIV Kit	269.00
24K Static Godbout Econo XX-24 Kit	414.00
32K Static Godbout Econo XX-32 Kit	537.00
16K Dynamic RAM Kit	289.00
32K Dynamic RAM Kit	328.00
64K Dynamic RAM Kit	399.00
Video Interface Kit	**$161.00**
Color Video Kit	129.95

81 IC Update Master Manual $79.95

Comp. IC data selector, 2 vol. master reference guide. Over 51,000 cross references. Free update service through 1981. Domestic postage $4.75.

Modem Kit $60.00

State of the art, orig., answer. No tuning necessary. 103 compatible 300 baud. Inexpensive acoustic coupler plans included. Bd. only $17.00. Article in May *Radio Electronics*.

LRC 7000 + Printer $389.00

64/40/32/20 column dot matrix impact, std. *paper. Interface all personal computers.*

LRC 7000 printer interface cable for Super Elf with software $35.00

NiCad Battery Fixer/Charger Kit

Opens shorted cells that won't hold a charge and then charges them up, all in one kit w/full parts and instructions. **$9.95**

Rockwell AIM 65 Computer

6502 based single board with full ASCII keyboard and 20 column thermal printer. 20 char. alphanumeric display, ROM monitor, fully expandable. **$405.00.** 4K version **$450.00.** 4K Assembler **$85.00**, 8K Basic Interpreter **$100.00**.

Special small power supply for AIM65 assem. in frame **$54.00.** Complete AIM65 in thin briefcase with power supply **$499.00.** Molded plastic enclosure to fit both AIM65 and power supply **$47.50.** Special Package Price: 4K AIM, 8K Basic, power supply, cabinet **$625.00.**

AIM65/KIM/VIM/Super Elf 44 pin expansion board; 3 female and 1 male bus. Board plus 3 connectors **$22.95.**

60 Hz Crystal Time Base Kit $4.40

Converts digital clocks from AC line frequency to crystal time base. Outstanding accuracy.

Video Modulator Kit $9.95

Convert TV set into a high quality monitor w/o affecting usage. Comp. kit w/full instruc.

Multi-volt Computer Power Supply

8v 5 amp, ±18v .5 amp, 5v 1.5 amp, −5v .5 amp, 12v .5 amp, −12v option. ±5v, ±12v are regulated. Basic Kit **$35.95.** Kit with chassis and all hardware **$51.95.** Add $5.00 shipping. Kit of hardware **$16.00.** Woodgrain case **$10.00.** $1.50 shipping.

TERMS: $5.00 min. order U.S. Funds. Calif residents add 6% tax.
$10.00 min. BankAmericard and Master Charge accepted. $1.00 insurance optional.
Postage: Add 5%. C.O.D. $10.00 min. order.

FREE: Send for your copy of our NEW 1981 QUEST CATALOG. Include 48¢ stamp.

✓See List of Advertisers on page 194

TRS-80 SERIAL I/O

• Can input into basic • Can use LLIST and LPRINT to output, or output continuously • RS-232 compatible • Can be used with or without the expansion bus • On board switch selectable baud rates of 110, 150, 300, 600, 1200, 2400, parity or no parity odd or even, 5 to 8 data bits, and 1 or 2 stop bits. D.T.R. line • Requires +5, -12 VDC • Board only $19.95 Part No. 8010, with parts $76.69 Part No. 8010A, assembled $98.25 Part No. 8010 C. No connectors provided, see below.






EIA/RS-232 connector Part No. DB25P $6.00, with 9, 8 conductor cable $19.65 Part No DB25P9



3' ribbon cable with attached connectors to fit TRS-80 and our serial board $37.10 Part No 3CAB40

VIDEO TERMINAL



16 lines, 64 columns • Upper and lower case • 5x7 dot matrix • Serial RS-232 in and out with TTL parallel keyboard input • On board baud rate generator 75, 110, 150, 300, 600, & 1200 jumper selectable • Memory 1024 characters (7-21L02) • Video processor chip SFF96364 by Neculonic • Control characters (CR, LF, →, ←, ↑, ↓, non destructive cursor, CS, home, CL • White characters on black background or vice-versa • With the addition of a keyboard, video monitor or TV set with TV interface (part no. 107A) and power supply this is a complete stand alone terminal • also S-100 compatible • requires +16, & −16 VDC at 100mA, and 8VDC at 1A. Part No. 1000A $296.45 kit.

GAME PADDLES & SOUND FOR TRS-80



Includes: 2 game paddles, interface, software, speaker, power supply, full documentation including: schematics, theory of operation, and user guide; plus 2 games on cassette, Pong and Starship War $157.29 Complete Part No. 7922C

SERIAL/ PARALLEL INTERFACE




• Converts serial to parallel and parallel to serial • Low cost on board baud rate generator • 110 to 19.2K • Low power drain +5 volts and -12 volts required • TTL compatible • All characters contain a start bit, 5 to 8 data bits, 1 or 2 stop bits, and either odd or even parity. • All connections go to a 44 pin gold plated edge connector • Board only $11.95 Part No. 101, with parts $42.89 Part No. 101A, 44 pin edge connector $4.00 Part No. 44P

MODEM



• Type 103 • Full or half duplex • Works up to 300 baud • Originate or Answer • Serial TTL input and output • connect 8 Ω speaker and crystal mic. directly to board • Requires +5 volts • Board only $7.60 Part No. 109, with parts $29.95 Part No. 109A.

OPTO-ISOLATED PARALLEL INPUT BOARD FOR APPLE II




There are 8 inputs that can be driven from TTL logic or any 5 volt source. The circuit board can be plugged into any of the 8 sockets of your Apple II. It has a 16 pin socket for standard dip ribbon cable connection. Board only $15.65 Part No. 120, with parts $69.95. Part No. 120A.

SUPER MODEM



Originate, RS-232 and 20 mA compatable. Full duplex, and half duplex, direct connect or acoustic coupled, on board power supply, carrier detect light, DB25 plug, 300 BAUD, Type 103 compatable frequencies. Bare board Part No. 2000 $21.89, Kit Part No. 2000A $133.80

8K EPROM SAVER



• Programs 2708's address relocation of each 4K of memory to any 4K boundary • Power on jump and reset jump option for "turnkey" systems and computers without a front panel • Program saver software in 1 2708 EPROM $25. Bare board $45.59 including custom coil, board with parts but no EPROMS $164.69.

APPLE II SERIAL I/O INTERFACE



Baud rate is continuously adjustable from 0 to 30,000 • Plugs into any peripheral connector • Low current drain. RS-232 input and output • On board switch selectable 5 to 8 data bits, 1 or 2 stop bits, and parity or no parity either odd or even • Jumper selectable address • SOFTWARE • Input and Output routine from monitor or BASIC to teletype or other serial printer • Program for using an Apple II for a video or an intelligent terminal. Also can output in correspondence code to interface with some selectrics. • Also watches DTR • Board only $14.95 Part No. 2, with parts $51.25 Part No. 2A, assembled $62.95 Part No. 2C

PARALLEL TRIAC OUTPUT BOARD FOR APPLE II



This board has 8 triacs capable of switching 110 volt 6 amp loads (660 watts per channel) or a total of 5280 watts. Board only $15.65 Part No. 210, with parts $119.95 Part No. 210A

APPLE II PROTOTYPING HOBBY/CARD

Part No. 7907 $21.95

RS-232/20mA INTERFACE

This board has two passive, opto-isolated circuits. One converts RS-232 to 20mA, the other converts 20mA to RS-232. All connections go to a 10 pin edge connector. Requires +12 and -12 volts. Board only $9.95, part no. 7901, with parts $14.95 Part No. 7901A.

T.V. INTERFACE



• Converts video to AM modulated RF, Channels 2 or 3. So powerful almost no tuning is required. On board regulated power supply makes this extremely stable. Rated very highly in Doctor Dobbs' Journal. Recommended by Apple • Power required is 12 volts AC C.T., or +5 volts DC • Board only $8.19 part No. 107, with parts $18.85 Part No. 107A

TAPE INTERFACE



• Converts a low cost tape recorder to a digital recorder • Works up to 1200 baud • Digital in and out are TTL-serial • Output of board connects to mic. in of recorder • Earphone of recorder connects to input on board • No coils • Requires +5 volts, low power drain • Board only $7.60 Part No. 111, with parts $29.95 Part No. 111A

RS-232/TTL INTERFACE




• Converts TTL to RS-232, and converts RS-232 to TTL • Two separate circuits • Requires -12 and +12 volts • All connections go to a 10 pin edge connector, kit $9.95 Part No. 232A 10 Pin edge connector $3.00 part No. 10P.

S-100 BUS ACTIVE TERMINATOR




Board only $18.15 Part No. 900, with parts $29.89 Part No. 900A.

SERIAL I/O



Four Serial I/O RS-232 ports. S-100 Bus, Software or jumper selectable baud rate (110, 300, 600, 1200, 2400, 4800, 9600, 19.2K), on board Xtal baud rate generator. Addressing, switch selectable, Parity or no parity (odd or even) switch selectable, 1 or 2 stop bits, 5 to 8 bits/character. Board only $35.19 Part No. 7908. With parts (kit) $199.95, Part No. 7908A.

RS-232/TTY INTERFACE



This board has two active circuits, one converts RS-232 to 20 mA, the other converts 20 mA to RS-232. Requires +12 and -12 volts. $9.95 Part No. 600A Kit.

Send for FREE catalog . . . a big self-addressed envelope with 86¢ postage gets it fastest!

To Order: Mention part no., description, and price. In USA shipping paid by us for orders accompanied by check or money order. We accept C.O.D. orders (U.S. only) or a VISA or Master Charge no., expiration date, signature and phone no., shipping charges will be added. CA residents add 6.5% for tax. Outside USA add 15% for air mail postage and handling. Payment must be in U.S. dollars. Dealer inquiries invited. Prices subject to change without notice.

ORDER LINE: (408) 226-4064

ELECTRONIC SYSTEMS Dept. KB, P.O. Box 18220, San Jose, CA USA 95158

47

Why use their flexible discs:

Ampex, Athana, BASF, Caelus, Control Data, Dysan, IBM, Inmac, K-Line, Maxell, Nashua, Scotch, Shugart, Syncom, 3M, Verbatim or Wabash

when you could be using

MEMOREX

for as low as $1.99 each?

Find the flexible disc you're now using on our cross reference list... then write down the equivalent Memorex part number you should be ordering.

Product Family	Product Description	Memorex Part Number (3301-)	CE quant. 100 price per disc ($)	Ampex	Athana	BASF	Caelus	Dysan	IBM	K-Line	Maxell	Nashua	Scotch 3M	Shugart	Syncom	Verbatim	Wabash	Inmac	Control Data
Flexible Disc 1s	IBM Compatible (128 B/S, 26 sectors)	3060	2.19	5FD-111110	473071	53428	CM-F11	800506	2305830	40013	FD1-128	FD-1	740-0	S/A 100	15002	FD34-1000	F111111X	7870-K	421602
	IBM Compatible (128 B/S, 26 sectors) w/ W.P.N.	3062	2.24	–	–	–	–	–	–	–	–	–	740-0	–	–	–	–	–	–
	IBM Compatible (128 B/S, 26 sectors) w/ W.P.N. & Hub ring	3064	2.55	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
Single-Headed Drives	IBM Compatible (128 B/S, 26 sectors) REVERSIBLE	1729	3.35	5FD-113110	473072	54431	–	–	–	40015	–	FD-2	740/2-0	–	15150	FF34-2000	F171111X	7860-K	–
Single Density Media	IBM System 6 Compatible	3066	2.19	–	473077	54561	–	800509	1669959	40014	–	–	740-0 086	–	15003	FD60-1000	F116111X	–	–
	IBM Compatible (256 B/S, 15 sectors)	3109	2.19	5FD-111210	473073	–	–	800584	2305845	40040	–	–	740-3600	–	15005	FD36-1000	F112111X	7861-K	–
	IBM Compatible (512 B/S, 8 sectors)	3110	2.19	–	473074	–	–	800585	1669954	40044	–	–	–	–	15004	FD60-1000	F113111X	7889-K	–
	Shugart Compatible, 32 hard sector	3015	2.19	5FD-211010	470901	53802	CM-F21	101/1	–	40016	FH1-32	FD-132	740-32	S/A-101	15025	FD32-1000	–	7890-K	421322
	Shugart Compatible, 32 hard sector REVERSIBLE	3025	3.35	5FD-213010	–	–	–	–	–	40017	–	–	740/2-32	–	15151	FF32-2000	–	7880-K	–
	Wang Compatible, 32 hard sector w/Hub ring	3067	2.50	–	–	54491	–	–	–	–	–	–	740-32RM	–	–	–	F37A411X	–	–
	CPT 8000 Compatible	3045	2.79	–	–	–	–	–	–	–	–	–	–	–	15226	–	–	–	–
Flexible Disc 1d	IBM Compatible (128 B/S, 26 sectors)	3090	2.95	5FD-121010	474071	54568	–	3740/1D	–	40047	FD1-128-M2100	FD-1D	741-0	–	–	FD34-8000	F131111X	7857-K	423002
	Soft Sector (128 B/S, 26 sectors) REVERSIBLE	3093	3.99	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
Single-Headed Drives	Shugart Compatible, 32 hard sector	3091	2.95	5FD-221010	470801	54596	–	101/1D	–	40024	FH1-32D	–	741-32	S/A-103	15075	FD32-8000	F33A410X	7867-K	423322
Double Density Media	Shugart Compatible, 32 hard sector REVERSIBLE	3094	3.99	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
	Wang Compatible, 32 hard sector w/Hub ring	3088	3.20	–	–	–	–	–	–	–	–	–	–	–	–	–	F22A411X	–	–
Flexible Disc 2s	Soft Sector (Unformatted)	3101	3.84	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
	Soft Sector (128 B/S, 26 sectors)	3113	3.84	–	–	54428	–	800814	1766670	–	–	–	–	S/A-150	15153	FD10-4026	F121111X	–	–
Double Headed Drives	Soft Sector (256 B/S, 15 sectors)	3106	3.84	–	473477	54228	–	800815	2736700	40043	FD2-256D	–	742-0	–	15154	FD10-4015	F122111X	7856-K	424612
Single-Density Media	32 Hard Sector	3108	3.84	–	–	–	–	–	–	–	FH2-32	–	–	–	–	–	–	–	–
Flexible Disc 2d	Soft Sector (Unformatted)	3102	3.49	–	473485	–	–	DY150	–	40026	FD2-X0M	FD-2D	743-0	–	15103	DD34-4001	–	–	425002
	Soft Sector (128 B/S, 26 sectors)	3118	3.49	–	–	–	–	–	–	–	–	–	–	S/A-150	–	–	–	–	–
Double-Headed Drives	Soft Sector (256 B/S, 26 sectors)	3103	3.49	–	473471	54325	–	800817	1766872	40019	FD2-2560	–	743-0/256	–	15101	DD34-4026	F144111X	7858-K	425602
Double-Density Media	Soft Sector (512 B/S, 15 sectors)	3114	3.49	–	473472	54479	–	800818	1869044	40039	–	–	743-0/512	–	15100	DD34-4015	F145111X	–	425612
	Soft Sector (1024 B/S, 8 sectors)	3104	3.49	–	473473	54465	–	800819	1669045	40020	–	–	743-0/1024	–	15102	DD34-4008	F147111X	7859-K	425622
	32 Hard Sector	3105	3.49	5FD-321010	470851	–	–	101/2D	–	40021	FH2-32D	–	743-32	S/A-151	15125	DD32-4000	F34A411X	7881-K	425322
	Burroughs B-80 Compatible 32 Hard Sector	3092	3.49	–	–	–	–	–	–	–	–	–	–	–	–	–	F34AB11X	–	–
	Soft Sector (1024 B/S, 8 sectors) w/ Hub Ring	3116	3.75	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
Flexible Disc FD																			
Memorex 651 or Equiv Drive Compatible	FD VI (Vinyl Jacket)	30712003	2.95	–	470851	–	CM-F31	FDIV	–	40002	–	FD-165	511-0	–	15026	FD65-1000	F61A111x	7910	–
Mini Flexible Disc 1s	Soft Sector (Unformatted)	3401	1.99	–	475001	54256	–	104/1	–	40500	MD1	MD 1	744-0	S/A-104	15300	MD525-01	M11A211X	7897	441002
5¼" Single-Headed Drives	10 Hard Sector	3403	1.99	–	475010	54257	–	107/1	–	40501	–	MD 110	744-10	S/A-107	15325	MD525-10	M41A211X	7898	441102
Single-Density Media	18 Hard Sector	3405	1.99	–	475016	54258	–	105/1	–	40502	MH1	MD 118	744-18	S/A-105	15326	MD525-18	M51A211X	7899	441162
	Soft Sector (Unformatted) W/Hub Ring	3431	2.19	–	–	–	–	–	–	–	–	–	–	–	–	MD525-01	–	–	–
	10 Hard Sector, w/Hub Ring	3433	2.19	–	–	–	–	–	–	–	–	–	–	–	–	MD825-10	–	–	–
	18 Hard Sector, w/Hub Ring	3435	2.19	–	–	–	–	–	–	–	–	–	–	–	–	MD825-18	–	–	–
Mini Flexible Disc 1d	Soft Sector	3417	2.24	–	–	54646	–	104/1D	–	–	–	–	–	–	–	MD840-01	–	–	–
5¼" Single-Headed Drives	10 Hard Sector	3418	2.24	–	–	54649	–	107/1D	–	–	–	–	–	–	–	MD540-10	–	–	–
Double-Density Media	18 Hard Sector	3419	2.24	–	–	54652	–	105/1D	–	–	–	–	–	–	–	MD540-18	–	–	–
Mini Flexible Disc 2d	Soft Sector	3421	2.74	–	–	54624	–	104/2D	–	–	MD2-D	–	745-0	S/A-154	–	MD550-01	–	–	–
5¼" Double-Headed Drives	10 Hard Sector	3423	2.74	–	–	54627	–	107/2D	–	–	–	–	745-10	S/A-157	–	MD550-10	–	–	–
Double Density Media	18 Hard Sector	3425	2.74	–	–	54630	–	105/20	–	–	MH2-D	–	745-18	S/A-155	–	MD550-18	–	–	–

Memorex Flexible Discs...The Ultimate in Memory Excellence

Quality
Memorex means quality products that you can depend on. Quality control at Memorex means starting with the best materials available. Continual surveillance throughout the entire manufacturing process. The benefit of Memorex's years of experience in magnetic media production, resulting, for instance, in proprietary coating formulations. The most sophisticated testing procedures you'll find anywhere in the business.

100 Percent Error Free
Each and every Memorex Flexible Disc is certified to be 100 percent error free. Each track of each flexible disc is tested, individually, to Memorex's stringent standards of excellence. They test signal amplitude, resolution, low-pass modulation, overwrite, missing pulse error and extra pulse error. They are torque-tested, and competitively tested on drives available from almost every major drive manufacturer in the industry including drives that Memorex manufacturers. Rigid quality audits are built into every step of the manufacturing process and stringent testing result in a standard of excellence that assures you, our customer, of a quality product designed for increased data reliability and consistent top performance.

Customer-Oriented Packaging
Memorex's commitment to excellence does not stop with a quality product. They are proud of their flexible discs and they package them with pride. Both their packaging and their labeling have been designed with your ease of identification and use in mind. The desk-top box containing ten discs is convenient for filing and storage. Both box labels and jacket labels provide full information on compatibility, density, sectoring, and record length. Envelopes with multi-language care and handling instructions and color-coded removable labels are included. A write-protect feature is available to provide data security.

Full One Year Warranty — Your Assurance of Quality
Memorex Flexible Discs will be replaced free of charge by Memorex if they are found to be defective in materials or workmanship within one year of the date of purchase. Other than replacement, Memorex will not be responsible for any damages or losses (including consequential damages) caused by the use of Memorex Flexible Discs.

Quantity Discounts Available
Memorex Flexible Discs are packed 10 discs to a carton and 10 cartons to a case. Please order only in increments of 100 units for quantity 100 pricing. We are also willing to accommodate your smaller orders. Quantities less than 100 units are available in increments of 10 units at a 10% surcharge. **Quantity discounts** are also available. Order 500 or more discs at the same time and deduct 1%; 1,000 or more saves you 2%; 2,000 or more saves you 3%; 5,000 or more saves you 5%; 10,000 or more saves you 7%; 25,000 or more saves you 8%; 50,000 or more saves you 9% and 100,000 or more discs earns you a 10% discount off our super low quantity 100 price. Almost all Memorex Flexible Discs are immediately available from **CE**. Our warehouse facilities are equipped to help us get you the quality product you need, when you need it. If you need further assistance to find the flexible disc that's right for you, call the Memorex compatibility hotline. Dial 800-538-8080 and ask for the *flexible disc hotline* extension 0997. In California dial 800-672-3525 extension 0997.

Buy with Confidence
To get the fastest delivery from **CE** of your Memorex Flexible Discs, send or phone your order directly to our Computer Products Division. Be sure to calculate your price using the **CE** prices in this ad. Michigan residents please add 4% sales tax. Written purchase orders are accepted from approved government agencies and most well rated firms at a 10% surcharge for net 10 billing. All sales are subject to availability. All sales are final. Prices, terms and specifications are subject to change without notice. Out of stock items will be placed on backorder automatically unless **CE** is instructed differently. International orders are invited with a $20.00 surcharge for special handling in addition to shipping charges. All shipments are F.O.B. Ann Arbor, Michigan. No COD's please. Non-certified and foreign checks require bank clearance.

Mail orders to: **Communications Electronics**, Box 1002, Ann Arbor, Michigan 48106 U.S.A. Add $8.00 per case or partial-case of 100 8-inch discs or $6.00 per case of 100 5¼-inch mini-discs for U.P.S. *ground* shipping and handling in the continental U.S.A. If you have a Master Charge or Visa card, you may call anytime and place a credit card order. **Order toll-free** in the United States. Call anytime 800-521-4414. If you are outside the U.S. or in Michigan, dial 313-994-4444. **Dealer inquiries invited**. All order lines at **Communications Electronics** are staffed 24 hours.


Copyright ©1981 Communications Electronics™

MEMBER DIRECT MARKETING ASSOCIATION

VISA

master charge

Order Toll-Free! (800) 521-4414

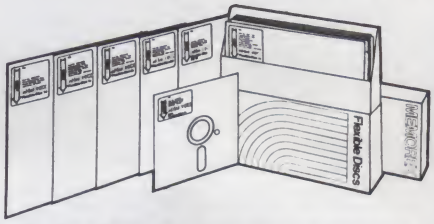

For Data Reliability—Memorex Flexible Discs

COMMUNICATIONS ELECTRONICS™

✓376

Computer Products Division


854 Phoenix ☐ Box 1002 ☐ Ann Arbor, Michigan 48106 U.S.A.
Call TOLL-FREE (800) 521-4414 or outside U.S.A. (313) 994-4444

DIGITAL RESEARCH COMPUTERS
(214) 271-3538

ALL SALES ARE MADE SUBJECT TO THE TERMS OF OUR 90 DAY LIMITED WARRANTY. A COPY OF THIS WARRANTY IS AVAILABLE FREE, ON REQUEST.

32K S-100 EPROM CARD

NEW!



$79.95 KIT

USES 2716's

Blank PC Board - $34

ASSEMBLED & TESTED ADD $30

SPECIAL: 2716 EPROM's (450 NS) Are $9.95 Ea. With Above Kit.

KIT FEATURES:
1. Uses +5V only 2716 (2Kx8) EPROM's.
2. Allows up to 32K of software on line!
3. IEEE S-100 Compatible.
4. Addressable as two independent 16K blocks.
5. Cromemco extended or Northstar bank select.
6. On board wait state circuitry if needed.
7. Any or all EPROM locations can be disabled.
8. Double sided PC board, solder-masked, silk-screened.
9. Gold plated contact fingers.
10. Unselected EPROM's automatically powered down for low power.
11. Fully buffered and bypassed.
12. Easy and quick to assemble.

32K SS-50 RAM

$329.00 KIT

For 2MHZ Add $10

Blank PC Board $50

For SWTPC 6800 - 6809 Buss

Support IC's and Caps $19.95

Complete Socket Set $21.00

Fully Assembled, Tested, Burned In Add $30

NEW!

At Last! An affordable 32K Static RAM with full 6809 Capability.


FEATURES:
1. Uses proven low power 2114 Static RAMS.
2. Supports SS50C - EXTENDED ADDRESSING.
3. All parts and sockets included.
4. Dip Switch address select as a 32K block.
5. Extended addressing can be disabled.
6. Works with all existing 6800 SS50 systems.
7. Fully bypassed. PC Board is double sided, plated thru, with silk screen.

16K STATIC RAM KIT-S 100 BUSS

PRICE CUT!

$169.95 KIT

FOR 4MHZ ADD $10

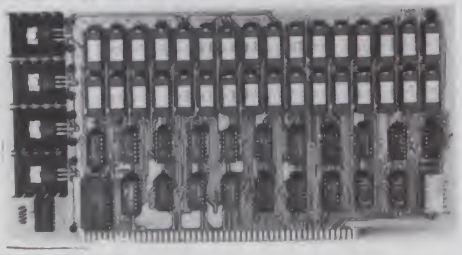

KIT FEATURES:
1. Addressable as four separate 4K Blocks.
2. ON BOARD BANK SELECT circuitry. (Cromemco Standard!). Allows up to 512K on line!
3. Uses 2114 (450NS) 4K Static Rams.
4. ON BOARD SELECTABLE WAIT STATES.
5. Double sided PC Board, with solder mask and silk screened layout. Gold plated contact fingers.
6. All address and data lines fully buffered.
7. Kit includes ALL parts and sockets.
8. PHANTOM is jumpered to PIN 67.
9. LOW POWER: under 1.5 amps TYPICAL from the +8 Volt Buss.
10. Blank PC Board can be populated as any multiple of 4K.

BLANK PC BOARD W/DATA-$33

LOW PROFILE SOCKET SET-$12

SUPPORT IC'S & CAPS-$19.95

ASSEMBLED & TESTED-ADD $35

OUR #1 SELLING RAM BOARD!


16K STATIC RAM SS-50 BUSS

PRICE CUT!

$159 KIT

FULLY STATIC!

FOR 2MHZ ADD $10



FOR SWTPC 6800 BUSS!

ASSEMBLED AND TESTED - $35

KIT FEATURES:
1. Addressable on 16K Boundaries
2. Uses 2114 Static Ram
3. Fully Bypassed
4. Double sided PC Board. Solder mask and silk screened layout
5. All Parts and Sockets included
6. Low Power: Under 1.5 Amps Typical

BLANK PC BOARD—$35 COMPLETE SOCKET SET—$12

SUPPORT IC'S AND CAPS—$19.95

NEW! **STEREO! S-100 SOUND COMPUTER BOARD** NEW!

At last, an S-100 Board that unleashes the full power of two unbelievable General Instruments AY3-8910 NMOS computer sound IC's. Allows you under total computer control to generate an infinite number of special sound effects for games or any other program. Sounds can be called in BASIC, ASSEMBLY LANGUAGE, etc.

COMPLETE KIT! **$84.95** (WITH DATA MANUAL)

BLANK PC BOARD W/DATA $31

KIT FEATURES:
- ★ TWO GI SOUND COMPUTER IC'S.
- ★ FOUR PARALLEL I/O PORTS ON BOARD.
- ★ USES ON BOARD AUDIO AMPS OR YOUR STEREO.
- ★ ON BOARD PROTO TYPING AREA.
- ★ ALL SOCKETS, PARTS AND HARDWARE ARE INCLUDED.
- ★ PC BOARD IS SOLDERMASKED, SILK SCREENED, WITH GOLD CONTACTS.
- ★ EASY, QUICK, AND FUN TO BUILD. WITH FULL INSTRUCTIONS.
- ★ USES PROGRAMMED I/O FOR MAXIMUM SYSTEM FLEXIBILITY.

Both Basic and Assembly Language Programming examples are included.

SOFTWARE:

SCL™ is now available! Our Sound Command Language makes writing Sound Effects programs a SNAP! SCL™ also includes routines for Register-Examine-Modify, Memory-Examine-Modify, and Play-Memory. SCL™ is available on CP/M* compatible diskette or 2708 or 2716. Diskette - **$24.95** 2708 - **$19.95** 2716 - **$29.95.** Diskette includes the source. EPROM'S are ORG at E000H.

SPECIAL PURCHASE!

UART SALE!

TR1602B — SAME AS TMS6011, AY5-1013, ETC. 40 PIN DIP

TR1602B

$2.95 EACH **4 For $10.00**

CRT CONTROLLER CHIP

SMC #CRT 5037. PROGRAMMABLE FOR 80 x 24, ETC. VERY RARE SURPLUS FIND. WITH PIN OUT. $12.95 EACH.

4K STATIC RAM

National Semi. MM5257. Arranged 4K x 1. +5V, 18 PIN DIP. A Lower Power, Plug in Replacement for TMS 4044. 450 NS. Several Boards on the Market Will Accept These Rams. SUPER SURPLUS PURCHASE! **PRIME NEW UNITS!**

8 FOR $16 32 FOR $59.95

NEW! G.I. COMPUTER SOUND CHIP

AY3-8910. As featured in July, 1979 BYTE! A fantastically powerful Sound & Music Generator. Perfect for use with any 8 Bit Microprocessor. Contains: 3 Tone Channels, Noise Generator, 3 Channels of Amplitude Control. 16 bit Envelope Period Control, 2-8 Bit Parallel I/O. 3 D to A Converters, plus much more! All in one 40 Pin DIP. Super easy interface to the S-100 or other busses. ~~$14.95~~ **$11.95** PRICE CUT!

SPECIAL OFFER: ~~$14.95~~ each Add $3 for 60 page Data Manual.

Digital Research Computers
(OF TEXAS)

P.O. BOX 401565 • GARLAND, TEXAS 75040 • (214) 271-3538

TERMS: Add $2.00 postage. We pay balance. Orders under $15 add 75¢ handling. No C.O.D. We accept Visa and MasterCharge. Tex. Res. add 5% Tax. Foreign orders (except Canada) add 20% P & H. Orders over $50, add 85¢ for insurance.

*TRADEMARK OF DIGITAL RESEARCH.

WE ARE NOT ASSOCIATED WITH DIGITAL RESEARCH OF CALIFORNIA, THE SUPPLIERS OF CPM SOFTWARE.

NEW!

"THE BIG BOARD"


OEM - INDUSTRIAL - BUSINESS - SCIENTIFIC

SINGLE BOARD COMPUTER KIT!

Z-80 CPU! 64K RAM!

NEW!

PARTIALLY ASSEMBLED KITS
For All Sockets Installed
And Soldered Add $50.

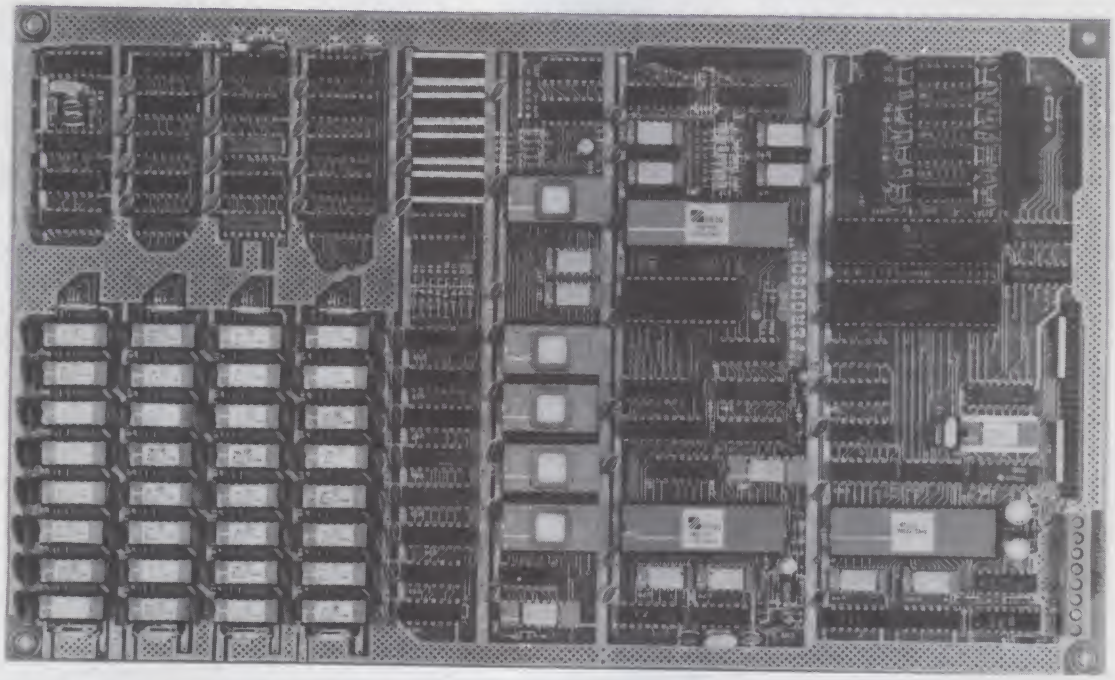

THE FERGUSON PROJECT: Three years in the works, and maybe too good to be true. A tribute to hard headed, no compromise, high performance, American engineering! The Big Board gives you all the most needed computing features on one board at a very reasonable cost. The Big Board was designed from scratch to run the latest version of CP/M*. Just imagine all the off-the-shelf software that can be run on the Big Board without any modifications needed! Take a Big Board, add a couple of 8 inch disc drives, power supply, an enclosure, C.R.T., and you have a total Business System for about 1/3 the cost you might expect to pay.

$649.00 ** (64K KIT BASIC i/0)

SIZE: 8½ x 13¾ iN.
SAME AS AN 8 iN. DRIVE.
REQUIRES: +5V @ 3 AMPS
+ - 12V @ .5 AMPS.

FULLY SOCKETED!

FEATURES: (Remember, all this on one board!)

64K RAM

Uses Industry standard 4116 RAM'S. All 64K is available to the user, our VIDEO and EPROM sections do not make holes in system RAM. Also, very special care was taken in the RAM array PC layout to eliminate potential noise and glitches.

Z-80 CPU

Running at 2.5 MHZ. Handles all 4116 RAM refresh and supports Mode 2 INTERUPTS. Fully buffered and runs 8080 software.

SERIAL I/O (OPTIONAL)

Full 2 channels using the Z80 SIO and the SMC 8116 Baud Rate Generator. FULL RS232. For synchronous or asynchronous communication. In synchronous mode, the clocks can be transmitted or received by a modem. Both channels can be set up for either data-communication or data-terminals. Supports mode 2 Int. Price for all parts and connectors: $85.

BASIC I/O

Consists of a separate parallel port (Z80 PIO) for use with an ASCII encoded keyboard for input. Output would be on the 80 x 24 Video Display.

24 x 80 CHARACTER VIDEO

With a crisp, flicker-free display that looks extremely sharp even on small monitors. Hardware scroll and full cursor control. Composite video or split video and sync. Character set is supplied on a 2716 style ROM, making customized fonts easy. Sync pulses can be any desired length or polarity. Video may be inverted or true. 5 x 7 Matrix - Upper & Lower Case

FLOPPY DISC CONTROLLER

Uses WD1771 controller chip with a TTL Data Separator for enhanced reliability. IBM 3740 compatible. Supports up to four 8 inch disc drives. Directly compatible with standard Shugart drives such as the SA800 or SA801. Drives can be configured for remote AC off-on. Runs CP/M* 2.2.

TWO PORT PARALLEL I/O (OPTIONAL)

Uses Z-80 PIO. Full 16 bits, fully buffered, bi-directional. User selectable hand shake polarity. Set of all parts and connectors for parallel I/O: $29.95

REAL TIME CLOCK (OPTIONAL)

Uses Z-80 CTC. Can be configured as a Counter on Real Time Clock. Set of all parts: $14.95

SYSTEM COMPARISON

64K RAM KIT	$370.00
80 x 24 Video Kit	365.00
Floppy Disk Controller Kit	235.00
Z-80 CPU Kit	185.95
SER & PAR. I/O	129.95
S-100 Mother Board	45.00
SUB TOTAL	$1330.90

Talk about bangs per buck! The prices shown for S100 kits were taken from the July 1980 BYTE. This will give some basis for comparison between the Big Board and a similar system impiementation on the S100 Buss.

CP/M* 2.2 FOR BIG BOARD

The popular CP/M* D.O.S. modified by MICRONIX SYSTEMS to run on Big Board is available for $150.00.

PC BOARD

Blank PC Board with Rom Set and Full Documentation.
$199.00

PFM 3.0 2K SYSTEM MONITOR

The real power of the Big Board lies in its PFM 3.0 on board monitor. PFM commands include: Dump Memory, Boot CP/M*, Copy, Examine, Fill Memory, Test Memory, Go To, Read and Write I/O Ports, Disc Read (Drive, Track, Sector), and Search. PFM occupies one of the four 2716 EPROM locations provided.

Z-80 is a Trademark of Zilog.

Digital Research Computers
(OF TEXAS)
P.O. BOX 401565 • GARLAND, TEXAS 75040 • (214) 271-3538

TERMS: Shipments will be made approximately 3 to 6 weeks after we receive your order. VISA, MC, cash accepted. We will accept COD's (for the Big Board only) with a $75 deposit. Balance UPS COD. Add $3.00 shipping.

*TRADEMARK OF DIGITAL RESEARCH. NOT ASSOCIATED WITH DIGITAL RESEARCH OF CALIFORNIA, THE ORIGINATORS OF CPM SOFTWARE
**1 TO 4 PIECE DOMESTIC USA PRICE.

U.K. AND EUROPE: CONTACT MACLIN-ZAND LTD. 38 MOUNT PLEASANT — LONDON WCIX OAP


CSC Logic Probe Kit.



$17.95

Complete, easy-to-follow instructions help make this a one-night project.

BUY 5 FOR $16.15 each



$124.95

apple clock/calendar

- Seconds, minutes, hours, day-of-week, month, days, years
- On-board batteries with one year life
- Uses MSM5832 crystal controlled

APPLE CARDS

SERIAL CARD	$159.00
PARALLEL CARD	$99.00
INTEGER or APPLESOFT CARD	$189.00
PASCAL SYSTEM	$425.00
PROTO BOARD	$25.00

"APPLE II Plus"



48k – $1199.00
64k – $1399.00

W/PURCHASE OF APPLE RECEIVE SPECIAL PRICING:

BASE II PRINTER	$619.00
DISK II w/cont.	$595.00
DISK II w/o cont.	$495.00
SUP'R'MOD II	$23.00
MONITOR: B&W 12" – 12MHz.	$125.00
INTEGER BASIC CARD	$159.00

"LS" Super SALE

74LS00	.26	74LS155	1.15	74LS54	.35	74LS243	1.45
74LS02	.26	74LS158	.75	74LS74	.38	74LS244	1.45
74LS03	.26	74LS160	.95	74LS75	.60	74LS245	2.25
74LS04	.26	74LS161	.85	74LS83	.44	74LS253	.95
74LS08	.28	74LS162	.95	74LS85	.95	74LS257	.95
74LS09	.26	74LS163	1.60	74LS86	.95	74LS258	.95
74LS10	.26	74LS164	.65	74LS90	.69	74LS259	2.85
74LS20	.26	74LS165	.65	74LS93	.69	74LS279	.44
74LS21	.28	74LS170	1.75	74LS107	.45	74LS283	1.00
74LS22	.26	74LS174	.75	74LS112	.38	74LS293	1.85
74LS26	.49	74LS175	.75	74LS113	.48	74LS298	1.20
74LS27	.28	74LS190	.75	74LS122	.48	74LS366	.95
74LS30	.26	74LS193	.95	74LS123	.95	74LS367	.55
74LS32	.32	74LS195	.95	74LS126	.69	74LS368	.55
74LS38	.32	74LS196	.85	74LS138	.69	74LS373	1.39
74LS42	.65	74LS221	1.40	74LS151	.44	74LS374	1.39
74LS48	.78	74LS240	1.65	74LS153	.44	74LS386	.65
74LS51	.25	74LS241	1.65				



TO-3 case
5 AMPS
5 VOLTS

EPSON MX-80

$560.00

MSM5832 MICROPROCESSOR REAL-TIME CLOCK/CALENDAR

XTAL $3.85


GENERAL DESCRIPTION

FEATURES

- Microprocessor bus oriented
- TIME MONTH DATE YEAR DAY OF WEEK
- 4 BIT DATA BUS
- 4 BIT ADDRESS
- Read/Write Hold Chip select inputs
- Interrupt signal outputs – 1024 1 1 60 1 3600 Hz
- 32.768 kHz crystal controlled operation
- Leap year register bit
- 12 or 24 hour format
- 30 sec. and error correction
- Single 5 volt power supply
- Back up battery operation to VCC 2.2 V
- Low Power Dissipation
  90 µa Max. at VCC 3 V
  2.5 ma Max. at VCC 5 V
- High Density 300 mil 18 Pin Package

$7.45

video 100



$1290.00

Leedex Corp.
12" BLACK & WHITE LOW COST VIDEO MONITOR

COLOR




$365.00 13"

Green Phos 12 inch.
$155.00

SOROC



IQ120 $689.00



No "Glitches", Surges Or Interference

$79.50

Global Specialties

Logic Probes



LP1 $40



LP3 $60

2716	5V 450NS	8.50ea	8 for 7.50ea
2708	450NS	4.75ea	8 for 4.50ea
2732		25.50ea	4 for 21.50ea
4116	300NS	3.00ea	8 for 19.50
	200NS	3.75ea	8 for 24.50
2114L	300NS	3.65 ea	4 for 13.95
	200NS	4.00ea	4 for 14.95

CPUs

Z-80	8.95
Z-80A CTC	12.50
Z-80A CPU	12.50
Z-80 002 16-64K	129.00
8085A	11.50
2901A	12.50
MC6800	9.50

MODEL 8000



IMPACT PRINTER

- Dot resolution graphics in six densities
- 1920 character buffer
- Fully adjustable tractors to 9-1/2"

$649.00

base 2 inc.

JUNIOR ENCLOSURES

Six SIZES

Attractive grain finish high impact ABS thermoplastic enclosures. Molded in card guides & mounting bosses provide maximum versatility. Supplied with assembly hardware

NEW

ENCLOSURES

PART NUMBER	DIMENSIONS X	Y	Z	PRICE
110	1.25	2.07	2.77	$2.85
120	1.50	2.65	3.75	3.51
130	1.50	3.25	4.38	3.84
133	2.00	3.25	4.38	4.29
140	1.50	4.00	5.30	4.72
144	2.00	4.00	5.30	5.16

IC SOCKETS

8 PIN	10/1.20
14	10/1.40
16	10/1.60
18	10/1.90
20	10/2.80
22	10/2.80
24	10/2.80
28	10/3.80
40	10/4.75

MICROSOFT 16K RAM CARD

$159.95

S-100 MEMORY BOARD

16K STATIC RAM



FULLY STATIC OPERATION
4K BANK ADDRESSABLE
EXTENDED MEMORY MGMT
MEETS IEEE PROPOSED S-100 SIGNAL STANDARDS
4 MHZ OPERATION

ASSEMBLED & TESTED $269.

California Computer Systems

SUPER SALE !!

New for the APPLE


Apple Expansion Kit

16K Memory Add-On
Includes Instructions
$25.95

TRS80

16K Add-On Instructions & Dip Switches
$25.95

ATARI® 800™ COMPUTER SYSTEM



400 Computer 8K – $419.00
800 Computer 16K – $779.00
800 COMPUTER w/48K – $989.00

Best Buy

ATARI PERIPHERALS:

Printer("825")	$775.00	Printer("822")	$379.00
Recorder	$65.00	Disk Drive	$565.00
Interface(850)	$175.00	Modem	$169.00
Paddles	$17.00	Joysticks	$17.00
Star Raiders	$49.00	Assembler Editor	$49.00
Space Invaders	$17.00	Music Composer	$49.00
Chess	$32.00	Mailing List	$17.00
Kingdom	$12.00	TV Switch Box	$8.95
Hangman	$12.00	16K RAM	$155.00
Blackjack	$12.00	8K RAM	$119.00

VISICALC

APPLE – 129.
ATARI – 154.

"1981" I.C. Master

$59.95

MB8264-20 64K RAM w/SPEED – $29.50
ER2051 EAROM – $4.50
P8155 – $19.50

"ALLOW 2 WKS. DEL'Y IF PERSONAL CHECK IS SENT."

MISC.

2102 450NS	1.20
8038	2.95
NE555	.27
AY5-1013A	4.50
1488	1.25
1489	1.25
8T26	1.30
8T28	1.30
8212	2.95
8216	2.95
IS410SCR	.95
IT410TRIAC	.95
7905	.85
7908	.85
7915	.85
7918	.85
7805	.85
7806	.85
7808	.85
7812	.85
MC1330A1P	1.60
MC1350P	1.15
MC1358P	1.50
LM380	1.20
LM565N	.95
LM741	.25
MC1458P	.55
LM720	.30

CONCORD COMPUTER PRODUCTS


297

1971 SO. STATE COLLEGE
ANAHEIM, CALIF. 92806
(714) 937-0637
CHECK – M/O
NO COD

VISA

☆send $1.00 for "81" catalog☆

$10. MIN ORDER/CA. RES. ADD 6% F.R.T.



$145.00 $155.00

Description
The RS-232C Compatible Digital Transfer Switch is designed to switch modems between front end processors. All 24 pins of the connector are switched with Pin 1 wired to ground

T-bar INCORPORATED

WAMECO

THE COMPLETE PC BOARD HOUSE
EVERYTHING FOR THE S-100 BUSS

* **CPU-2** Z80 PROCESSOR BOARD ON BOARD ROM AND HARDWARE POWER ON JUMP.
  PCBD ..... $35.95 KIT $135.95

* **MEM-3** 24 ADDRESS LINES EXPANDABLE IN 1K INCR. ADDRESSABLE IN 8K BLOCKS. BIDIRECTIONAL BUSSING.
  PCBD ..... $ 42.95 KIT LESS RAM $119.95
  KIT WITH 2114L-4 $475.95 KIT WITH 2114L-2 $549.95
  A&T WITH 2114L-4 $505.95 A&T WITH 2114L-2 $579.95

* **FPB-1A** FRONT PANEL BOARD FOR 8080A AND Z80 SYSTEMS IMSAI COMPATIBLE.
  PCBD ..... $56.95 KIT $175.00

* **MEM-2** 16K RAM 2114's. ADDRESSABLE IN 4K BOUNDARIES.
  PCBD .... $33.95 KIT (LESS RAMS) $80.95

* **EPM-2** 16/32K ROM USES 2716 OR 2708. ADDRESSABLE IN 4K BOUNDARIES.
  PCBD .... $33.95 KIT (LESS ROMS) $74.95

* **CPU-1** 8080A PROCESSOR BOARD WITH VECTOR INTERRUPT.
  PCBD ..... $33.95 KIT $124.95

* **QMB-12** 13 SLOT MOTHER BOARD.
  PCBD ..... $42.95 KIT $125.95

* **QMB-9** 9 SLOT MOTHER BOARD.
  PCBD ..... $35.95 KIT $109.95

* **PTB-1** POWER SUPPLY AND TERMINATOR BOARD.
  PCBD ..... $29.95 KIT $49.95

* **RTC-1** REAL TIME CLOCK BOARD WITH TWO INTERRUPTS.
  PCBD ..... $29.95 KIT $79.95

* **MEM-1A** 8K RAM, USES 2102's.
  PCBD .... $33.95 KIT (LESS RAM) $71.95

* **IOB-1** I/O BOARD. ONE SERIAL, TWO PARALLEL WITH CASSETTE. PCBD $33.95

* **FDC-1A** FLOPPY DISC CONTROLLER BOARD USES 1771. PCBD $45.95

FUTURE PRODUCTS: 80 CHARACTER VIDEO BOARD.
8 PARALLEL PORT I/O BOARD.

DEALER INQUIRIES INVITED, UNIVERSITY DISCOUNTS AVAILABLE AT YOUR LOCAL DEALER

wmc inc.

WAMECO, INC., P. O. BOX 877 • EL GRANADA, CA 94018 • (415) 728-9114

CALIFORNIA COMPUTER SYSTEMS

32K RAM BOARD A&T.
450 NSEC .....$579.95, 200 NSEC $629.95
16K RAM A&T.
450 NSEC .....$255.95, 200 NSEC $285.95
64K DYNAMIC A&T.
200 NSEC $548.95
Z80 PROCESSOR A&T. $259.00
DISC CONTROLLER $339.95
APPLE IEEE INSTRUMENTATION INTERFACE KIT 7490. A & T $275.00
ARITHMETIC PROCESSOR FOR APPLE 7811A. A & T $342.80
APPLE ASYNCHRONOUS SERIAL INTERFACE 7710A. A & T $137.10
APPLE SYNCHRONOUS SERIAL INTERFACE 7712A. A & T $153.95
ALL OTHER CCS PRODUCTS AVAILABLE

SSM

PB-1 2708 & 2716 Programming Board with provisions for 4K or 8K EPROM. No external supplies required. Textool sockets. Kit $143.00
CB-1A 8080 Processor Board. 2K of PROM 256 BYTE RAM power on/rest Vector Jump Parallel port with status. Kit ..... $146.00 PCBD $31.95
VB-3 80x24 VIDEO BOARD. Graphics included 4MHZ. Kit $379.95
IO-4 Two serial I/O ports with full handshaking 20/60 ma current loop: Two parallel I/O ports. Kit ..... $168.00 PCBD $31.95
VB-1C 64 x 16 video board, upper lower case Greek *composite and parallel video* with software, S-100. Kit $143.00
CB-2 Z80 CPU BOARD. Kit $199.95
AIO APPLE SERIAL/PARALLEL Kit $144.95
ALL OTHER SSM PRODUCTS AVAILABLE

wmc inc. WAMECO INC.

MEM-3 32K STATIC RAM 2114 24 bit addressing $36.95
FDC-1 FLOPPY CONTROLLER BOARD will drive shugart, pertek, remic 5" & 8" drives up to 8 drives, on board PROM with power boot up, will operate with CPM™ (not included). PCBD $43.95
FPB-1 Front Panel. IMSAI size, hex displays. Byte, or instruction single step. PCBD $48.50
QM-12 MOTHER BOARD, 13 slot, terminated, S-100 board only $39.95
CPU-1 8080A Processor board S-100 with 8 level vector interrupt. PCBD $28.95
CPU-2 Z80 Processor S-100, on board ROM, power on jump. PCBD $31.95
EPM-2 2708/2716 16K/32K EPROM CARD. PCBD $28.95
QM-9 MOTHER BOARD. Short Version of QM-12. 9 Slots. PCBD $33.95
MEM-1 8K x 8 RAM 2102. Buffered PCBD $31.95
PTB-1 POWER SUPPLY AND TERMINATOR BOARD. PCBD $28.95
IOB-1 SERIAL AND PARALLEL INTERFACE. 2 parallel, one serial and cassette. PCBD $28.95
2708 ..... $7.50 2114L 450 NSEC $4.99
2716 ..... $25.95 2114L 200 NSEC $5.99

MIKOS

MONDAY - FRIDAY: 8:00 TO 12:00, 1:00 TO 5:30
THURSDAYS 8:00 TO 9:00 P.M.
(415) 728-9121
P. O. Box 955 • El Granada, CA 94018
Please send for IC, Xistor and Computer parts list

JULY SPECIAL SALE ON PREPAID ORDERS
(Charge cards not included on this offer)

SSM IO2, PCBD $28.00
IO2, KIT $51.00
WAMECO MEM-1 WITH 250 NSEC LOW POWER RAM (NEC OR AMD).
A & T $99.99

MIKOS PARTS ASSORTMENT WITH WAMECO AND CYBERCOM PCBDS


MEM-3 less RAM ..... $ 95.95
CPU-1 with MIKOS #2 8080A CPU $99.95
QM-12 with MIKOS #4 13 slot mother board $110.95
CPU-2 with MIKOS #19 Z80 Processor $119.95
EPM-2 with MIKOS #11 16-32K EPROMS less EPROMS $65.95
QM-9 with MIKOS #12 9 slot mother board $99.95
FPB-1 with MIKOS #14 all parts for front panel $144.95

MIKOS PARTS ASSORTMENTS ARE ALL FACTORY MARKED PARTS. KITS INCLUDE ALL PARTS LISTED AS REQUIRED FOR THE COMPLETE KIT LESS PARTS LISTED. ALL SOCKETS INCLUDED

LARGE SELECTION OF LS TTL AVAILABLE
PURCHASE $50.00 WORTH OF LS TTL AND GET 10% CREDIT TOWARD ADDITIONAL PURCHASES.
PREPAID ORDERS ONLY

VISA or MASTERCHARGE. Send account number, interbank number, expiration date and sign your order. Approx. postage will be added. Check or money order will be sent post paid in U.S. If you are not a regular customer, please use charge, cashier's check or postal money order. Otherwise there will be a two-week delay for checks to clear. Calif. residents add 6% tax. Money back 30-day guarantee. We cannot accept returned IC's that have been soldered to. Prices subject to change without notice. **$10 minimum order. $1.50 service charge on orders less than $10.00.**

National Semiconductor Clock Modules



12VDC AUTOMOTIVE/ INSTRUMENT CLOCK

APPLICATIONS:
- In-dash autoclocks
- After-market auto/ RV clocks
- Aircraft-marine clks.
- 12VDC oper. instru.
- Portable/battery powered instrumnts.

Features: Bright 0.3" green display. Internal crystal time-base, ± 0.5 sec./day accur. Auto. display brightness control logic. Display color filterable to blue, blue-green, green & yellow. Complete – just add switches and lens.

MA1003 Module $16.95

CLOCK MODULES

MA1023	.7" Low Cost Digital LED Clock Module	8.95
MA1026	.7" Dig. LED Alarm Clock/Thermometer	18.95
MA5036	.3" Low Cost Digital LED Clock/Timer	6.95
MA1002	.5" LED Display Dig. Clock & Xformer	9.95

TRANSFORMERS

102-P20	Xformer for MA1023 Clock Modules	3.49
102-P22	Xformer for MA1026 Clock Modules	3.49
102-P20	Xformer for MA5036 Clock Modules	3.49

Transistor Checker

The *ASI Transistor Checker* is capable of checking a wide range of transistor types, either "in circuit" or out of circuit. It has been specially designed to take advantage of the newest concept of dynamic testing under current amplifier conditions. To operate, simply plug the transistor to be checked into the front panel socket, or connect it with the alligator clip test leads provided. No preliminary set-up is needed. The unit safely and automatically identifies low, medium and high power PNP and NPN transistors. The ASI Transistor Checker also permits matching similar transistors in actual operating circuits, and provides a reliable GO/NO-GO test at practical collector currents (from 5mA on small signal types to 50mA and more on power types.) Match similar type transistors by observing and comparing dial readings; the higher the reading, the higher the gain. Completely assembled – battery operated. ("C" cell battery not included.)



CLOSE-OUT

Trans-Check $9.95

EPROM Erasing Lamp



- Erases 2708, 2716, 1702A, 5203Q, 5204Q, etc.
- Erases up to 4 chips within 20 minutes.
- Maintains constant exposure distance of one inch.
- Special conductive foam liner eliminates static build-up.
- Built-in safety lock to prevent UV exposure.
- Compact – only 7-5/8" x 2-7/8" x 2"
- Complete with holding tray for 4 chips.


UVS-11E $79.95

JOYSTICKS



JS-5K	5K Linear Taper Pots	$5.25
JS-100K	100K Linear Taper Pots	$4.95
JVC-40	40K (2) Video Controller in case	$5.95

6-Digit Clock Kit



- Bright .300 ht. comm. cathode display
- Uses MM5314 clock chip
- Switches for hours, minutes and hold modes
- Hrs. easily viewable to 20 ft.
- Simulated walnut case
- 115 VAC operation
- 12 or 24 hr. operation
- Incl. all components, case & wall transformer
- Size: 6¾" x 3-1/8" x 1¾"

JE701 ..... $19.95

NEW! JE215 Adjustable Dual Power Supply

General Description: The JE215 is a Dual Power Supply with independent adjustable positive and negative output voltages. A separate adjustment for each of the supplies provides the user unlimited applications for IC current voltage requirements. The supply can also be used as a general all-purpose variable power supply.



FEATURES:
- Adjustable regulated power supplies, pos. and neg. 1.2VDC to 15VDC.
- Power Output (each supply): 5VDC @ 500mA, 10VDC @ 750mA, 12VDC @ 500mA, and 15VDC @ 175mA.
- Two, 3 terminal adj. IC regulators with thermal overload protection.
- Heat sink regulator cooling
- LED "on" indicator
- Printed Board Construction
- 120VAC input
- Size: 3-1/2" w x 5-1/16" L x 2" H

JE215 Adj. Dual Power Supply Kit (as shown) . . $24.95

(Picture not shown but similar in construction to above)

JE200 Reg. Power Supply Kit (5VDC, 1 amp) . .	$14.95
JE205 Adapter Brd. (to JE200) ±5,±9 & ±12V.	$12.95
JE210 Var. Pwr. Sply. Kit, 5-15VDC, to 1.5amp.	$19.95

MICROPROCESSOR COMPONENTS

8080A/8080A SUPPORT DEVICES

INS8080A	CPU	6.50
DP8212	8-Bit Input/Output	3.25
DP8214	Priority Interrupt Control	5.95
DP8216	Bi-Directional Bus Driver	3.49
DP8224	Clock Generator/Driver	3.95
DP8226	Bus Driver	3.49
DP8228	System Controller/Bus Drivar	4.95
DP8238	System Controller	5.95
INS8243	I/O Expander for 48 Series	9.95
INS8250	Asynchronous Comm. Element	16.95
DP8251	Prog. Comm. I/O (USART)	7.95
DP8253	Prog. Interval Timer	14.95
DP8255	Prog. Peripheral I/O (PPI)	9.95
DP8257	Prog. DMA Control	19.95
DP8259	Prog. Interrupt Control	14.95
DP8275	Prog. CRT Controller	49.95
DP8279	Prog. Keyboard/Display Interface	19.95
DP8300	Octal Bus Receiver	6.95
DP8303	System Timing Element	6.95
DP8304	8-Bit Bi-Directional Receiver	3.95
DP8307	8-Bit Bi-Directional Receiver	3.95
DP8308	8-Bit Bi-Directional Receiver	3.95

6800/6800 SUPPORT DEVICES

MC6800	MPU	14.95
MC6802CP	MPU with Clock and RAM	19.95
MC6810API	128x8 Static RAM	4.95
MC6821	Peripheral inter. Adapt (MC6820)	7.49
MC6828	Priority Interrupt Controller	10.95
MC6830L8	1024x8-Bit ROM (MC68A30-8)	14.95
MC6850	Asynchronous Comm. Adapter	6.95
MC6852	Synchronous Serial Data Adapter	6.95
MC6860	0-600bps Digital MODEM	10.95
MC6862	2400bps Modulator	12.95
MC6880A	Quad 3-State Bus. Trans. (MC8T26)	2.25

MICROPROCESSOR CHIPS

Z80 (780C)	CPU (MK3880N) (2MHz)	13.95
Z80A (780-1)	CPU (MK3880N-4) (4MHz)	15.95
CDP1802	CPU	19.95
8650	MPU	16.95
IDM2901ADC	CPU–4-Bit Slice (Com. Temp. Grade)	19.95
MC6850Z	MPU w/Clock (65K Bytes Memory)	11.95
INS8035N-6	MPU–8-Bit (6MHz)	16.95
INS8039N-6	CPU–Sgl. Chip 8-Bit (128 bytes RAM)	19.95
INS8040N-6	CPU (256 Bytes RAM)	24.95
INS8070N	CPU–64 Bytes RAM	24.95
INS8073N	CPU w/Basic Micro interpreter	29.95
P8085	CPU	19.95
INS8900	CPU–16-Bit	29.95
TMS9900JL	MPU–16-Bit	49.95

SHIFT REGISTERS

MM500H	Dual 25-Bit Dynamic	.50
MM503H	Dual 50-Bit Dynamic	.50
MM506H	Dual 100-Bit Static	.50
MM510H	Dual 64-Bit Accumulator	.50
MM1402	256-Bit Dynamic	3.95
MM5013	1024-Bit Dynamic/Accumulator	1.95
MM5016H	500/512-Bit Dynemic	.89
MM5034N	Octal 80-Bit	9.95
MM5035N	Octal 80-Bit	9.95
2504V (1404A)	1024-Bit Dynamic	3.95
2518N	Hex 32-Bit Static	4.95
2522V	Dual 132-Bit Static	2.95
2524V	512-Bit Dynemic	.99
2525V	1024-Bit Dynamic	2.95
2527V	Dual 256-Bit Static	2.95
2528V	Dual 250-Bit Static	4.00
2529V	Dual 240-Bit Static	4.00
2532N	Quad 80-Bit Static	2.95
3341PC	Fifo (Dual 80)	6.95

DATA ACQUISITION

AF100-1CN	Universal Active Filter 2.5%	5.95
AF121-1CJ	Touch Tone Low Pass Filter	19.95
AF122-1CJ	Touch Tone Low Pass Filter	19.95
LM308AH	Super Gain Op Amp	1.00
LM334Z	Constant Current Source	1.30
LM335Z	Temperature Transducer	1.40
LF356N	JFET Input Op Amp	1.10
LF398N	Sample & Hold Amplifiers	3.95
LM399H	Temp. Comp. Prec. Ref. (.5ppm/C°)	4.95
ADC0804LCN	8-Bit A/D Converter (1 LSB)	4.95
DAC0806LCN	8-Bit D/A Converter (0.78% Lin.)	2.25

DATA ACQUISITION (CONTINUED)

ADC0809CCN	8-Bit A/D Converter (8-Ch. Multi.)	5.25
ADC0817CCN	8-Bit A/D Converter (16-Ch. Multi.)	10.95
DAC1000LCN	10-Bit D/A Conv. Micro. Comp. (0.05%)	13.95
DAC1006LCN	10-Bit D/A Conv. Micro. Comp. (0.20%)	8.95
DAC1020LCN	10-Bit D/A Converter (0.05% Lin.)	8.49
DAC1022LCN	10-Bit D/A Converter (0.20% Lin.)	5.95
DAC1222LCN	12-Bit D/A Converter (0.20% Lin.)	9.95
CD4051N	8-Channel Multiplexer	1.19
AY-5-1013	300K BAUD UART	5.95

RAM'S

1101	256x1 Static	1.49
1103	1024x1 Dynamic	.99
2101 (8101)	256x4 Static	3.95
2102	1024x1 Static	1.75
21L02	1024x1 Static	1.95
2111 (8111)	256x4 Static	3.95
2112	256x4 Static MOS	4.95
2114	1024x4 Static 450ns	5.95
2114L	1024x4 Static 450ns Low Power	6.95
2114-3	1024x4 Static 300ns	7.49
2114L-3	1024x4 Static 300ns Low Power	7.95
2117	16,384x1 Dynamic 150ns (housemarked)	4.95
4136N-4 (UPD416)	16K Dynamic 250ns (MM5290N-4)	3.95
4164	64K Dynamic 250ns	49.95
MM2147J	4096x1 Fast 70ns	19.95
5101	256x4 Static	7.95
MM5261	1024x1 Dynemic Fully Decoded	.99
MM5262	2K x1 Dynamic	.25
MM5280/2107	4096x1 Dynamic	4.95
MM5290N-2 (4116)	16K Dynamic 150ns (UPD416C-3)	5.25
MM5298J-3A	8K Dyn. 200ns (lower ½ of MM5290J)	4.95
MM5799NAA/N	Controller Oriented Processor	9.95
UPD414/MK4027	4K Dynamic 16-pin	4.95
TMS4044-45NL	4K Static	14.95
TMS4046	1024x4 Static	14.95

PROMS/EPROMS

1702A	2K UV Erasable PROM	5.95
2708	8K EPROM	5.95
TMS2716	16K EPROM (-5V, +5V, +12V)	19.95
2716 Intel (2516) TI	16K EPROM (Single +5V)	10.95
2732 Intel (2532) TI	32K EPROM	19.95
2758	8K EPROM (450ns) (Single +5V)	7.95
5203	2048 PROM	14.95
82S23 (74S188)	32x8 PROM (Open Collector)	4.95
82S115	4095 Bipolar PROM	19.95
82S123 (74S288)	32x8 Tri-State Bipolar PROM	4.95
82S185	8K PROM	29.95

ROM'S

2513 (2140)	Character Generator (Upper Case)	9.95
2513 (3021)	Character Generator (Lower Case)	9.95
2516N	Character Generator	10.95
MM5230N	2048-Bit Read Only Memory	1.95

NMOS READ ONLY MEMORIES

MCM66710P	128x9x7 ASCII Shifted w/Greek	13.50
MCM66740P	128x9x7 Math Symbol & Pictures	13.50
MCM66750P	128x9x7 Alpha. Control Char. Gen.	13.50

MICROPROCESSOR MANUALS

M-Z80	User Manual	7.50
M-CDP1802	User Manual	7.50
M-2650	User Manual	5.00

SPECIAL FUNCTION

DS0025CN	Dual MOS Clock Driver (5MZ)	3.50
DS0026CN	Dual MOS Clock Driver (5MZ)	1.95
INS1771N-1	Floppy Disc Controller	24.95
INS2651N	Communication Chip	19.95
MM58167N	Microprocessor Real Time Clock	8.95
MM58174N	Microprocessor Compatible Clock	11.95
COP402N	Microcontroller with 64-Digit RAM and Direct LED Drive	6.95
COP402MN	Microcontroller with 64-Digit RAM & Direct LED Drive w/N Buss int.	7.49
COP470N	32-Seg.VAC Fluor. Driver (28-pin pkg.)	3.25

TELEPHONE/KEYBOARD CHIPS

AY-5-9100	Push Button Telephone Dialer	14.95
AY-5-9200	Repertory Dialer	14.95
AY-5-9500	CMOS Clock Generator	4.95
AY-5-2376	Keyboard Encoder (88 keys)	11.95
HD0165-5	Keyboard Encoder (35 keys)	7.95
74C922	Keyboard Encoder (16 keys)	5.49
74C923	Keyboard Encoder (20 keys)	5.75
MM53190N	Push Button Pulse Dialer	7.95
MM57499N	95/144-Key Serial Keyboard Encoder	8.95

ELECTRONIC TOY MOTORS



Typical Power Source	Operating Voltage Range	TYPICAL CHARACTERISTICS							SMALL TORQUE
		NO LOAD			AT MAXIMUM EFFICIENCY				
		Voltage	Speed RPM	Current AMP	Speed RPM	Current AMP	Torque OZ. IN	Output W	Eff %	OZ. IN
DRY CELL	1.5 6.0	3.0	9,200	0.20	6,750	0.90	0.260	1.30	57.0	0.97

.937 O.D. X 1.201 Length

MABUCHI RE280 $.99 each . . .10/$7.50 . . .100/$50.00

DESIGNERS' SERIES
Blank Desk-Top Electronic Enclosures



CONSTRUCTION:

The "DTE" Blank Desk Top Electronic Enclosures are designed to blend and complement today's modern computer equipment and can be used in both industrial and home. The end pieces are precision molded with an internal slot (all around) to accept both top and bottom panels. The panels are then fastened to ¼" thick tabs inside the end pieces to provide maximum rigidity to the enclosure. For ease of equipment servicing, the rear/ bottom panel slides back on slotted tracks while the rest of the enclosure remains intact. Different panel widths may be used while maintaining a common profile outline. The molded end pieces can also be painted to match any panel color scheme.



Enclosure Model No.	Panel Width	PRICE
DTE-8	8.00"	$29.95
DTE-11	10.65"	$32.95
DTE-14	14.00"	$34.95

$10.00 Min. Order – U.S. Funds Only
Calif. Residents Add 6% Sales Tax
Postage – Add 5% plus $1 Insurance

Spec Sheets – 25¢
Send 52¢ Postage for your FREE 1981 JAMECO CATALOG

NEW 1981 CATALOG

Jameco ELECTRONICS


PHONE ORDERS WELCOME (415) 592-8097

MAIL ORDER ELECTRONICS – WORLDWIDE
1355 SHOREWAY ROAD, BELMONT, CA 94002
PRICES SUBJECT TO CHANGE

7/81

Bourns Potentiometer

3/4 Watt Single Turn
(TOP ADJUSTMENT)



Values: 500Ω 1K 2.5K 5K 10K 25K 50K 100K 250K 500K 5Meg

INDIVIDUAL PRICING:

1-49	50-99	100-999	1K-up
.19	.17	.15	.12

GB174 ..... $1.95/lot
(25 pieces all 11 asst. values)

To order: Specify Bourns 3355 – (Value desired)

AC and DC Wall Transformers



Ideal for use with clocks, games, power supplies or any other type of AC or DC application.

Part No.	Input	Output	Price
AC 250	117V/60Hz	12 VAC 250mA	$3.95
AC 500	117V/60Hz	12 VAC 500mA	$4.95
AC1000	117V/60Hz	12 VAC 1 amp	$5.95
AC1700	117V/60Hz	9 VAC 1.7 amp	$6.95
DV 9200	117V/60Hz	9 VDC 200mA	$3.25
DC 900	120V/60Hz	9 VDC 500mA	$3.95

CONNECTORS



DB25P	D-Subminiature Plug	$2.95
DB25S	D-Subminiature Socket	$3.50
DB51226	Cover for DB25P/S	$1.75
22/44SE	P.C. Edge (22/44 Pin)	$2.95
UG88/U	BNC Plug	$1.79
UG89/U	BNC Jack	$3.79
UG175/U	UHF Adapter	$ .49
SO239	UHF Panel Recp.	$1.29
PL258	UHF Adapter	$1.60
PL259	UHF Plug	$1.60
UG260/U	BNC Plug	$1.79
UG1094/U	BNC Bulkhead Recp.	$1.29

TRS-80 16K Conversion Kit

Expand your 4K TRS-80 System to 16K.
Kit comes complete with:
- ★ 8 ea. MM5290 (UPD416/4116) 16K Dyn. Rams (*NS)
- ★ Documentation for Conversion

TRS-16K2 *150NS $39.95
TRS-16K4 *250NS $29.95

JE610 ASCII Encoded Keyboard Kit



The JE610 ASCII Keyboard Kit can be interfaced into most any computer system. The kit comes complete with an industrial grade keyboard switch assembly (62-keys), IC's, sockets, connector, electronic components and a double-sided printed wiring board. The keyboard assembly requires +5V @ 150mA and –12V @ 10 mA for operation. Features: 60 keys generate the 126 characters, upper and lower case ASCII set. Fully buffered. Two user-define keys provided for custom applications. Caps lock for upper-case-only alpha characters. Utilizes a 2376 (40-pin) encoder read-only memory chip. Outputs directly compatible with TTL/DTL or MOS logic arrays. Easy interfacing with a 16-pin dip or 18-pin edge connector. Size: 3½"H x 14½"W x 8¾"D

JE610/DTE-AK (After assembled as pictured above) . . . **$124.95**

JE610 Kit	62-Key Keyboard, PC Board, & Components (no case)	$ 79.95
K62	62-Key Keyboard (Keyboard only) . . .	$ 34.95
DTE-AK	(case only – 3¼"Hx11"Wx8¾"D)	$ 49.95

NEW! **JE212 – Negative 12VDC Adapter Board Kit for JE610 ASCII KEYBOARD KIT**
Provides -12V DC from incoming 5V DC . . $9.95

JE600 Hexadecimal Encoder Kit

FULL 8-BIT LATCHED OUTPUT 19-KEY KEYBOARD



The JE600 Encoder Keyboard Kit provides two separate hexadecimal digits produced from sequential key entries to allow direct programming for 8-bit microprocessor or 8-bit memory circuits. Three additional keys are provided for user operations with one having a bistable output available. The outputs are latched and monitored with 9 LED readouts. Also included is a key entry strobe. Features: Full 8-bit latched output for microprocessor use. Three user-define keys with one being bistable operation. Debounce circuit provided for all 19 keys. 9 LED readouts to verify entries. Easy interfacing with standard 16-pin IC connector. Only +5VDC required for operation. Size: 3½"H x 8¼"W x 8¾"D

JE600/DTE-HK (After assembled as pictured above) **$99.95**

JE600 Kit	19-Key Hexadec. Keyboard, PC Board & Cmpnts. (no case) . .	$59.95
K19	19-Key Keyboard (Keyboard only)	$14.95
DTE-HK	(case only – 3½"Hx8¾"Wx8¾"D)	$44.95

7400

SN7400N	.25			SN74156N	.79
SN7401N	.20			SN74157N	.69
SN7402N	.25	SN7472N	.29	SN74160N	.89
SN7403N	.25	SN7473N	.35	SN74161N	.89
SN7404N	.25	SN7474N	.35	SN74162N	.89
SN7405N	.29	SN7475N	.49	SN74163N	.89
SN7406N	.35	SN7476N	.35	SN74164N	.89
SN7407N	.35	SN7479N	5.00	SN74165N	.89
SN7408N	.29	SN7480N	.50	SN74166N	1.25
SN7409N	.29	SN7482N	.99	SN74167N	2.79
SN7410N	.25	SN7483N	.69	SN74170N	1.95
SN7411N	.29	SN7485N	.89	SN74172N	4.95
SN7412N	.35	SN7486N	.35	SN74173N	1.39
SN7413N	.40	SN7489N	1.75	SN74174N	.99
SN7414N	.69	SN7490N	.49	SN74175N	.89
SN7416N	.29	SN7491N	.59	SN74176N	.79
SN7417N	.29	SN7492N	.45	SN74177N	.79
SN7420N	.25	SN7493N	.45	SN74179N	1.49
SN7421N	.29	SN7494N	.69	SN74180N	.79
SN7422N	.45	SN7495N	.69	SN74181N	2.25
SN7423N	.29	SN7496N	.69	SN74182N	.79
SN7425N	.29	SN7497N	3.00	SN74184N	2.49
SN7426N	.29	SN74100N	1.49	SN74185N	2.49
SN7427N	.25	SN74107N	.35	SN74190N	1.25
SN7428N	.49	SN74109N	.39	SN74191N	1.25
SN7430N	.25	SN74116N	1.95	SN74192N	.89
SN7432N	.29	SN74121N	.39	SN74193N	.89
SN7437N	.25	SN74122N	.55	SN74194N	.89
SN7438N	.40	SN74123N	.59	SN74195N	.69
SN7439N	.25	SN74125N	.49	SN74196N	.89
SN7440N	.20	SN74126N	.49	SN74197N	.89
SN7441N	.89	SN74132N	.75	SN74198N	1.49
SN7442N	.59	SN74136N	.75	SN74199N	1.49
SN7443N	1.10	SN74141N	.99	SN74221N	1.25
SN7444N	1.10	SN74142N	3.25	SN74251N	.99
SN7445N	.89	SN74143N	3.49	SN74276N	1.95
SN7446N	.79	SN74144N	3.49	SN74279N	.79
SN7447N	.69	SN74145N	.79	SN74283N	1.49
SN7448N	.79	SN74147N	1.95	SN74284N	3.95
SN7450N	.20	SN74148N	1.29	SN74285N	3.95
SN7451N	.20	SN74150N	1.25	SN74365N	.69
SN7453N	.20	SN74151N	.69	SN74366N	.69
SN7454N	.20	SN74152N	.69	SN74367N	.69
SN7459A	.25	SN74153N	.79	SN74368N	.69
SN7460N	.20	SN74154N	1.25	SN74390N	1.49
SN7470N	.29	SN74155N	.79	SN74393N	1.49

74LS

74LS00	.29			74LS192	1.15
74LS01	.29			74LS193	1.15
74LS02	.29	74LS92	.75	74LS194	1.15
74LS03	.29	74LS93	.75	74LS195	1.15
74LS04	.35	74LS95	.99	74LS197	1.19
74LS05	.35	74LS96	1.15	74LS221	1.19
74LS08	.29	74LS107	.45	74LS240	1.95
74LS09	.35	74LS109	.45	74LS241	1.95
74LS10	.29	74LS112	.45	74LS242	1.95
74LS11	.75	74LS113	.49	74LS243	1.95
74LS12	.35	74LS114	.49	74LS244	1.95
74LS13	.59	74LS122	.89	74LS245	2.95
74LS14	.99	74LS123	1.25	74LS247	1.19
74LS15	.35	74LS125	.89	74LS248	1.19
74LS20	.29	74LS126	.55	74LS249	1.19
74LS21	.35	74LS132	.99	74LS251	1.49
74LS22	.35	74LS133	.89	74LS253	.99
74LS26	.35	74LS136	.49	74LS257	.89
74LS27	.35	74LS138	.89	74LS258	.99
74LS28	.35	74LS139	.89	74LS260	.69
74LS30	.29	74LS151	.89	74LS266	.69
74LS32	.35	74LS153	.89	74LS273	1.95
74LS33	.59	74LS154	1.75	74LS279	.75
74LS37	.45	74LS155	1.19	74LS283	1.09
74LS38	.49	74LS156	1.19	74LS290	.99
74LS40	.35	74LS157	.89	74LS293	.99
74LS42	.89	74LS158	.99	74LS298	1.25
74LS47	.89	74LS160	1.15	74LS352	1.29
74LS48	1.15	74LS161	1.15	74LS353	1.29
74LS49	1.15	74LS162	1.15	74LS365	.75
74LS51	.29	74LS163	1.15	74LS366	.75
74LS54	.29	74LS164	1.25	74LS367	.75
74LS55	.29	74LS165	1.25	74LS368	.75
74LS73	.45	74LS168	1.19	74LS373	1.95
74LS74	.45	74LS169	1.19	74LS374	1.95
74LS75	.59	74LS170	2.49	74LS375	.89
74LS76	.45	74LS173	1.39	74LS386	.69
74LS78	.49	74LS174	.99	74LS393	2.49
74LS83	.89	74LS175	.99	74LS399	2.49
74LS85	1.25	74LS181	2.95	74LS670	2.49
74LS86	.45	74LS190	1.25	81LS95	1.95
74LS90	.59	74LS191	1.25	81LS97	1.95

74S

74S00	.50			74S243	3.25
74S02	.50			74S244	3.25
74S03	.50	74S124	2.49	74S251	1.45
74S04	.55	74S133	.55	74S253	1.45
74S05	.55	74S134	.69	74S257	1.35
74S08	.50	74S135	1.19	74S258	1.35
74S09	.50	74S136	1.75	74S260	.79
74S10	.50	74S138	1.35	74S280	2.95
74S11	.50	74S139	1.35	74S287	4.95
74S15	.50	74S140	1.15	74S288	4.95
74S20	.50	74S151	1.35	74S373	3.49
74S22	.50	74S153	1.35	74S374	3.49
74S30	.50	74S157	1.35	74S387	5.95
74S32	.55	74S158	1.35	74S471	19.95
74S38	.69	74S160	1.95	74S472	19.95
74S40	.55	74S174	1.59	74S473	19.95
74S51	.50	74S175	1.59	74S474	21.95
74S64	.50	74S188	4.95	74S475	21.95
74S65	.50	74S194	1.95	74S570	7.95
74S74	.79	74S195	1.95	74S571	7.95
74S86	.79	74S196	3.95	74S572	19.95
74S112	.79	74S240	2.95	74S573	19.95
74S113	.79	74S241	2.95	74S940	3.15
74S114	.79	74S242	3.25	74S941	3.15

CA—LINEAR

CA3010H	1.07			CA3089N	3.75
CA3013H	2.15	CA3060N	3.25	CA3096N	3.95
CA3023H	3.25	CA3080H	1.25	CA3130H	1.39
CA3035H	2.48	CA3081N	2.00	CA3140H	1.25
CA3039H	1.35	CA3082N	2.00	CA3160H	1.25
CA3046N	1.30	CA3083N	1.60	CA3401N	.59
CA3059N	3.25	CA3086N	.85	CA3600N	3.50

CD—CMOS

CD4000	.39			CD 4098	2.49
CD4001	.39			CD4506	.75
CD4002	.39			CD4507	.99
CD4006	1.19	CD4041	1.49	CD4508	3.95
CD4007	.25	CD4042	.99	CD4510	1.39
CD4009	.49	CD4043	.89	CD4511	1.29
CD4010	.49	CD4044	.89	CD4512	1.49
CD4011	.39	CD4046	1.79	CD4514	3.95
CD4012	.25	CD4047	2.50	CD4515	2.95
CD4013	.49	CD4048	1.35	CD4516	1.49
CD4014	1.39	CD4049	.49	CD4518	1.79
CD4015	1.19	CD4050	.69	CD4519	.89
CD4016	.59	CD4051	1.19	CD4520	1.29
CD4017	1.19	CD4052	1.19	CD4526	1.79
CD4018	.99	CD4053	1.19	CD4528	1.79
CD4019	.49	CD4056	2.95	CD4529	1.95
CD4020	1.19	CD4059	9.95	CD4543	2.79
CD4021	1.39	CD4060	1.49	CD4562	11.95
CD4022	1.19	CD4066	.79	CD4566	2.79
CD4023	.29	CD4068	.39	CD4583	2.49
CD4024	.79	CD4069	.45	CD4584	.75
CD4025	.23	CD4070	.55	CD4723	1.95
CD4026	2.95	CD4071	.49	CD4724	1.95
CD4027	.69	CD4072	.49	MC14409	14.95
CD4028	.89	CD4073	.39	MC14410	14.95
CD4029	1.49	CD4075	.39	MC14411	14.95
CD4030	.49	CD4076	1.39	MC14412	11.95
CD4034	3.49	CD4078	.55	MC14419	4.95
CD4035	.99	CD4081	.39	MC14433	13.95
CD4040	1.49	CD4082	.39	MC14538	2.49
		CD4093	.99	MC14541	1.95

A P PRODUCTS

DIP JUMPERS



- Mate with Standard IC Sockets
- Fully Assembled and Tested
- Integral Molded-On Strain Relief
- Line-By-Line Probeability

Dip Jumpers are used for jumpering within a PC Board; interconnecting between PC Boards, backplanes and mother boards; and interfacing input/output signals.

Part Number	No of contacts	Description	Wire Length	Price
924102 12	14	single end	12	$1 51
924102 24	14	single end	24	1 92
924102 36	14	single end	36	2 33
924106 12	14	double end	12	2 61
924106 24	14	double end	24"	3 02
924106 36	14	double end	36	3 43
924112 12	16	single end	12	1 67
924112 24	16	single end	24"	2 13
924112 36	16	single end	36"	2 59
924116 12	16	double end	12	2 88
924116 24	16	double end	24	3 34
924116 36	16	double end	36	3 80
924122 12	24	single end	12"	2 60
924122 24	24	single end	24"	3 30
924122 36	24	single end	36	4 00
924126 12	24	double end	12"	4 50
924126 24	24	double end	24"	5 20
924126 36	24	double end	36"	5 90
924132 12	40	single end	12"	4 35
924132 24	40	single end	24	5 53
924132 36	40	single end	36	6 71

DISCRETE LEDS

XC556R	.200"	red	5/$1	MV50	.085"	red	6/$1	XC111R	.190"	red	5/$1
XC556G	.200"	green	4/$1	XC209R	.125"	red	5/$1	XC111G	.190"	green	4/$1
XC556Y	.200"	yellow	4/$1	XC209G	.125"	green	4/$1	XC111Y	.190"	yellow	4/$1
XC556C	.200"	clear	4/$1	XC209Y	.125"	yellow	4/$1	XC111C	.190"	clear	4/$1
XC22R	.200"	red	5/$1	XC526R	.185"	red	5/$1				
XC22G	.200"	green	4/$1	XC526G	.185"	green	4/$1				
XC22Y	.200"	yellow	4/$1	XC526Y	.185"	yellow	4/$1				
MV10B	.170"	red	4/$1	XC526C	.185"	clear	4/$1				

XC556 RED LED, METAL MTG. HDW. 2-6" LEADS.
RL-2 . . $.39 ea. or 3/$1.00

DISPLAY LEDS

C.A. — Common Anode | C.C. — Common Cathode

Type	Polarity	Ht	Price	Type	Polarity	Ht	Price
MAN 1	C.A.—red	.270	2.95	DLG507	C.A.—green	.500	1.25
MAN 2	5x7 D.M.—red	.300	4.95	DL704	C.C.—red	.300	1.25
MAN 3	C.C.—red	.125	.25	DL707	C.A.—red	.300	1.25
MAN 52	C.A.—green	.300	1.25	DL728	C.C.—red	.500	1.49
MAN 54	C.C.—green	.300	1.25	DL741	C.A.—red	.600	1.25
MAN 71	C.A.—red	.300	.75	DL746	C.A.—red ± 1	.630	1.49
MAN 72	C.A.—red	.300	.75	DL747	C.A.—red	.600	1.49
MAN 74	C.C.—red	.300	1.25	DL750	C.C.—red	.600	1.49
MAN 82	C.A.—yellow	.300	.49	DLO847	C.A.—orange	.800	1.49
MAN 84	C.C.—yellow	.300	.99	DLO850	C.C.—orange	.800	1.49
MAN 3620	C.A.—orange	.300	.49	DL33B	C.C.—red	.110	.35
MAN 3630	C.A.—orange ± 1	.300	.99	FND358	C.C. ± 1	.357	.99
MAN 3640	C.C.—orange	.300	.99	FND359	C.C.	.357	.75
MAN 4610	C.A.—orange	.400	.99	FND503	C.C. (FND500)	.500	.99
MAN 6610	C.A.—orange—DD	.560	.99	FND507	C.A. (FND510)	.500	.99
MAN 6630	C.A.—orange ± 1	.560	.99	HDSP-3401	C.A.—red	.800	1.50
MAN 6640	C.C.—orange—DD	.560	.99	HDSP-3403	C.C.—red	.800	1.50
MAN 6650	C.C.—orange ± 1	.560	.99	5082-7751	C.A.,R.H.D.—red	.430	1.25
MAN 6660	C.A.—orange	.560	.99	5082-7760	C.C.,R.H.D.—red	.430	1.75
MAN 6710	C.A.—red—DD	.560	.99	5082-7300	4x7 sgl. dig. RHD	.600	22.00
MAN 6750	C.C.—red ± 1	.560	.99	5082-7302	4x7 sgl. dig. LHD	.600	22.00
MAN 6780	C.C.—red	.560	.99	5082-7304	Overnge. char. (±1)	.600	19.95
DLO304	C.C.—orange	.300	1.25	4N28	Photo Xsistor Opto-Isol.		.99
DLO307	C.A.—orange	.300	1.25	LIT-1	Photo Xsistor Opto-Isol.		.69
DLG500	C.C.—green	.500	1.25	MOC3010	Optically Isol. Triac Driver		1.25

SOCKETS / RECEPTACLES

Test TEXTOOL Sockets



ZERO INSERTION FORCE

Sockets:
- Nickel Boron Plating
- G.F. PSF Plastic Body
- For testing IC's

Receptacles:
- Nickel Boron Plating
- G.F. PSF Plastic Body
- Wire Wrap Contacts

Part No.	Pins	Price	Part No.	Pins	Price	Part No.	Pins	Price	Part No.	Pins	Price
214-3339	14 pin	5.95	222-3343	22 pin	9.95	214-3592	14 pin	9.75	222-3596	22 pin	12.95
216-3340	16 pin	6.49	224-3344	24 pin	9.75	216-3593	16 pin	9.95	224-3597	24 pin	12.75
218-3341	18 pin	7.95	228-3345	28 pin	11.95	218-3594	18 pin	10.95	228-3598	28 pin	13.95
220-3342	20 pin	8.95	240-3346	40 pin	12.95	220-3595	20 pin	11.95	240-3599	40 pin	15.95

LOW PROFILE (TIN) SOCKETS

	1-24	25-49	50-100
8 pin LP	.17	.16	.15
14 pin LP	.20	.19	.18
16 pin LP	.22	.21	.20
18 pin LP	.29	.28	.27
20 pin LP	.34	.32	.30
22 pin LP	.37	.36	.35
24 pin LP	.38	.37	.36
28 pin LP	.45	.44	.43
36 pin LP	.60	.59	.58
40 pin LP	.63	.62	.61

SOLDERTAIL STANDARD (TIN)

	1-24	25-49	50-100
14 pin ST	.27	.25	.24
16 pin ST	.30	.27	.25
18 pin ST	.35	.32	.30
24 pin ST	.49	.45	.42
28 pin ST	.99	.90	.81
36 pin ST	1.39	1.26	1.15
40 pin ST	1.59	1.45	1.30

SOLDERTAIL (GOLD) STANDARD

	1-24	25-49	50-100
8 pin SG	.39	.35	.31
14 pin SG	.49	.45	.41
16 pin SG	.54	.49	.44
18 pin SG	.59	.53	.48
24 pin SG	.79	.75	.69
28 pin SG	1.10	1.00	.90
36 pin SG	1.65	1.40	1.26
40 pin SG	1.75	1.59	1.45

WIRE WRAP SOCKETS (GOLD) LEVEL #3

	1-24	25-49	50-100
8 pin WW	.59	.54	.49
10 pin WW	.69	.63	.58
14 pin WW	.79	.73	.67
16 pin WW	.85	.77	.70
18 pin WW	.99	.90	.81
20 pin WW	1.19	1.08	.99
22 pin WW	1.49	1.35	1.23
24 pin WW	1.39	1.26	1.14
28 pin WW	.1.69	1.53	1.38
36 pin WW	2.19	1.99	1.79
40 pin WW	2.29	2.09	1.89

1/4 WATT RESISTOR ASSORTMENTS – 5%

ASST. 1	5ea.	10 Ohm / 27 Ohm	12 Ohm / 33 Ohm	15 Ohm / 39 Ohm	18 Ohm / 47 Ohm	22 Ohm / 56 Ohm	50pcs.	$1.95
ASST. 2	5ea.	68 Ohm / 180 Ohm	82 Ohm / 220 Ohm	100 Ohm / 270 Ohm	120 Ohm / 330 Ohm	150 Ohm / 390 Ohm	50pcs.	$1.95
ASST. 3	5ea.	470 Ohm / 1.2K	560 Ohm / 1.5K	680 Ohm / 1.8K	820 Ohm / 2.2K	1K / 2.7K	50pcs.	$1.95
ASST. 4	5ea.	3.3K / 8.2K	3.9K / 10K	4.7K / 12K	5.6K / 15K	6.8K / 18K	50pcs.	$1.95
ASST. 5	5ea.	22K / 56K	27K / 68K	33K / 82K	39K / 100K	47K / 120K	50pcs.	$1.95
ASST. 6	5ea.	150K / 390K	180K / 470K	220K / 560K	270K / 680K	330K / 820K	50pcs.	$1.95
ASST. 7	5ea.	1M / 2.7M	1.2M / 3.3M	1.5M / 3.9M	1.8M / 4.7M	2.2M / 5.6M	50pcs.	$1.95

ASST. 8R Includes Resistor Assts. 1-7 (350 pcs.) $10.95 ea.

$10.00 Min. Order — U.S. Funds Only
Calif. Residents Add 6% Sales Tax
Postage — Add 5% plus $1 Insurance

✓41

Spec Sheets — 25¢
Send 52¢ Postage for your
FREE 1981 JAMECO CATALOG

NEW 1981 CATALOG

Jameco ELECTRONICS

PHONE ORDERS WELCOME
(415) 592-8097

MAIL ORDER ELECTRONICS — WORLDWIDE
1355 SHOREWAY ROAD, BELMONT, CA 94002
7/81 PRICES SUBJECT TO CHANGE

INTERSIL

Part No.	Function	Price
7045IPI	CMOS Precision Timer	14.95
7045EV/Kit*	Stopwatch Chip, XTL	22.95
7106CPL	3½ Digit A/D (LCD Drive)	16.95
7106EV/Kit*	IC, Circuit Board, Display	34.95
7107CPL	3½ Digit A/D (LED Drive)	15.95
7107EV/Kit*	IC, Circuit Board, Display	28.95
7116CPL	3½ Digit A/D LCD Dis. HLD.	18.95
7117CPL	3½ Digit A/D LED Dis. HLD.	17.95
7201IDR	Low Battery Volt Indicator	2.25
7205IPG	CMOS LED Stopwatch/Timer	12.95
7205EV/Kit*	Stopwatch Chip, XTL	19.95
7206CJPE	Tone Generator	5.15
7205CEV/Kit*	Tone Generator Chip, XTL	9.95
7207AIPD	Oscillator Controller	6.50
7207AEV/Kit*	Freq. Counter Chip, XTL	11.10
7208IPI	Seven Decade Counter	17.95
7209IPA	Clock Generator	3.95
7215IPG	4 Func. CMOS Stopwatch CKT	13.95
7215EV/Kit*	4 Func. Stopwatch Chip, XTL	19.95
7216AIJI	8-Digit Univ. Counter C.A.	32.00
7216CIJI	8-Digit Freq. Counter C.A.	26.95
7216DIPI	8-Digit Freq. Counter C.C.	21.95
7217IJI	4-Digit LED Up/Down Counter	12.95
7218CIJI	8-Digit Univ. LED Drive	10.95
7224IPL	LCD 4½ Digit Up Counter DRI	11.25
7226AIJL	8-Digit Univ. Counter	31.95
7226AEV/Kit*	5 Function Counter Chip, XTL	74.95
7240IJE	CMOS Bin Prog. Timer/Counter	4.95
7242IJA	CMOS Divide-by-256 RC Timer	2.05
7250IJE	CMOS BCD Prog. Timer/Counter	6.00
7260IJE	CMOS BCD Prog. Timer/Counter	5.25
7555IPA	CMOS 555 Timer (8 pin)	1.45
7556IPD	CMOS 556 Timer (14 pin)	2.20
7611BCPA	CMOS Op Amp Comparator 5MV	2.25
7612BCPA	CMOS Op Amp Ext. Cmvr. 5MV	2.95
7621BCPA	CMOS Dual Op Amp Comp. 5MV	3.95
7631CCPE	CMOS Tri Op Amp Comp. 10MV	5.35
7641CCPD	CMOS Quad Op Amp Comp. 10MV	7.50
7642CCPD	CMOS Quad Op Amp Comp. 10MV	7.50
7660CPA	Voltage Converter	2.95
8038CCPD	Waveform Generator	4.95
8048CCPE	Monolithic Logarithmic Amp	21.60
8069CCQ	50ppm Band—GAP Volt Ref. Diode	2.50
8211CPA	Volt Ref/Indicator	2.50
8212CPA	Volt Ref/Indicator	2.50

74C

74C00	.39			74C195	1.59
74C02	.39			74C221	1.95
74C04	.39			74C240	2.25
74C08	.39	74C106	.75	74C244	2.25
74C10	.39	74C107	1.89	74C373	2.49
74C14	.75	74C151	2.95	74C374	2.59
74C20	.39	74C154	3.95	74C901	.89
74C30	.39	74C157	2.25	74C903	1.15
74C42	1.39	74C160	1.69	74C911	10.95
74C48	1.95	74C161	1.60	74C912	10.95
74C73	.79	74C162	1.49	74C915	1.69
74C74	.79	74C163	1.69	74C917	10.95
74C85	1.95	74C164	1.59	74C922	5.49
74C86	.99	74C173	1.39	74C923	5.75
74C89	6.95	74C174	1.39	74C925	7.50
74C90	1.29	74C175	1.39	74C926	7.50
74C93	1.29	74C192	1.69	80C95	.79
74C95	1.59	74C193	1.69	80C97	.79

LINEAR

LH0002CN	6.85			LM702H	.79
LM10CLH	4.50			LM703CN	.89
LM11CLH	4.75	LM340T-5	1.25	LM709N	.49
LH0070-OH	6.05	LM340T-12	1.25	LM710N	.79
TL071CP	.79	LM340T-15	1.25	LM711N	.79
TL072CP	1.39	LM341P-5	.75	LM723N	.69
TL074CN	2.49	LM341P-12	.75	LM733N/H	1.00
LH0082CD	35.80	LM341P-15	.75	LM739N	1.19
TL082CP	1.19	LM342P-5	.69	LM741CN	.35
TL084CN	2.19	LM342P-12	.69	MC1741SCG	3.00
LH0094CD	36.80	LM342P-15	.69	LM747N/H	.79
LM300H	.99	LM348N	1.25	LM748N/H	.59
LM301CN/H	.35	LM350K	5.75	LM1014N	2.75
LM302H	1.95	LF351N	.60	LM1310N	1.95
LM304H	1.95	LF353N	1.00	LM1458CN	.59
LM305H	.99	LF355N	1.10	LM1488N	1.25
LM307CN/H	.45	LF356N	1.10	LM1489N	1.25
LM308CN/H	1.00	LM358N	1.00	LM1496N	1.95
LM309H	1.95	LM359N	1.79	LM1556V	1.75
LM309K	1.25	LM370N	4.49	LM1800N	2.95
LM310CN	1.75	LM373N	3.25	LM1877N-9	3.25
LM311H/CN	.90	LM377N	2.95	LM1889N	3.20
LM312H	2.49	LM380N	1.25	LM1896N	1.75
LM317MP	1.15	LM381N	1.95	LM2002T	1.49
LM317T	1.75	LM382N	1.79	LM2877P	2.05
LM317K	3.95	LM384N	1.95	LM2878P	2.25
LM318CN/H	1.95	LM386N-3	1.29	LM2896P-1	2.25
LM319N	1.95	LM387N	1.45	LM3189N	2.95
LM320K-5	1.35	LM389N	1.35	LM3900N	.69
LM320K-12	1.35	LM392N	.69	LM3905CN	1.25
LM320K-15	1.35	LF398N	4.00	LM3909N	1.15
LM320T-5	1.25	LM399H	5.00	LM3914N	3.95
LM320T-12	1.25	TL494CN	4.49	LM3915N	3.95
LM320T-15	1.25	TL496CP	1.75	LM3916N	3.95
LM323K-5	5.95	NE510A	6.00	RC4136N	1.25
LM324N	.99	NE529A	4.95	RC4151NB	3.95
LM329DZ	.65	NE531H	3.95	RC4194TK	5.95
LM331N	3.95	NE536H	6.00	RC4195TK	5.49
LM334Z	1.30	NE540H	6.00	KB4428	4.25
LM335Z	1.40	NE544N	4.95	KB4429	5.95
LM336Z	1.75	NE550A	1.30	LM4500A	3.25
LM337T	1.95	NE555V	.39	ICL8038B	4.95
LM337MP	1.15	LM556N	.99	LM13080N	1.29
LM338K	6.95	NE564N	3.95	LM13600N	1.49
LM339N	.99	LM565N	1.25	75138N	1.95
LM340K-5	1.35	LM566CN	1.95	75450N	.89
LM340K-12	1.35	LM567V	1.25	75451CN	.39
LM340K-15	1.35	NE570N	4.95	75492	.89

CAPACITOR CORNER

50 VOLT CERAMIC DISC CAPACITORS

Value	1-9	10-99	100+	Value	1-9	10-99	100+
10 pf	.08	.06	.05	.001µF	.08	.06	.05
22 pf	.08	.06	.05	.0047µF	.08	.06	.05
47 pf	.08	.06	.05	.01µF	.08	.06	.05
100 pf	.08	.06	.05	.022µF	.09	.07	.06
220 pf	.08	.06	.05	.047µF	.09	.07	.06
470 pf	.08	.06	.05	.1µF	.15	.12	.10

100 VOLT MYLAR FILM CAPACITORS

.001mf	.12	.10	.07	.022mf	.13	.11	.08
.0022mf	.12	.10	.07	.047mf	.21	.17	.13
.0047mf	.12	.10	.07	.1mf	.27	.23	.17
.01mf	.12	.10	.07	.22mf	.33	.27	.22

+20% DIPPED TANTALUMS (Solid) CAPACITORS


.1/35V	.39	.34	.29	1.5/35V	.41	.37	.29
.15/35V	.39	.34	.29	2.2/35V	.51	.45	.34
.22/35V	.39	.34	.29	3.3/25V	.53	.47	.37
.33/35V	.39	.34	.29	4.7/25V	.63	.56	.45
.47/35V	.39	.34	.29	6.8/25V	.79	.69	.55
.68/35V	.39	.34	.29	15/25V	1.39	1.25	.95
1.0/35V	.39	.34	.29	22/6V	.79	.69	.55

MINI. ALUMINUM ELECTROLYTIC CAPACITORS

Axial	1-99	100-499	500+	Radial	1-99	100-499	500+
.47/50V	.16	.14	.10	.47/25V	.15	.13	.12
1.0/50V	.19	.16	.12	.47/50V	.16	.14	.13
3.3/50V	.17	.15	.11	1.0/16V	.15	.13	.12
4.7/25V	.18	.15	.11	1.0/25V	.16	.14	.13
10/25V	.18	.15	.11	1.0/50V	.17	.15	.14
10/50V	.19	.16	.12	4.7/16V	.15	.13	.12
22/25V	.19	.16	.12	4.7/25V	.16	.14	.13
22/50V	.24	.20	.18	4.7/50V	.17	.15	.14
47/25V	.25	.21	.19	10/16V	.15	.13	.12
47/50V	.29	.25	.23	10/25V	.16	.14	.13
100/25V	.28	.24	.22	10/50V	.17	.15	.14
100/50V	.41	.37	.34	47/50V	.25	.21	.19
220/25V	.39	.34	.33	100/16V	.21	.17	.14
220/50V	.49	.45	.41	100/25V	.25	.23	.21
470/25V	.54	.49	.45	100/50V	.37	.34	.31
1000/16V	.79	.69	.61	220/16V	.25	.21	.19
2200/16V	.89	.79	.69	470/25V	.35	.31	.27

✓See List of Advertisers on page 194

VAK-2 8K STATIC RAM BOARD
VAK-4 16K STATIC RAM BOARD

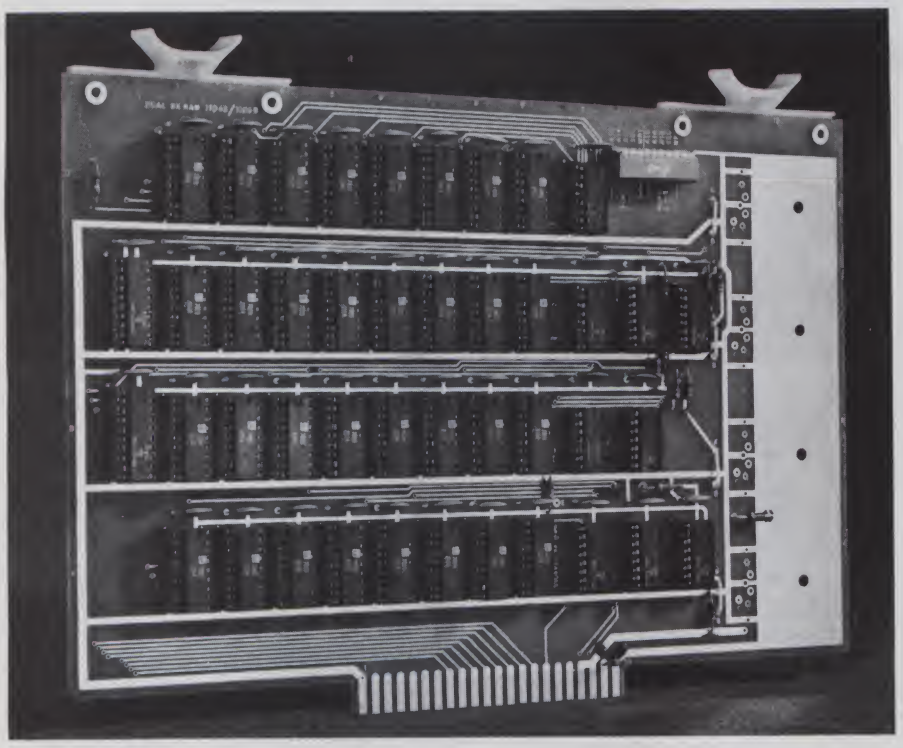

We also carry:
SYM-1 $229.00
AIM-65 w/1K $389.00
AIM-65 w/4K $439.00
We also do custom hardware and software for the 6502 microprocessor

SPECIAL PRICE:
VAK-4 $295.00
For prepaid orders only
Offer expires 7/30/81

PRICE:
VAK-4 ~~$325.00~~
VAK-2 $239.00
Add $4.50 for UPS
Shipment in continental U.S.
All others call or write for shipping charges

The VAK-2/4 was specifically designed for use with the KIM-1, SYM-1 and the AIM 65 Microcomputer Systems. The VAK-4, 16K Ram Board, consists of two (2) separate 8K blocks. Each block has it's own address, write protect and block enable switches.

The VAK-2, 8K Ram Board, is identical to the VAK-4 with sockets for all 16K of Ram, but it has only one of the 8K blocks populated with IC's. Therefore, the VAK-2 is user expandable to a full 16K with the purchase of the VAK-3 Expansion Kit.

Both the VAK-2 and the VAK-4 Boards are made with 1st quality, Industry Standard 450 *nsec.* 2114 RAM Chips. They plug directly into the VAK-1 Motherboard, or with addition of voltage regulators plug into the KIM-4* Motherboard.

SPECIFICATIONS:

- Completely assembled, tested and burned-in.
- All IC's are in sockets
- Fully buffered address and data bus
- Standard KIM-4* Bus (both electrical Pin-out and card size)
- Designed for use with a regulated Power Supply such as our VAK-EPS, but has provisions for adding regulators for use with an unregulated Power Supply.
- Each 8K Block Address is independent and switch selectable.
- Separate write-protect switch for each 8K block.
- Board size: 10 in. Wide x 7 in. High (including card-edge)
- Power requirements: VAK-2—5V.DC @ 1.2 AMPS.
  Power requirements: VAK-4—5V.DC @ 2.4 AMPS.

**KIM-4 is a product of MOS Technology/C.B.M.*


We have moved to a new, larger facility. Please make note of our new address.

RNB ENTERPRISES INCORPORATED ✓52

4030 N. 27th Avenue, Suite D
Phoenix, AZ 85017
(602) 265-7564

master charge VISA

64K STATIC

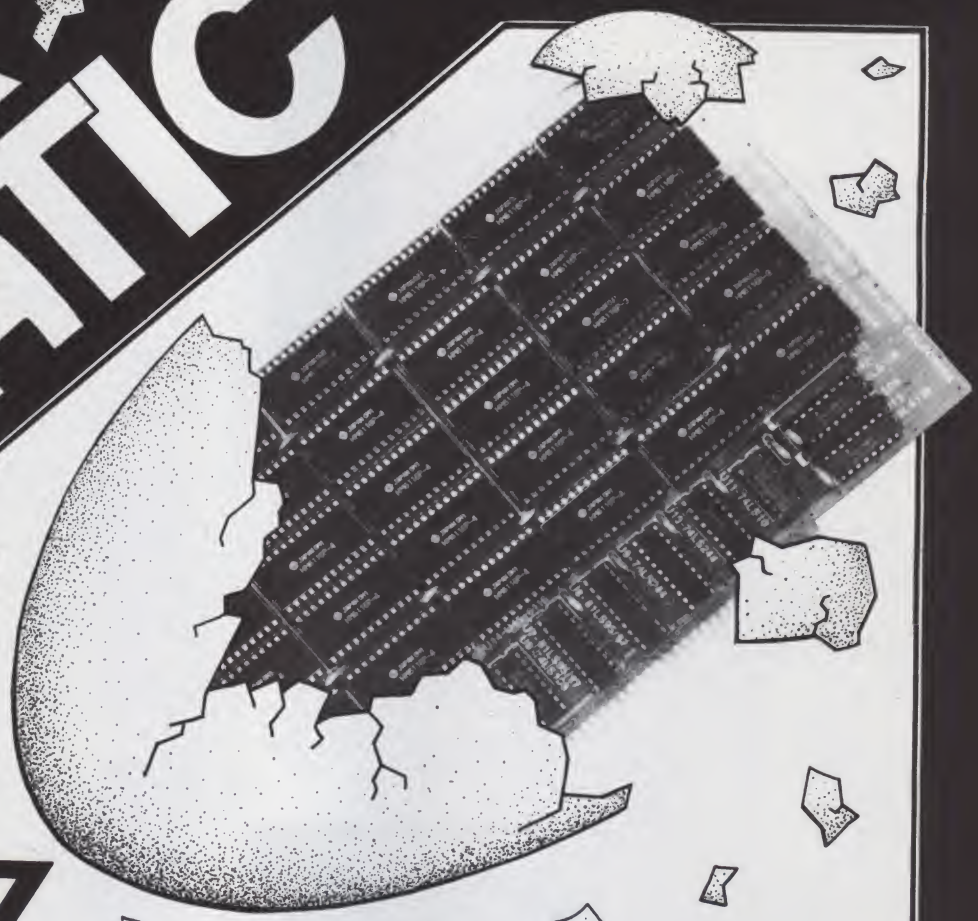

RAM 17 - the memory that took 18 months to hatch!

18 months ago, we designed **RAM 17** around a brand new 16K static RAM from Hitachi that not only had the reliability and speed of static memory, but also consumed less power than dynamics.

Unfortunately, pricing on this VLSI chip back then was such that we didn't feel **RAM 17** would meet our tough standards for cost-effectiveness. In the past few months, however, volume production has lowered chip prices to where **RAM 17** now represents an exceptional value in S-100 memory.

Features include a stunningly low 250 mA typical power consumption, guaranteed operation (no wait states) at 6 MHz with **CPU Z** and 10 MHz with **CPU 8085/8088**, full compliance with all IEEE 696/S-100 specifications (including 24 bit addressing and standard board size), four optional 2K windows to accommodate memory mapped disk controllers, pinout compatibility with 2716 EPROM (allows RAM/ROM mix on a single board), plus all the other features that make **CompuPro** memory the first choice of system designers world-wide.

$1595 CSC (2 year limited warranty), **$1395 A/T** (1 year limited warranty), **$1095 Unkit.**

These features may appear to be those of a dream memory of the future. . . but CompuPro is delivering RAM 17 now at finer computer stores near you.

CompuPro™ division of GODBOUT ELECTRONICS

BOX 2355, OAKLAND AIRPORT, CA 94614 (415) 562-0636

✓42

MEMBER MITA

PRINTERS

EPSON MX-80
Now in stock!
The MX-80 dot matrix printer. Unequalled Epson reliability. Has all the features of the MX-70 plus more power and extra functions.
CALL US

C-ITOH STARWRITER: LETTER QUALITY PRINTING FOR UNDER $2000!/This daisywheel printer gives high quality at a low price. 25 cps. Parallel and serial interfaces available. **CALL**

NEC SPINWRITER FROM THE FIRST NAME IN LETTER QUALITY PRINTERS/Compumart offers beautiful print quality with NEC Spinwriter Terminals. We carry all models from RO THRU KSR WITH NUMERIC KEYPAD—5510-5530. All versions give unsurpassed hard copy output! **CALL FOR PRICES**

NEW INTEGRAL DATA'S 560 PRINTER/All the exciting features of the 400 series plus 14 1/2" paper capacity. 132 col. graphics printer.
IDS 445. Priced lower than the 440 and equipped with a better print head. With & w/o graphics.
IDS 460. Features include correspondence quality printing, high resolution graphics.
CALL FOR PRICES



CENTRONICS PRINTERS
MODEL 737/The closest thing to letter quality print for under $1000. List $899. **SPECIAL $795.**
737-1 Parallel Interface **SALE PRICE $695.**

PLUS EXCITING REBATE OFFER ON CENTRONICS PRINTERS.

OMNI 810 PRINTER FROM TEXAS INSTRUMENTS **CALL US**
The 820 RO PACKAGE includes machine mounted paper tray and cable. A compressed print option and device forms control are standard features.
THE 820 KSR PACKAGE includes fully ASCII Keyboard plus all of the features of the RO.
CALL FOR PRICES

MONITORS TERMINALS

CLEARANCE ZENITH COLOR VIDEO MONITOR **$349.**

SUPER SELLING TERMINALS FROM LEAR SIGLER/We have the following Lear Siegler terminals in stock at prices too low to print! Call for quotes.

ADM-3A/Industry's favorite dumb terminal for some very smart reasons/
ADM-3A + NEW from Lear Siegler. CALL!
IT IS HERE! It is the new Intermediate Terminal from Lear Siegler.
CALL FOR DETAILS

SANYO MONITORS AT LOW COMPUMART PRICES/Sanyo's new line of CRT data display monitors are designed for the display of alphanumeric or graphic data.

9" SANYO B/W	**$169.**
12" SANYO B/W	**CALL**
12" SANYO W/ GREEN SCREEN	**CALL**
13" SANYO COLOR	**CALL**



NEC MONITOR/RECEIVER/
Composite video using BNC connectors, 8-Pin connector for VCR/VTR video loop In/Out and television reception. **CALL US!**

Visit our giant

ANN ARBOR STORE

1250 North Main Street
Ann Arbor, Michigan

FREE MICRO/DEC LS1-11 CATALOGS
Send for them!

CALCULATORS MISC

HP-41C CALCULATORS
MEMORY MODULES for storing programs of up to 2000 lines of program memory.
"EXTRA SMART" CARD READER. Records programs and data back onto blank magcards.
THE PRINTER. Upper and lower case. High resolution plotting. Portable thermal operation.
APPLICATION MODULES
CALL FOR PRICES ON ALL

NEW SUPER 41-CV SYSTEMS with Quad RAMS built-in. Maximum memory on-board leaves slots open for Application Pacs and peripherals.
+ CARD READER
+ CARD READER + PRINTER
QUAD RAMS equivalent to four Memory Modules all packed into one. **CALL ON ALL**

MATROX PRODUCTS/Compumart stocks the complete line.
CALL ON SPECS

DEC LS1-11/Compumart now offers the entire product line.
CALL FOR PRICES AND DELIVERY

NOVATION CAT ACOUSTIC MODEM Answer Originate. **CALL**
NEW! D-CAT Direct Connect Modem from Novation. **CALL**



NEW! GILTRONIX RS 232 SWITCH/
The ultimate in flexibility. You can connect three peripherals to one computer or three computers to one peripheral. Switches the eight most important RS 232 signals.
CALL ON PRICE

DYSAN DISKETTES/Single side, single density. Hard or Soft Sector **$5. ea.**

MEMOREX 3401's/5 1/4" disks **$3.25.**
/with hub ring for Apple **$3.50.**

MEMORY INTEGRATED CIRCUITS/
Call for quantity discounts when ordering over 50 units. **CALL**

MOTOROLA 4116 (200 Nanosecond Plastic) **$4.50**

SYSTEMS SOFTWARE

RM EXPANSION ACCESSORIES FOR AIM—
CALL SPECS AND PRICES

APPLE III IS IN STOCK/Apple III
Information Analyst Package—128K Apple III, Black and White Monitor 12", and information analyst software. **CALL**

TOP SOFTWARE PACKAGES FROM COMPUMART

VISICALC/FOR APPLE/FOR HP/FOR COMMODORE/FOR ATARI
SOFTWARE FROM APPLE/Apple Plot (the perfect graphic complement for Visicalc/Dow Jones News & Quotes/Apple Fortrom/Apple Writer/Pascal Language System/Controller Business System **CALL**
PERSONAL SOFTWARE/Visidex/VisiTrend/VisiPlot/VisiTerm **CALL**
MUSE/Super Text **CALL**



MOUNTAIN COMPUTER/
Expansion accessories for Apple/Super Talker/The Music System/ROM plus board with Keyboard filter/ROM Writer/Clock Calendar/AtoD and D to A Converter/Clock for Apple/CPS Multifunction Board **CALL**
VIDEX/Video Term (80 col. x 24 line, 7x9 Matrix plug in compatible board for Apple II) w/wo graphics EPROM/SSM Serial & Parallel, Apple Interface/ABT's Numeric Key Plan/California Microcomputer Keyboard **CALL**

IMPORTANT ORDERING INFORMATION
CALL. 800 343-5504, in Massachusetts (617) 491-2700, phones open from 8:30 a.m. to 7:00 p.m. Mon-Fri, 11:00 a.m. to 4:00 p.m. Sat.
PO's. Accepted from Dun & Bradstreet rated companies—shipment contingent upon receipts of signed purchase order.
SALE PRICES. Valid for month of magazine date only—all prices subject to change without notice. Our Ann Arbor retail store is open 11:00 a.m. to 7:00 p.m. Tues-Fri, 10:00 a.m. to 5:00 p.m. on Saturdays.

SYSTEMS APPLE II STARTER

$1895.

SAVE OVER $200 ON OUR BEST SELLING APPLE SYSTEM/ System includes a 48K Apple II, Apple Disk, DOS 3.3 and Controller and a Sup R MOD RF Modulator.
List $2209.

EXCLUSIVE FOR THE APPLE: Magic Wand, Videx, Z-80 softcard (Requires 48K Apple and disk).
COMPLETE SYSTEM $925.

SAVE $200 ON APPLE ACCESSORIES WITH PURCHASE OF AN APPLE II.

CHOOSE FROM: Silentype Printer w/x face/Light Pen/Easy Writer (80 col. need a Videx)/Clock for Apple.

FROM MICROSOFT: 16K RAM Board/FORTRAN.

FROM MOUNTAIN HARDWARE: Card Reader.

FROM COMPUTER STATION: Hi-Res Dump for 460 Printer.



OUR APPLE INVENTORY IS COMPLETE. WE'VE GOT IT ALL—
CALL US FOR PRICES

SYSTEMS COMMODORE WORD PRO

$4995.

CRISP LETTER QUALITY OUTPUT UNSURPASSED EASE OF OPERATION

This Compumart/Commodore system includes a **COMMODORE 8032 32K CPU,** a **4040 DUAL DISK,** a **C-ITOH PRINTER** and x/face and **WORD PRO 4 PLUS** (all cables included). List $5685.
CALL FOR DETAILS AND LOW PRICES

A COMPLETE SYSTEM: includes a **DUAL DISK DRIVE/TRACTOR PRINTER** and an **80 COLUMN 32K CPU.** No interfaces needed. Cables included. List $3985.
COMPUMART $3635.

SAVE $200 ON COMMODORE ACCESSORIES WITH PURCHASE OF A 32K PET—SAVE $100 WITH A 16K PET.

CHOOSE FROM: Visicalc/Word Pro 4/Wordcraft 80/Ozz the Information Wizzard/Tax Preparation Planner/Dow Jones Portfolio Mgmt System/Personal Tax Calculator/Assembler Development Package.



EDUCATORS TAKE NOTE: COMMODORE HAS EXTENDED ITS 3 FOR 2 DEAL UNTIL 6-30-81.

SYSTEMS HP 83 BASIC

$4249.

This Basic System from Hewlett-Packard includes **HP-83/ROM DRAWER/MASS STORAGE ROM/ 5¼" SINGLE MASTER FLEXIBLE DISK DRIVE/HP-1B INTERFACE MODULE/2 METER HP-1B CABLE.**

SAVE $400 ON HP-85 SERIES ACCESSORIES WITH THE PURCHASE OF AN HP-85.

CHOOSE FROM: PERIPHERALS; Disk Drives to Graphics Plotters ENHANCEMENTS; Basic Training/General Statistics/Financial Decision/Math/Linear Programming ($95 EA.) ACCESSORIES; Enhancement ROM's/ ROM drawer/Overhead Transparency Kit SUPPLIES; Plotter Pens/Tape Cartridges INTERFACE MODULES; HP-1B Interconnect Cables/Serial (RS-232C) Interface Module.



WE CARRY EVERY PERIPHERAL MADE FOR THE HP-85.
CALL US FOR PRICES

SYSTEMS AIM 65 STARTER

$795.

FROM ROCKWELL
Our **AIM** Starter System for Educational & Laboratory use includes **4K AIM/BASIC & ROM/ASSEMBLER & ROM/POWER SUPPLY EG1 ENCLOSURE/CRAIG TAPE RECORDER.**

We also carry RM Expansion Accessories for the Aim-65.

CALL FOR SPECS AND PRICES

ACCESSORIES FOR AIM STARTER: PL 65 High Level Language/Paper for the Aim (roll)/Rockwell's 4 slot Motherboard/

CALL



800-343-5504

IN MASS CALL 617-491-2700

Systems Customized / **COMPUMART** ✓43

65 Bent Street, Dept 127,
PO Box 568, Cambridge, MA 02139

From THE LEADER...

We just might be the largest independent small systems dealer in the country. Here's why:

COMPUMART has been serving the computer needs of industry since 1971.

We stock, for immediate shipment, only those products from the finest micro-computer manufacturers.


And any product, except software, can be returned within 10 days for a full refund—even if you just change your mind.

We also honor all manufacturers' warranties. Our expert technicians will service any product we sell that cannot be better, or faster, serviced by the manufacturer's local service center.

Call us for more information on products, product configuration and service. Our phones are open Monday thru Friday, 8:30 a.m. to 7:00 p.m. and Saturday 11:00 a.m. to 4:00 p.m.

We have a staff of highly knowledgeable sales people waiting to hear from you, and to help. Because service is what we're all about.

INTELLIGENT VIDEO I/O FOR S-100 BUS

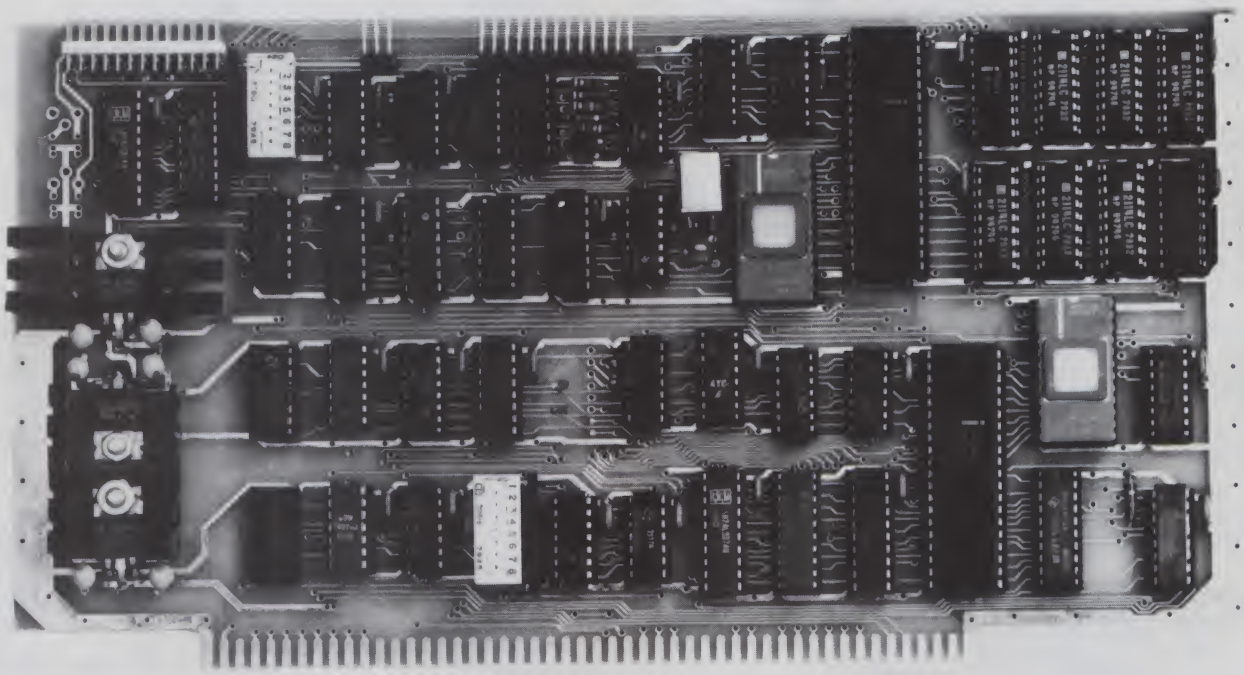

VIO-X

The VIO-X I/O Interface for the S-100 bus provides features equal to most intelligent terminals both efficiently and economically. It allows the use of standard keyboards and CRT monitors in conjunction with existing hardware and software. It will operate with no additional overhead in S-100 systems regardless of processor or system speed.

Through the use of the Intel 8275 CRT controller with an onboard 8085 processor and 4k memory, the VIO-X interface operates independently of the host system and communicates via two ports. The screen display rate is effectively 80,000 baud.

The VIO-X1 provides an 80 character by 24 line format using a 7 × 9 dot matrix to display the full upper and lower case ASCII alphanumeric 96 printable character set (including true descenders) with special characters for escape and control characters. An optional 2732 character generator is available which allows an alternate 7 × 9 contiguous graphics character set.

The VIO-X2 offers an 80 character by 25 line format using a 9 × 9 dot matrix allowing high-resolution characters to be used. This model also includes expanded firmware for block mode editing.

Both models support a full set of control characters and escape sequences, including controls for video attributes, cursor location and positioning, cursor toggle, light pen location, and scroll speed.

Video attributes provided by the 8275 in the VIO-X include:

- FLASH CHARACTER
- INVERSE CHARACTER
- UNDERLINE CHARACTER or
- ALTERNATE CHARACTER SET
- DIM CHARACTER


The above functions may be toggled together or separately.

The board may be addressed at any port pair in the S-100 host system. Status and data ports may be swapped if necessary. Inputs are provided for parallel keyboard and for light pen as well as an output for audio signalling. The interrupt structure is completely compatible with Digital Research's MP/M

FEATURES

- HIGH SPEED OPERATION
- PORT MAPPED S-100 INTERFACE
- FORWARD/REVERSE SCROLL or
- PROTECTED SCREEN FIELDS
- CONVERSATIONAL or BLOCK MODE
- INTERRUPT OPERATION
- CUSTOM CHARACTER SET
- CONTROL CHARACTERS
- ESCAPE CHARACTER COMMANDS
- INTELLIGENT TERMINAL EMULATION
- TWO PAGE SCREEN MEMORY

VIO-X1 80 × 24 7 × 9 A & T **$295.00**
Conversational & Limited Block Modes
VIO-X2 80 × 25 9 × 9 A & T **$345.00**
Conversational & Block Modes



VIO-X S-100 I/O INTERFACE

FULCRUM™ COMPUTER PRODUCTS

Distributed by:
WW COMPONENT SUPPLY INC. 1771 JUNCTION AVENUE • SAN JOSE, CA 95112 • (408) 295-7171


285

DIGITAL RESEARCH: PARTS

"TOP QUALITY PARTS FOR LESS"

9 Watt Stereo Amplifier

Brand New!



6.50

Fantastic!

One of the neatest items we have come up with. Operates on 8 to 20V. A.C. or D.C. (on board diodes).


- Separate tone control pots
- Balance control
- Volume control

Separate inputs for phono, radio, recorder, etc. Separate jack for head phones.

Replace your car stereo amp. Easy hook up — approximately 10 min. with our "how to" instructions.

Transformer for above — $3.50

4 Digit - 12 Hour D.C. Clock Module




4.00 or 3 for 10.50

On board time base using popular MM5369. Operates on 12 Volt D.C. Display can be blanked.

Draws 30 MA-Display On. 13 MA - Display Off. Includes standard 3 x 4 Matrix control board (not shown). Module measures 2⅜ x 1¾. Extra bright magnified digits. Display contains 2 extra digits for custom applications (calendar, lap counter, or ?).

Video Game Board



4.45

3 for 12.00

Hockey • Tennis • Handball

- General Instruments AY3-8500
- Features Exciting Sounds
- On Screen Scoring
- Speed & Paddle Controls
- 1 or 2 Players
- Works on 8-15 Volts D.C.

Each board comes with RF Modulator (Ch. 3 or 4) and schematic. The only parts needed to complete game are speaker, 2-1 Meg Pots & Switches.

IC Specials!

LM1889-2.25

MC1310 - 1.60

LM3820 - A.M. Radio on a chip w/specs.




2/1.00

16 Pin Header



4/1.00

Power Transistor TO220 Case



3/1.10

1 Amp 30 Watts 100 Volt

TIP 30C (PNP)

TIP 29C (NPN)

Gold Wire Wrap Sockets

Not Gold inlay as Sold By Others.



Super 3 Level Gold Wire Wrap.

14 Pin - **10/3.95, 25/8.75**

16 Pin - **10/4.95, 25/11.25**

Video Paddle Controls



2 for 1.00

1 Meg

Can be used with game board above.

Voltage Regulator

LM309K



1.00

5 Volt - 1 Amp Regulator TO3 Case. Super Special!

Sprague RFI Filter

3.65 or 3/9.00

Perfect for Computers, or anything that needs to be "glitch" free. By the #1 name in filtering, Sprague. JN17-5109B. Has I.E.C. Power Line Connector. 2x3 Amp. 115/220 VAC 60 Hz. 2⅛" x 2½" x 3" deep.

Switch Banks



- Non Canceling
- DPDT-PC or Solder **2.50**
- Switches Easily Removed
- Push On/Push Off

THAT'S INCREDIBLE!

Telephone Accessories by Edwards



48 V Loud

4.50

Rectifier Diode

IN4007



11/1.00

1000 Volts, 1 Amp

DO-41 Case • Prime • Long Lead • Marked.

RCA Triac

79¢

5 for 3.50



T2800M-TO220 Case

6 Amp 600 Volt

JFET OP AMP

Super High Input Impedance (10^{12} OHMS) — High Frequency Response. TO 4 MHZ. Large DC Voltage Gain 106 DB — New generation OP-AMP with Vastly Superior Features!

LF356BH - **75¢ or 3/2.00**

Micro Mini Toggle Switch



99¢

6 for 5.00

SPDT • Made in USA with Hardware

DON'T MISS THE 7205 TOSHIBA POWER AUDIO AMP ON PAGE 13 OF OUR FREE CATALOG!

TERMS: Add 50 postage, we pay balance. Orders under $15 add 75 handling. No C.O.D. We accept Visa, MasterCard and American Express cards. Tex. Res. add 5% Tax. Foreign orders (Canada 10%) add 20% P & H

• VISA • MASTERCARD • AMERICAN EXPRESS •

Digital Research: Parts

P.O. Box 401247 • Garland, Texas 75040

(214) 271-2461

Low Prices,

Printers



MX-80 - Epson
132 column, 9 x 9 dot matrix, multiple fonts

PRM-27080 *Save $100.00* ..... **Call**

MX-70

PRM-27070 *With Graftrax II* ..... **Call**

Interface & Cable for Apple **$110.00**



SPINWRITER - NEC
65 cps, bi-directional, letter quality printer with deluxe tractor mechanism, both parallel and serial interfaces on-board, 16K buffer, ribbon, print thimble, graphics, micro-space justification, data cable, and self test/diagnostic ROM.

PRD-55511 *without 16K buffer* ... **$2795.00**
PRD-55512 *with 16K buffer* **$2895.00**

Accessories for TRS-80



DISK DRIVES for TRS-80
23% more storage, 8 times faster, 40 track with free patch, 120 day warranty.

MSM-12410C *Save $125.00 !!!* **$325.00**

8" DISK DRIVES for MODEL II
2 double density drives with cabinet, power supply, & cables

END-000433 *Kit* **$1050.00**
END-000434 *Assembled* **$1250.00**
WCA-5036A *Cable (required)* **$29.95**

Special Purchase - Save $50.00

Novation Cat Modem
300 baud, answer and originate




(We have only ~~200~~ 265 availible at this special price)

IOM-5200A *List price $189.95* **$139.95**

D-CAT 300 baud, direct connect modem
IOM-5201A *Special sale price* **$189.00**

AUTO-CAT Auto answer/origiate, direct connect
IOM-5230A *Special sale price* **$239.95**

Accessories for Apple



16K MEMORY UPGRADE
Add 16K of RAM to your TRS-80, Apple, or Exidy in just minutes. We've sold thousands of these 16K RAM upgrades which include the appropriate memory chips (as specified by the manufacturer), all necessary jumper blocks, fool-proof instructions, and our 1 year guarantee.

MEX-16100K *TRS-80 kit* **$29.00**
MEX-16101K *Apple kit* **$29.00**
MEX-16102K *Exidy kit* **$29.00**

16K RAM Card - Microsoft
(There is life after 48K)

MEX-16300A *A & T* **$174.95**

Z-80* CARD for APPLE
Two computers in one, Z-80 & 6502, more than doubles the power & potential of your Apple, includes Z-80 CPU card, CP/M 2.2, & BASIC-80*

CPX-30800A *A & T* **$279.95**

Atari 800 $799.95

APPLE CLOCK - Cal Comp Sys
Real time clock w/battery back-up

IOK-2030A *A & T* **$109.95**

APPLE STICK - Micromate
Joy stick with pots for Apple II

SYA-1510A *A & T* **$49.95**

VISICALC - Personal Sftwr
The ultimate program for your Apple II

SFA-24101005M *Complete package* **$139.95**

DOS 3.3 UPGRADE - Apple
Upgrade your old DOS to the improved 3.3

IOD-2233A *Complete kit* **$64.95**

DISK DRIVE for APPLE
5¼" disk drive with controller for your Apple

MSM-12310C *with controller* **$475.00**
MSM-123101 *w/out controller* **$375.00**

8" DRIVES for APPLE
Controller, DOS, two 8" double densisty drives, cabinet, power supply, & cables

Special Package Price *Kit* **$1399.95**

PRINTER INTERFACE - C.C.S.
Centronics type I/O card w/ firmware

IOI-2041A *A & T* **$99.95**

AIO, ASIO, APIO - S.S.M.
Parallel & serial interface for your Apple (see Byte pg 11)

IOI-2050K *Par & Ser kit* **$129.95**
IOI-2050A *Par & Ser A & T* **$159.95**
IOI-2052K *Serial kit* **$89.95**
IOI-2052A *Serial A & T* **$99.95**
IOI-2054K *Parallel kit* **$69.95**
IOI-2054A *Parallel A & T* **$89.95**

A488 - S.S.M.
IEEE 488 controller, uses simple basic commands, includes firmware and cable, 1 year guarantee, (see April Byte pg 11)

IOX-7488A *A & T* **$399.95**

Disk Drives

*JADE's new dual disk sub-assemblies include: **Handsome** metal cabinet with **proportionally balanced** air flow system, **assembled & tested** dual drive power supply, **quiet whisper type** cooling fan, power-cable kit, lighted power switch, approved fuse assembly, line cord, **Never-Mar** rubber feet, and all necessary hardware to mount 2-8" disk drives - it's **all American made, guaranteed for six months**, and it's in stock!*

Dual 8" Sub-Assembly Cabinet

END-000421 *Cabinet kit* **$225.00**
END-000420 *Bare cabinet* **$59.95**

Single sided, double density disk drive sub-system

END-000423 *Kit w/2 8" drives* **$975.00**
END-000424 *A & T w/2 8" drives* **$1195.00**

Double sided, double density disk drive sub-system

END-000426 *kit w/2 8" drives* **$1495.00**
END-000427 *A & T w/2 8" drives* **$1695.00**

8" DISK DRIVES
Highly reliable double density floppy disk drives

Shugart 801R single sided, double density

MSF-10801R *SA-801R* **$425.00**
Special Sale Price ..... ***2 for $790.00***

Shugart 851R double sided, double density

MSF-10851R *SA-851R* **$595.00**
Special Sale Price ..... ***2 for $1150.00***

Siemens FDD100-8D2 single sided, double density

MSF-201120 *6 mo warranty* **$385.00**
Special sale price ..... ***2 for $750.00***

Qume Datatrak 8 double sided, double density

MSF-750080 *SA-851R compatible* .. **$599.95**
Special sale price ..... ***2 for $1160.00***

JADE DISK PACKAGE
Double density controller, two 8" double density floppy disk drives, CP/M 2.2 (configured for controller), hardware and software manuals, boot PROM, cabinet, power supply, fan, & cables

Special Package Price *Kit* **$1395.00**

Diskettes

DISKETTES - Jade
Bargain prices on magnificent magnetic media

5¼" single sided, single density, box of 10

MMD-5110103 *Soft sector* **$27.95**
MMD-5111003 *10 sector* **$27.95**
MMD-5111603 *16 sector* **$27.95**

5¼" double sided, double density, box of 10

MMD-5220103 *Soft sector* **$39.95**

8" single sided, single density, box of 10

MMD-8110103 *Soft sector* **$33.95**

8" single sided, double density, box of 10

MMD-8120103 *Soft sector* **$39.95**

8" double sided, double density, box of 10

MMD-8220103 *Soft sector* **$49.95**

Video Monitors

13" COLOR MONITOR - Zenith
The hi res color you've been promising yourself

VDC-201301 ..... **$449.00**

12" GREEN SCREEN - NEC
20 MHz, P31 phosphor video monitor with audio, exceptionally high resolution - A fantastic monitor at a very reasonable price


VDM-651200 *12" monitor* **$259.95**

Leedex / Amdek
Reasonably priced video monitors

VDM-801210 *Video 100 12" B&W* .. **$149.95**
VDM-801230 *Video 100-80 12" B& W* **$189.95**
VDM-801250 *12" Green Phospor* **$189.95**
VDC-801310 *13" Color I* **$399.95**

Fast Service.

S-100 CPU

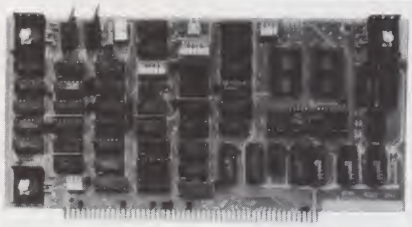

CB-2 Z-80 CPU - S.S.M.

2 or 4 MHz Z-80 CPU board with provision for up to 8K of ROM or 4K of RAM on board, extended addressing, IEEE S-100, front panel compatible.

CPU-30300K *Kit* **$239.95**
CPU-30300A *A & T* **$299.95**

THE BIG Z* - Jade

2 or 4 MHz switchable Z-80 CPU with serial I/O, accomodates 2708, 2716, or 2732 EPROM, baud rates from 75 to 9600*

CPU-30201K *Kit* **$145.00**
CPU-30201A *A & T* **$199.00**
CPU-30200B *Bare board* **$35.00**

2810 Z-80* CPU - Cal Comp Sys

2 4 MHz Z-80A CPU with RS-232C serial I/O port and on-board MOSS 2.2 monitor PROM, front panel compatible.*


CPU-30400A *A & T* **$269.95**

SBC-200 - SD Systems

4 MHz Z-80 CPU with serial & parallel I/O ports, up to 8K of on-board PROM, software programmable baud rate generator, 1K of on-board RAM, Z-80 CTC.*

CPC-30200K *Kit* **$339.95**
CPC-30200A *Jade A & T* **$399.95**

S-100 I/O

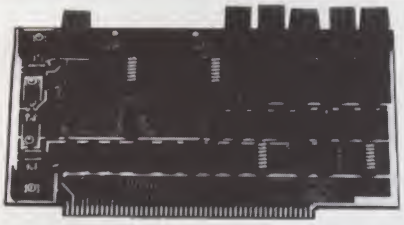

I/O-4 - S.S.M.

2 serial I/O ports plus 2 parallel I/O ports

IOI-1010K *Kit* **$159.95**
IOI-1010A *A & T* **$219.95**
IOI-1010B *Bare board* **$35.00**

S.P.I.C. - Jade

Our new I/O card with 2 SIO's, 4 CTC's, and 1 PIO

IOI-1045K *2 CTC's, 1 SIO, 1 PIO* .. **$199.00**
IOI-1045A *A & T* **$259.00**
IOI-1046K *4 CTC's, 2 SIO's, 1 PIO* **$259.00**
IOI-1046A *A & T* **$319.00**
IOI-1045B *Bare board w/ manual* ... **$59.95**
IOI-1045D *Manual only* **$20.00**

Motherboards

ISO-BUS - Jade

Silent, simple, and on sale - a better motherboard

6 Slot (5¼" x 8¾")

MBS-061B *Bare board* **$19.95**
MBS-061K *Kit* **$39.95**
MBS-061A *A & T* **$49.95**


12 Slot (9¾" x 8¾")

MBS-121B *Bare board* **$29.95**
MBS-121K *Kit* **$69.95**
MBS-121A *A & T* **$89.95**

18 Slot (14½" x 8¾")

MBS-181B *Bare board* **$49.95**
MBS-181K *Kit* **$99.95**
MBS-181A *A & T* **$139.95**

S-100 Memory



EXPANDORAM II - S D Systems

4 MHz RAM board expandable from 16K to 64K

MEM-16630K *16K kit* **$275.95**
MEM-32631K *32K kit* **$295.95**
MEM-48632K *48K kit* **$315.95**
MEM-64633K *64K kit* **$335.95**
Assembled & tested ..... add **$50.00**

64K RAM - Calif Computer Sys

4 MHz bank port / bank byte selectable, extended addressing, 16K bank selectable, PHANTOM line allows memory overlay, 8080 / Z-80 / front panel compatible.

MEM-64565A *A & T* **$575.00**

MEMORY BANK - Jade

4 MHz, IEEE S-100, bank selectable, 8 or 16 bit, expandable from 16K to 256K

MEM-99730B *Bare board* **$55.00**
MEM-99730K *Kit, no RAM* **$219.95**
MEM-16730K *16K kit* **$249.95**
MEM-32731K *32K kit* **$289.95**
MEM-48732K *48K kit* **$324.95**
MEM-64733K *64K kit* **$359.95**
Assembled & tested ..... add **$50.00**

32K STATIC RAM - Jade

2 or 4 MHz expandable static RAM board uses 2114L's


MEM-16151K *16K 4 MHz kit* **$169.95**
MEM-32151K *32K 4 MHz kit* **$299.95**
Assembled & tested ..... add **$50.00**

16K STATIC RAM - Cal Comp Sys

2 or 4 MHz 16K static RAM board, IEEE S-100, bank selectable, Phantom capability, addressable in 4K blocks

MEM-16160A *16K 2 MHz A & T* ... **$286.95**
MEM-16162A *16K 4 MHz A & T* ... **$289.95**
MEM-16160B *Bare board* **$50.00**

S-100 PROM Boards



PB-1 - S.S.M.

2708, 2716 EPROM board with built-in programmer

MEM-99510K *Kit* **$139.95**
MEM-99510A *A & T* **$199.95**

PROM-100 - SD Systems

2708, 2716, 2732, 2758, & 2516 EPROM programmer

MEM-99520K *Kit* **$219.95**
MEM-99520A *Jade A & T* **$269.95**

EPROM BOARD - Jade

16K or 32K uses 2708's or 2716's, 1K boundary

MEM-16230K *Kit* **$79.95**
MEM-16230A *A & T* **$119.95**


Mainframes

MAINFRAME - Cal Comp Sys

12 slot S-100 mainframe with 20 amp power supply

ENC-112106 *A & T* **$429.95**

S-100 Disk Controller

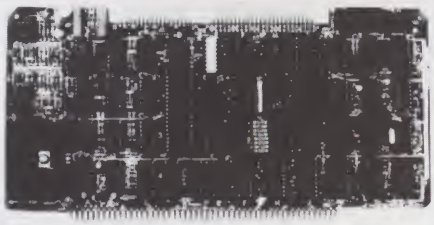

DOUBLE-D - Jade

Double density controller with the inside track, on-board Z-80A, printer port, IEEE S-100, can function on an interrupt driven buss*

IOD-1200K *Kit* **$299.95**
IOD-1200A *8" A & T* **$389.95**
IOD-1205A *5¼" A & T* **$389.95**
IOD-1200B *Bare board* **$65.00**

DOUBLE DENSITY - Cal Comp Sys

5¼" and 8" disk controller, single or double density, with on-board boot loader ROM, and free CP/M 2.2 and manual set.*

IOD-1300A *A & T* **$369.95**

VERSAFLOPPY II - SD Systems

New double density controller for both 8" & 5¼"

IOD-1160K *Kit* **$339.95**
IOD-1160A *A & T* **$379.95**

S-100 Video

VB-3 - S.S.M.

80 characters x 24 lines expandable to 80 x 48 for a full page of text, upper & lower case, 256 user defined symbols, 160 x 192 graphics matrix, memory mapped, has key board input.

IOV-1095K *4 MHz kit* **$345.00**
IOV-1095A *4 MHz A & T* **$395.95**
IOV-1096K *80 x 48 upgrade* **$39.95**

VDB-8024 - SD Systems

80 x 24 I/O mapped video board with keyboard I/O, and on-board Z-80A.*

IOV-1020K *Kit* **$399.95**
IOV-1020A *Jade A & T* **$459.95**

VIDEO BOARD - Jade

64 characters x 16 lines, 7 x 9 dot matrix, full upper/lower case ASCII character set, numbers, symbols, and greek letters, normal/reverse/blinking video, S-100.

IOV-1050K *Kit* **$99.95**
IOV-1050A *A & T* **$125.00**
IOV-1050B *Bare board* **$29.95**

2114L Low Power 4MHz

1 - 19	20 - 99	100 or more
$3.35	$2.99	$2.50

Place Orders Toll Free

Continental U.S. **800-421-5500**
Inside California **800-626-1710**

For Technical Inquires or Customer Service call:
213-973-7707

JADE

Computer Products

4901 W. Rosecrans, Hawthorne, Ca 90250

TERMS of SALE: Cash, checks, credit cards, or Purchase Orders from qualified firms and institutions. **Minimum Order $15.00.** California residents add 6% tax. Minimum shipping & handling charge $3.00. **Pricing & availibility subject to change**

MICROCOMPUTING T.M. LIST OF ADVERTISERS

Reader Service Number		Page
121	A B Computers	68
273	A B M Products	168
91	Aardvark Technical Services	55
498	Abacus Software	208
261	Ackerman Digital Systems, Inc	205
495	Advanced Management Strategies	206
393	Adventure International	72,73
311	Alpha Byte Stores	83
249	American Software & Systems, Inc	58
56	American Square Computers	211
187	Ancie Labs	170
387	Apple Orchard	65
•	Applied Analytics	19
192	Audio Video Systems	112
193	Aurora Software	93
96	Automated Equipment	219
389	Automated Equipment	200
55	Automated Simulations	15
473	Axlon, Inc	199,200
124	B.T. Enterprises	199
99	John Bell Engineering	142
466	Bluebird's Computer Software	210
471	Braemar Computer Devices, Inc	203,204
494	Harry H. Briley	209
110	CFR Associates	76
476	CGRS Microtech, Inc	199
256	The CPU Shop	115
79	C&S Electronics	221
299	California Data Corp	146
483	California Digital Engineering	206
470	Centronics Data Computer Corp	198
165	Charles Mann & Assoc	161
492	Charles Mann & Assoc	206
170	Chips & Dale	70
376	Communications Electronics	179
90	CompuCover	113
43	Compumart	188,189
42	CompuPro	187
58	The Computer Answer	14
320	Computer Case Company	82
18	Computer Design Labs	111
120	Computer Discount of America	121
370	Computer Dynamics	146
384	Computer Mail Order	129
362	Computer Plus	169
•	Computer Reference Guide	31
36	Computer Shopper	103
283	The Computer Stop	60
105	The Computer Stop	149
176	Computer Trader	196
336	The Computerist, Inc	199
227	Computers Wholesale	145
6	Computronics	47
197	Compuware Corporation	218
297	Concord Computer Products	182
486	Connecticut Information Systems	207
346	Courseir Computer Corp	173
141	Custom Electronics, Inc	172
•	Cybernetics	103
293	D & N Micro Products	172
210	Data Ed, Inc	91
480	Dataroyal, Inc	198
379	Datasearch, Inc	156
35	Datasoft	23
63	Davis Systems	123
•	Digital Research Computers	180,181
342	Digital Research, Inc	CIII
•	Digital Research Parts	191
61	Digital Systems Engineering	171
212	Digital Systems Engineering	213
250	Discount Software Group	62
34	Dr. Daley	77
87	Dwo Quong Fok Lok Sow	221
467	ESI Lynx	202,203
82	Ecosoft	68
93	Electronic Specialists	123
47	Electronic Systems	178
•	Electrovalue Industrial	146
493	Elliam Associates	210
272	Ellis Computing	21
116	Epson America	37
254	Erickson Communications	134
327	Essex Publishing	163
70	FMG Corp	131
191	Floppy Disk Service	151
469	G & G Engineering	204
135	Galactic Software Ltd	122
392	General Videotex Corp	205
22	Gimix, Inc	90
301	Gimix, Inc	205
42	Godbout Electronics	187
5	Hanley Engineering	135
243	Happy Hands	70
236	Heath Company	49
•	Heath Company	48
209	Ian Electronics	112
223	Inmac	131
382	Innovative Software Applications	195
40	Instant Software	27,159,164,165
75	Instant Software	112,118,140,148,196,218
77	Integrand Research Corp	76
151	Interface, Inc	14
3	Intertec Data Systems	3
203	J.C. Datatron	38
180	J.E.S. Graphics	103
92	J.P.C. Products	123
126	JR Inventory Company	39
48	Jade Computer Products	192,193
41	Jameco	184,185
353	Jini Microsystems	207
247	Joe Computer	127
222	Kalglo Electronics	70
198	LNW Research	214
•	L & S Computer Ware	155
355	Leading Edge Products	11
23	Level IV Products, Inc	69,137
312	Lifeboat Associates	79
373	Logical Devices	143
330	Logical Systems, Inc	201
316	MCP Computer Products	131
190	MI-8	172
234	Magnolia Microsystems	218
485	Manhattan Software	209
•	McGraw-Hill Book Company	30
161	Meta Technologies Corp	7
308	Micro 80, Inc	122
108	Micro Architect	106
487	Microcom, Inc	208
488	Microcomputer Consultants	207
260	The Microcomputer Warehouse	58
248	Microdome	213
468	Micro-Expander, Inc	198
•	Micro Journal	200
68	Micro Mail	78
100	Micro Management Systems	45
134	Micro Matrix	205
•	Microsette	139
154	Micro Technology Unlimited	107
465	Microtek, Inc	203
150	Midwest Computer Peripherals	119
144	Midwest Scientific Instruments	124,125
•	Mikos	183
255	Miller Microcomputer Services	128
391	Minis 'n Micros	205
304	Mini Micro Mart	110
238	Mini Micro Mart	223
50	Mini Micro Mart	224
226	Mini Micro Mart	225
37	Mullen Computer Products	114
81	Multi Business Computer Systems	136
491	Muse Software	207
496	MuSYS	209
378	Natural Language Systems	196
•	Netronics R & D Ltd	210,22,130
474	Newtech Computer Systems, Inc	204
286	Nibble	144
356	The OLCTD	12
•	Oasis Systems	208
4	Ohio Scientific	CIV
365	Okidata Corp	87
130	Olensky Brothers, Inc	82
89	Omega Sales Company	40
140	Omnitek Systems	70
475	Onyx Distribution, Inc	200
310	Orange Micro	97
368	Osborne Computers	25
489	PhD Associates, Inc	208
129	PM Computers	27
246	Pacific Exchanges	112
172	Pacific Exchanges	51
274	Pacific Exchanges	106
153	Pacific Office Systems	123
71	Pan American Electronics	213
1	Percom Data Company	CII
472	Percom Data Company	200,202
98	Peripherals Plus	38
266	Perry Oil & Gas	157
303	Personal Computer Systems	18
499	Personal Software, Inc	206
202	Progressive Computing	203
44	Quest Electronics	177
52	RNB Enterprises	186
482	RKS Enterprises	204
390	R.W. Electronics	138
101	Racet Computes	136
•	Rainbow Computing	161
142	Random Access, Inc	147
102	Rand's Inc	141
479	Raster Graphics	202
•	Realty Software Company	112
74	Rondure Company	27
146	Scelbi Publications	173
374	Select Information Systems, Inc	71
497	Select Information Systems, Inc	210
386	Simutek	8
132	Sixty-eight Micro Journal	205
•	Snapp, Inc	13
484	Softronics	206
385	Software Concepts	209
213	Software Consultants	205
306	Spectrum Software	27
217	Standard Software Corp. of America	148
288	The Stocking Source	33
244	Sun Research	57
367	System Software Design, Inc	140
189	Tab Sales Company	151
•	Taranto & Associates	166
233	Tarheel Software Systems	173
139	Tecmar, Inc	147
328	Texas Computer Systems	203
•	VR Data Corp	53
214	Vanhorn Office Supply	156
200	Votrax	17
285	W. W. Components Supply	190
•	Wameco, Inc	183
•	West Side Electronics	30
284	White River Products	171
163	Wintek Corp	140
45	Wordcraft	171
122	World Wide Electronics	205

kilobaud MICROCOMPUTING T.M.

For further information from our advertisers, please use the Reader Service card.

*This advertiser prefers to be contacted directly.

READER SERVICE

Reader Service: Return this card to receive full information on the products advertised in this issue. Refer to the ad. You will find numbers near the logo of each advertiser. Each represents the advertiser's individual Reader Service number. Circle the corresponding numbers on one of the cards on this page, include your name, address & zip, and drop in a mailbox. In 4–6 weeks you'll hear from the advertiser directly.

This card valid until September 30, 1981

Please help us to bring you a better magazine—by answering these questions:

1. What is your age?
   A ( ) Under 20
   B ( ) 20–30
   C ( ) 30–40
   D ( ) 40–50
   E ( ) Over 50
2. What is your annual income?
   A ( ) Under $20,000
   B ( ) $20,000–$30,000
   C ( ) $31,000–$40,000
   D ( ) $41,000–$50,000
   E ( ) Over $50,000
3. What is your education level?
   A ( ) High School
   B ( ) Trade or Technical School
   C ( ) College
   D ( ) Graduate School
4. Do you own a microcomputer?
   A ( ) Yes
   B ( ) No
5. What kind of system?
   A ( ) Apple
   B ( ) Commodore
   C ( ) Heath
   D ( ) Hewlett Packard
   E ( ) Other
   F ( ) IMSAI
   G ( ) Micro Star
   H ( ) MITS
   I ( ) OSI
   J ( ) PET
   K ( ) TRS-80
   Please specify
6. What was the cost?
   A ( ) Under $1,000
   B ( ) $1,000–$2,000
   C ( ) $2,000–$4,000
   D ( ) More than $4,000
7. What is the primary use of your computer?
   A ( ) Business (Home, Professional)
   B ( ) Personal (Home Management, Hobby, Entertainment)
   C ( ) Education
   D ( ) Research/Technical
   E ( ) Other
8. What is your occupational field?
   A ( ) Professional (Lawyer, Accountant, Physician, etc.)
   B ( ) Engineering
   C ( ) Business
   D ( ) Educational
   E ( ) Government
   F ( ) Scientific
9. Does your employer own a computer?
   1 ( ) Yes
   2 ( ) No
   3 ( ) Self-employed (Go 2)
10. Do you work with the company computer?
    A ( ) Yes
    B ( ) No
    C ( ) N/A
11. Do you have any influence on the use of the company computer?
    1 ( ) Yes
    2 ( ) No
    3 ( ) N/A
12. Do you have any influence over or make the decisions on the purchase of computer equipment for your employer?
    A ( ) Yes
    B ( ) No
    C ( ) N/A
13. If you are not a subscriber, please circle 500

1	6	11	16	21	126	131	136	141	146	251	256	261	266	271	376	381	386	391	396
2	7	12	17	22	127	132	137	142	147	252	257	262	267	272	377	382	387	392	397
3	8	13	18	23	128	133	138	143	148	253	258	263	268	273	378	383	388	393	398
4	9	14	19	24	129	134	139	144	149	254	259	264	269	274	379	384	389	394	399
5	10	15	20	25	130	135	140	145	150	255	260	265	270	275	380	385	390	395	400
26	31	36	41	46	151	156	161	166	171	276	281	286	291	296	401	406	411	416	421
27	32	37	42	47	152	157	162	167	172	277	282	287	292	297	402	407	412	417	422
28	33	38	43	48	153	158	163	168	173	278	283	288	293	298	403	408	413	418	423
29	34	39	44	49	154	159	164	169	174	279	284	289	294	299	404	409	414	419	424
30	35	40	45	50	155	160	165	170	175	280	285	290	295	300	405	410	415	420	425
51	56	61	66	71	176	181	186	191	196	301	306	311	316	321	426	431	436	441	446
52	57	62	67	72	177	182	187	192	197	302	307	312	317	322	427	432	437	442	447
53	58	63	68	73	178	183	188	193	198	303	308	313	318	323	428	433	438	443	448
54	59	64	69	74	179	184	189	194	199	304	309	314	319	324	429	434	439	444	449
55	60	65	70	75	180	185	190	195	200	305	310	315	320	325	430	435	440	445	450
76	81	86	91	96	201	206	211	216	221	326	331	336	341	346	451	456	461	466	471
77	82	87	92	97	202	207	212	217	222	327	332	337	342	347	452	457	462	467	472
78	83	88	93	98	203	208	213	218	223	328	333	338	343	348	453	458	463	468	473
79	84	89	94	99	204	209	214	219	224	329	334	339	344	349	454	459	464	469	474
80	85	90	95	100	205	210	215	220	225	330	335	340	345	350	455	460	465	470	475
101	106	111	116	121	226	231	236	241	246	351	356	361	366	371	476	481	486	491	496
102	107	112	117	122	227	232	237	242	247	352	357	362	367	372	477	482	487	492	497
103	108	113	118	123	228	233	238	243	248	353	358	363	368	373	478	483	488	493	498
104	109	114	119	124	229	234	239	244	249	354	359	364	369	374	479	484	489	494	499
105	110	115	120	125	230	235	240	245	250	355	360	365	370	375	480	485	490	495	500

Name _____

Address _____

City _____ State _____ Zip _____

Kilobaud Microcomputing • July 1981

Microcomputing • POB 2741 • Clinton IA 52735

BOOKS

Please send me the following Microcomputing products:

Qty.	Catalog #	Title	Unit Price	Total

Add $1 shipping/handling _____

Total _____

Please allow 4–6 weeks for delivery. No C.O.D.s accepted.

Enclosed $ _____ ☐ Check ☐ M.O.
Bill: ☐ AE ☐ MC ☐ Visa

Card # _____ Exp. date _____
Signature _____ Interbank # _____
Name _____
Address _____
City _____
State _____ Zip _____

7-81

Microcomputing • Mail Order Dept. • Peterborough NH 03458

SUBSCRIPTION

MICROCOMPUTING subscribers save $10 off the newsstand price.

☐ New subscription ☐ Renewal
☐ 1 year —$25
☐ 2 years—$38
☐ 3 years—$53
Enclosed $ _____ ☐ Check ☐ M.O.
Bill: ☐ MC ☐ Visa ☐ AE ☐ me

Card # _____ Exp. date _____
Signature _____ Interbank # _____
Name _____
Address _____
City _____ State _____ Zip _____

31789

Microcomputing • POB 997 • Farmingdale NY 11737

kilobaud MICROCOMPUTING

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 217 CLINTON IA 52735

kilobaud POSTAGE WILL BE PAID BY ADDRESSEE

MICROCOMPUTING T.M.

POB 2741
Clinton IA 52735

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 1024 PETERBOROUGH NH 03458

kilobaud POSTAGE WILL BE PAID BY ADDRESSEE

MICROCOMPUTING T.M.

Subscription Dept.
POB 997
Farmingdale NY 11737

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 1024 PETERBOROUGH NH 03458

kilobaud POSTAGE WILL BE PAID BY ADDRESSEE

MICROCOMPUTING T.M.

Peterborough NH 03458

Att. Mail Order

LETTERS

(from page 32)

On Thursday, September 10, 1981, we will be devoting our "Media Network" program to the subject of home computers and how they can be of use to the active shortwave listener. As well as an introduction to microcomputing, we will also be including a short computer program in three different formats, broadcast in machine readable form over the air. Providing the signal strength is sufficient in the listener's area, we hope that it will be possible to record the computer program (off the air) onto cassette tape and play it back into a home computer. Preliminary experiments indicate that the system should work, but the purpose of the experiment is to gauge whether atmospheric noise is low enough in most of our target areas to enable the scheme to work. If successful, then the idea might be repeated on a more regular basis. Three computer programs, of use to the shortwave listener, and compatible with Tandy Radio Shack, Apple and Commodore PET microcomputers, will be transmitted.

We invite readers to tune in to our shortwave programs from Holland at the times and frequencies listed in Table 1. The program runs for 30 minutes. Listeners who hear the broadcast and try out the computer program are encouraged to write in and report their results to the following address:
Computer Experiment
Media Network
Radio Netherlands
PO Box 222
1200 JG Hilversum, Holland

J. Marks
Producer
Media Network
Hilversum, Holland

Better Red than Dead?

Your paragraph on Phyllis Schlafly ("Micro-Scope," April 1981) exemplified a decades-long characteristic of this culture (denouement imminent): what this culture scorns most is to think beyond the immediate moment to avoid national suicide.

Daniel M. Howard
Oakland, CA

Souped-up TRS-80

While thumbing through some back issues of *Kilobaud Microcomputing*, I came across Ronald W. Cowart's excellent article, "More TRS-80 Horsepower—Adding Level III BASIC" (October 1979). I read with interest the third section of the article, "Modifications for Level III BASIC." Since I own one of the "early model" TRS-80s which contain two Level I ROMs, I was rather disappointed to discover I couldn't add Level III because the modification was for the "later models" containing only one Level I ROM. With much apprehension, I decided to improvise.

I followed the directions exactly as they were presented in the article with several exceptions:

1. I connected contact 5 of the switch to Z34-20, not Z33-20. (See Fig. 2, p. 75.)
2. I connected contact 4 of the switch to the feedthrough just below the cut for the trace at Z34-20, not Z74-9. (See Fig. 2, p. 75.)

By making a "piggy back" chip out of ROM a and ROM b, I was able to bypass my obstacle of having two Level I ROMs instead of only one. Caution: Be sure to secure the bottom ROM in several layers of aluminum foil before soldering, since this acts as a heat sink, preventing damage to the chips. Plug the "piggy back" Level I ROM into socket Z34, double-check all connections and mount the switch as shown. Voila—Level III.

Greenwich Mean Time	Short-wave Frequency (kHz)	Target Area
07.47	9770, 9715	Australia
08.47	9715	Australia
09.47	15560, 11930, 9895, 6045, 5955	Europe
13.50	17605, 11930, 9895, 6045, 5955	Europe
14.47	11735, 15560, 21480	Southeast Asia
18.47	15220, 6020	East Africa
20.47	21685, 17695, 17605, 15220, 9715	West and central Africa (frequencies also audible in Europe)
02.47*	9590, 6165	Eastern North America
05.47*	9715, 6165	Western North America

*Note, this and the next transmission are shown as early Friday morning GMT, but it is still Thursday evening in the target area.

Table 1.

SPELLGUARD™

Spelling Checker for Professionals.

SPELLGUARD eliminates spelling and typographical errors in documents prepared with CP/M[1] or CDOS[2] word processors.

SPELLGUARD is a unique program that leads the microcomputing industry in its efficiency, ease of use, and reliability.

FAST
- Proofreads 20 pages in under one minute.*

POWERFUL
- 20,000 word dictionary, expandable with single keystroke.
- Properly handles hyphens and apostrophes.
- Allows multiple, technical dictionaries.

RELIABLE
- Over 500 shipped by March 1981.
- 30-day money-back limited warranty.
- Industry leading Softguard™ feature ensures diskette copy of program is undamaged.

EASY TO USE
- On-line help feature.
- Misspelled words marked in text for easy, in-context correction.
- Examples of all functions in 120 page manual.

COST EFFECTIVE
- SPELLGUARD'S unique speed and accuracy easily recovers the suggested $295 price.

*Time estimates based on double density 8" diskettes and 4Mhz system.

Trademarks: [1]Digital Research, [2]Cromemco

Contact your local dealer or write ISA for a SPELLGUARD brochure.

The fast, accurate proofreader.

INNOVATIVE SOFTWARE APPLICATIONS
P.O. Box 2797, Menlo Park, CA 94025
(415) 326-0805
✓382

✓See List of Advertisers on page 194

UNIDEP T.M.
Asset Management Program

Designed for you. Adapts to your accounting system & hardware. You choose:

- depreciation type
- length of term
- reporting period
- when to print reports
- when to update values

Change any value any time. Includes investment credit, bonus depr. $99 for Apple II (32K) or TRS 80 Mod II (64 K), 1 Disk.

Another UNIFACE® product from
Natural Language Systems, Inc.
411 Barber Ave
Ann Arbor, Mich 48103
(313) 668-1806 ✓378

Apple is a registered trademark of Apple Computer, Inc
TRS 80 is a registered trademark of Radio Shack

BUY! SELL! TRADE!
COMPUTER & HAM EQUIPMENT
COMPUTER TRADER ✓176
"GREEN SHEETS"
Mailed 1st class, 1st and 15th of every month
SEND ADS FIVE DAYS BEFORE MAILING DATE
— RATES —

Subscriptions		Ads	
One Year	$10.00	Hobby	20¢ Word/Number
Six Months	$6.00	Business	55¢ Word/Number
Per Copy	$1.00	(Non-Subscriber	Add 15¢ Word/Number)

SAVE 50% on your 1st ad accompanying your subscription
Send Ads and Subscriptions with remittance to:

COMPUTER TRADER®
Chet Lambert, W4WDR
1704 Sam Drive • Birmingham, AL 35235
(205) 854-0271
For ads count name and address, words and numbers (zip/area code free)
Please include your name, address, call sign or phone number

No. 5 UNBELIEVABLE OPPORTUNITY!

If You've Written State-of-the-Art Software-- We'd Like to Publish It!

We're looking for SYSTEM software:
DISK OPERATING SYSTEMS
MONITORS
PROGRAMMER AIDS/UTILITIES
LANGUAGES
DATA BASE SYSTEMS
Then, sit back and collect your royalty checks. Write for our free Programmer's Kit today!

INSTANT SOFTWARE, INC. ✓75
Submissions Dept.
Peterborough, NH 03458

Although I don't use Level I very often, it's still nice to know it's there whenever I have the urge to "return to the grass roots."

Bob Wesley
Plattsburgh, NY

IDS Update

Several changes of interest have taken place since my article, "A Tale of Two Screen Dumps" (April 1981, p. 174), was written. Integral Data Systems (IDS) recently stopped manufacture of the Model 440 printer and replaced it with the less expensive 445. It is totally compatible with the older 440, since most of the changes involve a new head, ribbon and head drive motor. IDS also began shipment of the new 460 and 560 printers. They are definitely not compatible software-wise with the screen dumps described. Computer Stations, however, is now delivering another software package identical to the enhanced version to drive the 460 and 560 printers. I have personally used this package on the 460 printer and found it to perform identically with the 440 version. (The 560 printer is essentially a "stretch" version of the 460 and will take wider paper. It is otherwise identical with the 460 printer.)

There is, however, a tremendous difference in the graphic output quality. The 460 printer can truly make a white piece of paper black, and leave white dots for the graphic output. (See Example 1.) Also, the image printed by the 460 will have the correct aspect ratio (i.e., circles on the Apple screen will be printed as circles on the 460).

Computer Stations has advised me that they now offer a similar package for use with Pascal (Pascal Tigergraphics) and either the 440/445 or 460/560 printers. I haven't used either of these packages, and merely make note of their availability for those of you with interest in Pascal.

Jim Hansen
Lebanon, NH


Dynamic Software for MSI

I have been using Software Dynamics software exclusively for the past several years on my Midwest Scientific Instruments computer and would like to share with your readers the many benefits available from the system.

SDBASIC Version 1.4 has been optimized for use with SDOS, SD's proprietary operating system, which is available for many 68xx-based machines. As such it is about one-third faster than previous versions, and programs are more compact. However, five unique features warrant its consideration over any other higher-level language currently available: the use of long variable names, labels to replace line numbers, subroutines and multi-line user definitions similar to FORTRAN and Pascal, unusually powerful string-handling capabilities and jump table access to the run-time-package floating point routines. While many languages offer one or more of these features, I know of none available for microcomputers which offers all.

The total SD package is also unique in many respects. Two editors (line and screen), an assembler and several application programs all designed to work with SDOS are available. Expected in the next few months are a relocating assembler and linker, which will support the powerful potential of the externally defined subroutine and user definition capabilities.

SDOS itself has features which will be

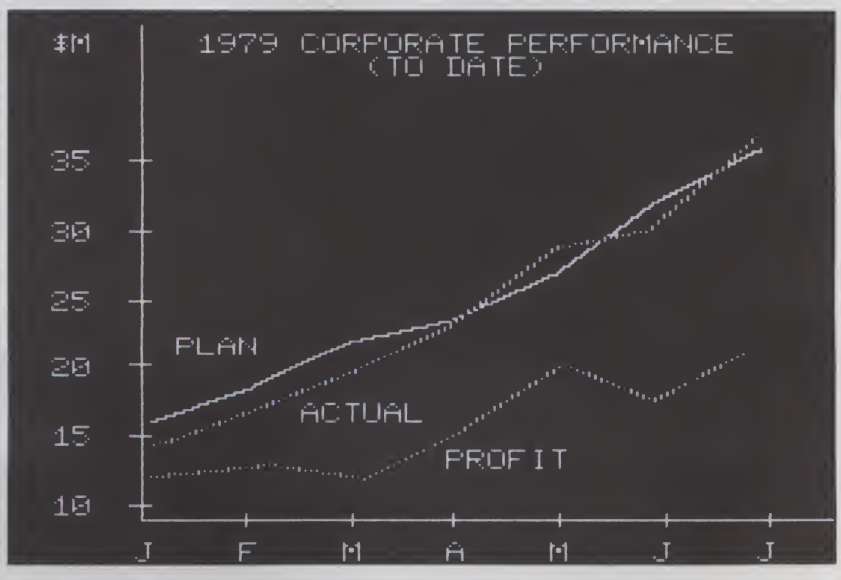

Example 1. Print sample on the enhanced package disk printed on the 460 printer in the "picture" mode to show how the printer can print a solid black background leaving white graphics.

much appreciated by anyone who has tried to modify an operating system in a unique way. It consists of three parts. The main part, SDOS proper, cannot easily be manipulated, but there is no real need to do so because its function is to interpret system calls and handle system architecture such as disk device and file drivers unique to SDOS. Because of this, however, the interface between the hardware and SDOS, the I/O package, is available to the user in source code form to add, delete or modify devices as he sees fit. The third part, the command interpreter, is written primarily in BASIC. This means any command you want to add or modify can be written in BASIC, although the user retains the option to use assembly language as well. For example, the standard FILES command does not have a date search routine. I added a BEFORE, AFTER and FOR <date> extension in a couple of hours, entirely in BASIC.

Robert B. Peirce
McMurray, PA

It's Not in the Stars

I wish to protest the inclusion of the article "Astrology and the Microcomputer" (p. 124) in your March 1981 issue. I think the inclusion of an article on such a dubious subject has no place in a serious publication.

I have no desire to give any refutation of astrology. Organizations such as the American Association for the Advancement of Science's Committee for the Investigation of the Paranormal have done a more complete job than I could present here, including a disconfirmation of Gauquelin's supposed correlations.

What I consider more important is the editorial policy of your journal. I do not understand how anyone involved in such a rational subject as computing could, with integrity, publish an article on such antiscientific subjects as astrology. Superstition has no place in serious journals.

H. Seyward
Scarborough, Ontario

Response:

The reference Mr. Seyward makes is to the committee which published "The Zetetic." The statistical approach used was not always flawless, and further, a number of the "hypotheses" tested had nothing in common with astrology as practiced. (For a refutation of one example of the statistics as published, see Guy le Clercq, "CAO Times" 3(4), 1977.)

As a member in good standing of the American Association for the Advancement of Science and the New York Academy of Sciences, my evaluation of the work of the "scientists" who have chosen to attack astrology is that their knowledge of astrology is too superficial for them to be able to say anything intelligent on the subject. I did not claim in my article, nor do I believe, that astrology is a science; it lacks any paradigm system. Hence, it is inappropriate to label it antiscientific; more properly, it is nonscientific. However, I do find it interesting that Mr. Seyward's letter is loaded with emotionalism, albeit disguised by appropriate invective ("rational"? "dubious"? "serious"?), which would seemingly be inadmissible in a truly scientific discussion.

Dr. J. Lee Lehman
New York, NY

Computer Use Down Under

Since writing my article, "The Micro Down Under" (February 1981, p. 69), I have learned of the good work of the Angle Park Computing Center in Adelaide, South Australia, in promoting the use of computers in schools in that state and in the adjacent Northern Territory. Although sparsely populated, these two regions cover a total area equal to one-third of the continental U.S. and serve 300 schools as far apart as Darwin and Mount Gambier—a distance further than Minneapolis to Houston.

The Angle Park Center operates a microcomputer loan system to more than 70 schools and offers over 100 educational packages. In 1980 they conducted courses at the Center for 9000 students and more than 1000 teachers.

Quite clearly the efforts of Australia's least densely populated states, Tasmania, West Australia and South Australia (plus the Northern Territory), put the remaining states of Australia to shame in the use of computers in schools.

Right now a fierce argument is raging in Australia on questions of literacy (particularly the lack of it) among our school leavers. I believe that this skill is assisted by exposure to computing in schools, especially if the computers are skillfully incorporated into remedial teaching. Therefore, I hope Australia's most populated states, New South Wales, Queensland and Victoria, will soon follow the lead of Tasmania and South Australia and give the micro its rightful place in their education systems.

Colin Keay
Newcastle, N.S.W., Australia

A Frank Assessment

I disagree strongly with Thomas Franks' review of William Barden's *How to Program Microcomputers* (January 1981, p. 241). It is an excellent book for a novice programmer. That book, together with TSC's well-commented source listings, taught me most of what I know about assembly-language programming —not a good subject to learn without a teacher, but I did it, thanks to Barden's book.

Tom Boyd
Surrey, England

Call For Manuscripts

Kilobaud Microcomputing is looking for business articles!

Businessmen in all fields are beginning to take notice of the microcomputer. They are eager to know which computers, peripheral equipment and applications software will let them take full advantage of this new tool. What knowledge do you have to share?

Here are the kinds of articles that we want you to write for us:

- Are you a businessman with a system up and running? We want to know how it works. What were your expectations? Have they been fulfilled? Did you find the software that you wanted? What problems have you had? How did you overcome them? What recommendations do you have for other businessmen?
- We want reviews from a businessman's perspective of specific hardware and software. If you've recently bought a new product and want to tell others how great—or poor—it is, *Microcomputing* will provide you with a forum.
- What programs have you written to meet your specific needs? Perhaps another businessman can use them, too. Even if he can't, your program may serve as a springboard for other ideas.
- Perhaps you aren't using your micro for business, but know a company that is. Trot on down with your pencil and notebook, and find out what they're up to. While they might not have the time to write up their experiences, they might be more than willing to tell somebody else about them. And an outside observer will often be able to see things with a unique and valuable perspective.

Don't worry if you're not a professional writer. That's what we editors are here for. And we'll be more than happy to send you a copy of our writer's guidelines.

Send your manuscripts and correspondence to:
Kilobaud Microcomputing
Pine St.
Peterborough, NH 03458

Edited by Linda Stephenson

New Printers from Centronics and Dataroyal
Business Computer
PET Floppy Disk
Atari Memory Expansion

Graphics Printer

Centronics Data Computer Corp., Hudson, NH 03051, has announced its Model 739 printer. The new printer produces correspondence printing for text and data processing, plus graphics designed to meet the needs of the small-business-system user. Standard features include pin-addressable graphics with a resolution of 74 dots per inch horizontal by 72 dots per inch vertical, a monospaced print speed of 100 cps and an acoustical cover that provides improved single-sheet paper loading and reduces noise.

The Model 739 prints 7×8 dot matrix characters with true underline at 10 and 16.5 characters-per-inch for standard data processing tasks, and generates N×9 dot matrix proportional characters with true descenders for text editing applications. The printer creates subscripts and superscripts by performing forward and reverse half-line steps under manual or software control. It accepts 8-1/2×11 inch cut sheet, 9 inch pin-to-pin fan-fold and roll paper to 8-1/2 inches wide. Model 739 serial versions include a standard 2K buffer suitable for screen dump applications.

The new printer is priced under $1000. Reader service number 470.




Centronics Model 739 printer.

Intelligent Matrix Printer

The IPS-5000-C intelligent dot-matrix printer offers increased programmable memory, graphics, international character sets, print-style selection and other features to handle complex printing applications and communications protocol. Thanks to its open-ended direct-memory-access architecture, the IPS-5000-C printer has the potential for unlimited memory expansion. The standard IPS-5000-C contains up to 12K of EPROM and 4K of RAM. The 80-column printer costs $1510; 130-column unit is $1695.

Dataroyal, Inc., 235 Main Dunstable Road., Nashua, NH 03060. Reader service number 480.

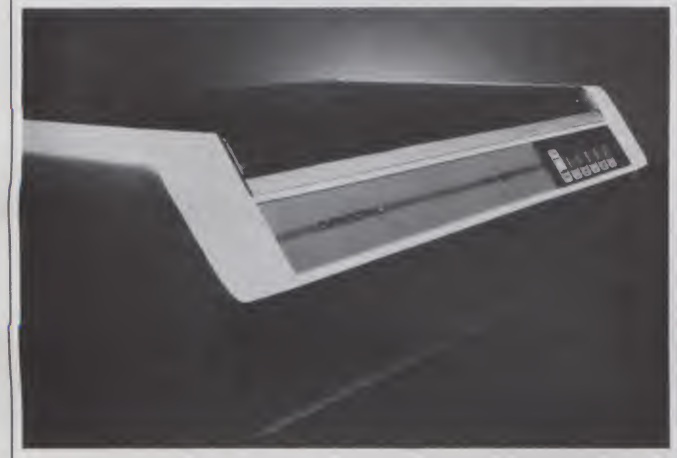

Dataroyal's new IPS-5000-C high-capacity printer.

Versatile Business Computer

The Expander S-100 computer is built around a single board that contains a Z-80A CPU, keyboard circuitry, interrupt, video circuitry, real-time clock, parallel printer interface, RS-232 serial interface and full color circuitry. It requires a video display and media storage for operation. Features include standard 80×24 screen format, upper/lowercase, 4K ROM monitor, 64K RAM (expandable to 512K), video output and color graphics using 256 colors and a complex tone generator with internal speaker. Keyboard capabilities include calculator keypad, two programmable function keys and four cursor control keys.

The versatile Expander functions as a process control or monitoring system, as a data communications terminal or for other applications that do not require a video display. It has room for several S-100 boards, so the computer can be configured to perform word processing and high resolution color graphics. All CP/M and MP/M software written for the Z-80 will run on the Expander. It is sold with 24K Microsoft BASIC-80 (disk version) and 10K Microsoft BASIC-80 (cassette tape version). Price is $2200.

Micro-Expander, Inc., 6835



The Expander from Micro-Expander, Inc.

W. Higgins Ave., Chicago, IL 60656. Reader Service number 468.

Floppy-Disk System for PET

PEDISK II is a low-cost, high-performance floppy-disk system for the Commodore PET. It is available with 5-1/4-inch or eight-inch disk drives. A small disk controller board mounts inside the machine and contains the PDOS software ROM and all the disk control circuitry. One, two or three drives connect to the PEDISK II controller board, providing a fast mass-storage system for the 2000, 4000 or 8000 series PET. PEDISK II is compatible with all Commodore disk systems, and both can be used simultaneously in the same machine. With appropriate software, files can be transferred from one disk system to the other. The eight-inch PEDISK II system can exchange diskettes with large computers. The PDOS software links the resident BASIC to the disk system by adding a new repertoire of disk commands.

The 143K single-drive 5-1/4-inch system sells for $595; the 572K dual-drive quad-density system is priced at $1195.

CGRS Microtech, Inc., PO Box 102, Langhorne, PA 19047. Reader service number 476.

Atari Memory System

The Axlon 256 memory system increases storage capacity of the Atari 800 computer from 48K of random access memory up to 256K, providing a 500 percent expansion of the RAM memory currently available in the Atari system. The new Axlon product functions as a very fast disk. When compared with the Atari 800 disk drive, the Axlon system improves disk transfer time from 756 bytes per second to 128,000 bytes



PEDISK II floppy-disk system from CGRS Microtech, Inc.

MODEL III DISK DIRECTORY PROGRAM

Catalogue your Diskettes with this easy to use Catalogue program for Model III Disk systems. Can run on as little as a 32K 1 Drive system. Help you keep track of ALL of your programs.

ONLY $19.95

MODEL III SPEED UP!

Load in the 500 Baud system tapes in 1/3 the time with copy III. This utility will read in your 500 baud system tapes. and then write them out at 1500 baud. This gives you backup protection as well as speeding up your tapes. A must for all Model III Cassette users!

ONLY $14.95

B.T. Enterprises ✓124
171 Hawkins Road
Centereach, New York 11720
(516) 981-8568 (Voice)
(516) 588-5836 (Data)
MNET-70331, 105

VISA
Master Charge

NYS res. add appr. tax

Dealers Inquiries Welcome Add $2.00 S & H

Are you playing with a full deck?



If you are holding an AIM, SYM, KIM, PET or OSI, then you need our 1981 Product Guide to fill your hand.

The Computerist deals only superior products:

Dram Plus — RAM, EPROM, Programmer and I/O.
Video Plus — Instant video up to 132 by 30, plus communication and keyboard ports.
Mother Plus — Supports multi-board expansion, cassette control and more.
Proto Plus — Add custom circuits easily.
Power Plus — Triple voltage supply.

Why stand when you can take a guaranteed hit?

For the best deal in town, write or call for our free 1981 Product Guide

✓336

THE COMPUTERIST®
34 Chelmsford St., Chelmsford, MA 01824
(617) 256-3649

✓See List of Advertisers on page 194

MICRO

The **6502/6809** Journal

- **For the serious user of the Apple, PET/CBM, OSI, Atari, AIM, SYM, and KIM.**
- **The *premier* 6502 resource journal—now also covering the 6809!**
- **Internationally respected by professionals in business, industry, and education.**



Order today!

We accept VISA & Mastercard.

$18.00 in the U.S.
$21.00 foreign surface mail
(Ask for air rates)

MICRO
P.O. Box 6502
Chelmsford, MA 01824
(617)256-5515



V.I.P.'s Call A.E.I.

because A.E.I. tests before shipping; has expertise on all items offered; and is price competitive.


NORTHSTAR		**EPSON MX 80 BEST**	CALL
HRZ 1D 32K	CALL	**EPSON MX 70 BEST**	CALL
HRZ 2D 32K	CALL	EPSON MX 100	CALL
HRZ 2Q 32K	CALL	ANACOM	1150
HRZ 2Q 64K	CALL	**MORROW**	
HARD DISK SYSTEM	CALL	DISCUS 2+2 1 DRIVE	$1250
DYNA BYTE		DISCUS 2D 1 DRIVE	935
NEW SYSTEMS	LOW! CALL	DISCUS M26 HARD DISK	3925
TERMINALS		**SYSTEMS GROUP**	
TELEVIDEO 912	CALL	DM 6400 64K 250ns	$595
TELEVIDEO 920	CALL	DMB 6400 64K 250ns	745
SOROQ IQ 120	675	2ND GENERATION— LATEST RELEASES	CALL
HAZELTINE 1500	995	**INDUSTRIAL MICRO SYSTEMS**	
PRINTERS		XLNT PRICES!	CALL
NEC 5510	$2540	SSM—LOWEST PRICES!	CALL
NEC 5520	2900	**SOFTWARE—DISKS**	
NEC 5530	2520	WORDSTAR	330
ALL NEC: INC. TRACT, RIBBON & THIMBLE		GRAHAM DORIAN—LOW!	CALL
TI-820	1640	STRUCTURED SYSTEMS— LOW!	CALL
TI-810	1495	5" DISKS	26
ANADEX DP 9500- or 01	1345	8" DISKS	30



These Fine Products and More

We Will Try To Beat Any Advertised Price

Automated Equipment Inc.
18430 Ward Street, Fountain Valley, Calif. 92708
TOLL FREE ORDERING
(714) 963-1414 (800) 854-7635

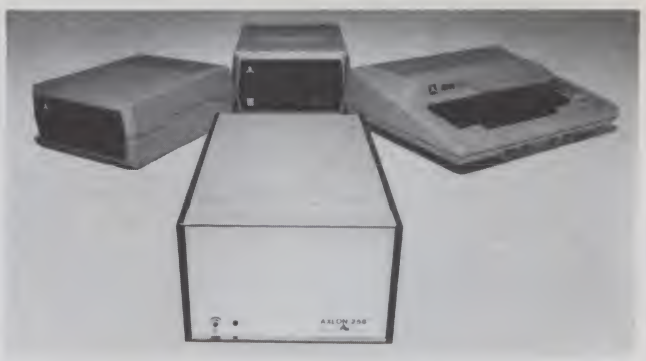

Axlon 256 memory expansion system for the Atari 800.

per second. The 256 system is plug-in compatible with the Atari 800. Installation is accomplished by inserting the system interface card into the second RAM slot in the 800, and the PIA control cable into the Atari control jack. All interface hardware is included with the system and no modifications are required. Axlon also includes a modified DOS with the system.

The system comes with two 32K RAMCRAM modules. Additional modules can be added until the full 256K capacity is achieved. Atari RAM modules can also be used in the Axlon system. The standard system, with 64K of RAM, is $895.

Axlon, Inc., 170 N. Wolfe Road, Sunnyvale, CA 94086. Reader service number 473.

Six-Megabyte Hard-Disk Micro

The smallest and most inexpensive Onyx microcomputer ever, featuring a 5-1/4-inch Winchester hard disk with a capacity of 6M, is now being offered by Onyx Distribution, Inc., 315 South Ellis, Wichita, KS 67211. The Onyx C5000 has a high-speed Z-80 processor and high-density cartridge tape backup. It is compatible with COBOL, Pascal and FORTRAN. The C5000 provides an alternative to floppy-disk systems for small businesses, and is priced at $9500. Reader service number 475.

RAM Expansion System

A dynamic RAM card for System-50 (SS-50 bus) 680X computers is now offered by Percom Data Company, 211 N. Kirby, Garland, TX 75042. The M48DSS can be strapped to reside in any of the 64K banks of a 1M memory space. Operating power for a fully populated card—48K of RAM—is only 5 W maximum.

It features block organization, with RAM ICs organized as three independent 16K blocks. Any block can be mapped into any of the four 16K zones of a 64K address space. On-card circuitry permits deselection of any 8K block from the upper 32K address space. M48DSS cards



The C5000 microcomputer from Onyx Distribution, Inc.

NOW FOR THE TRS-80™ MODELS I & III

LOGICAL SYSTEMS, INC. ANNOUNCES

LDOS

THE TRS-80™ OPERATING SYSTEM WITH:

★ Double Sided & Double Density Support.
★ Hard Drive Support Up To 10 MEGS As A Single Drive.
★ Inter mix 5", 8" and Hard Drive Up To 8 Total Drives.
- A 250 Page Manual
- Complete Technical Information
- A TOLL-FREE 800 Number for Customer Service
- A Full Time Staff to Handle Customer Service
- A Bulletin Board on MicroNet
- A LDOS NEWSLETTER
- A Liberal Update Policy
- An ENHANCED BASIC
- A Complete Job Control Language
- Device Independent
- Media Compatible Model I to Model III
- A One Year Warranty

★ SPECIFIC HARDWARE IS REQUIRED TO UTILIZE THESE FEATURES.

The Ultimate In Operating Systems Model I & III . . . Only **$149.00**

FOR FURTHER INFORMATION CONTACT THE DISTRIBUTOR NEAREST YOU:

(West)
LOBO DRIVES INT'L
354 S. Fairview Ave
Goleta, CA 93117
(805) 683-1576

(Central)
GALACTIC SOFTWARE LTD. ↙330
11520 N. Port Washington Rd.
Mequon, WI 53092
(414)241-8030

(East)
MISOSYS
5904 Edgehill Dr.
Alexandria, VA 22303
(703) 960-2998

DEALER INQUIRES WELCOME

TRS-80™ a trademark of Tandy Corp.

LDOS is a product of LSI Inc.

See List of Advertisers on page 194

KB BOOK NOOK

Special Pre-publication Offer!!

3 NEW BOOKS From KILOBAUD

Save $$ by reserving your copies now!

ANNOTATED BASIC VOL I—BK7384—Purpose is the key word here! There are programs for the business owner, the student, the do-it-your-selfer, and a couple just for fun. The listings are formatted for easy reading, tracing and typing. Each is fully documented to teach the principles used. You may learn digital electronics...or how to survey! If you're a beginner at BASIC, there's more good news—these programs have been selected, aranged and fully anonotated to teach you the BASIC language from simple statements to complex concepts. Regular price. $8.95, **PREPUBLICATION SPECIAL OFFER ONLY $7.45.***

ANNOTATED BASIC VOL II—BK7385—The purpose lives on, with BASIC instruction on graphics, strings, and high level math, demonstrated in programs that help you measure rough lumber, learn the Constitutional Amendments, make a flight plan, or calculate the orbit of a satellite. Regular price $8.95, **PREPUBLICATION SPECIAL OFFER ONLY $7.45.**

*Formerly titled ""**Programs with Purpose**"

—SAVE $3.50—
ORDER BOTH VOLUMES NOW
AND PAY ONLY $14.40
(ORDER BK738401)

KILOBAUD KLASSROOM ——THE BOOK——

KILOBAUD KLASSROOM—BK7386—Here it is, the complete Kilobaud Klassroom series. No more flipping through back issues or messy files of photocopies—it's all in book form now. Reedited, updated, with glossary, index and question and answer sections included. Regular price $10.95. **PREPUBLICATION SPECIAL OFFER ONLY $9.45.**


(ALL BOOKS WILL BE SHIPPED IN AUGUST)

*Use the order card in the back of this magazine or itemize your order on a separate piece of paper and mail to Kilobaud *Microcomputing* Book Department • Peterborough NH 03458. Be sure to include check or detailed credit card information.

No C.O.D. orders accepted. All orders add $1.00 handling. Please allow 4–6 weeks for delivery. Questions regarding your order? Please write to Customer Service at the above address.

PRICES SUBJECT TO CHANGE WITHOUT NOTICE

FOR TOLL FREE ORDERING CALL 1-800-258-5473

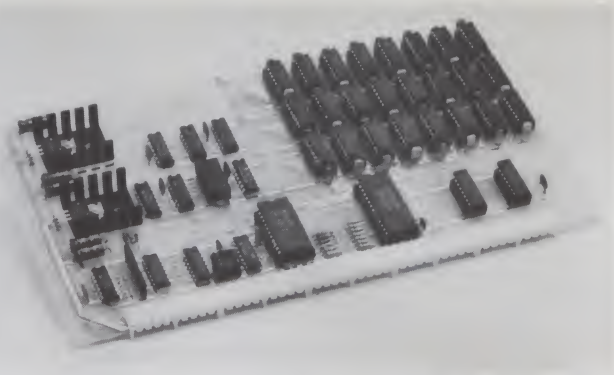

Percom Data's 48K dynamic RAM card.

are fully tested and burned in The user's manual includes application instructions, schematics and other drawings, plus assembly-language listings of 6800 and 6809 diagnostic memory test programs.

Prices are $499.95 for 16K, $599.95 for 32K and $699.95 for the 48K card. Reader service number 472.

Graphics and Text for Host Computers

The RG-B1 512H×480V Graphics Generator adds graphics capability to any computer via its RS-232 port. The RG-B1 is a smart, standalone graphics generator that accepts high level commands from a host computer and displays text and graphics on a standard 525-line TV monitor. Graphics capability includes point-to-point drawing, circles, reverse video, variable-sized ASCII characters, selective erase and rectangular fill. Unit price is $1450.

Raster Graphics, PO Box 23334, Tigard, OR 97223. Reader service number 479.

Direct-Connect Modem for Apple II

A direct-connect telephone modem for use with Apple II and Apple II Plus microcomputers has been introduced by ESI Lynx, 123 Locust St., Lancaster, PA 17602. It plugs into Apple's peripheral slots and the telephone line; no acoustic coupler is used. Its case is styled to match the Apple II. Standard features include originate/answer, programmable word length, parity, number of stop bits and full/half duplex. Auto-dial and auto-answer are extra. The



RG-B1 graphics generator from Raster Graphics.



ESI Lynx direct-connect modem.

Lynx package contains all needed hardware and software, plus an instruction manual that lists free bulletin-board telephone numbers and describes how to call these and other services, including The Source and CompuServe. Price is $289.95. Reader service number 467.

Low-Cost Printer

Microtek, Inc., 9514 Chesapeake Drive, San Diego, CA 92123, announces a new low-cost 80-column dot matrix printer. The Bytewriter-1 accepts single sheet or roll paper up to 8-1/2 inches wide, and prints at 60 lines per minute using a 7×7 dot matrix. The Bytewriter-1 interface is similar but not identical to a Centronics parallel interface, and has been designed to operate with the Apple II, Atari 400/800 and all models of the TRS-80. The print mechanism and logic board are designed and manufactured in the U.S. Price is $299. Reader service number 465.

Portable RS-232 Memory System

Braemar Computer Devices, Inc., 11950 12th Ave., S., Burnsville, MN 55337, is now offering the MTL 900 portable mini-cassette system for remote data gathering, memory down-loading and remote program updating. This new memory system unit uses a Braemar mini-digital cassette read/write unit with RS-232 interfacing. The necessary cable and connector assembly is included. Each miniature cassette holds up to 86K at 800 bpi, and the sys-



Bytewriter-1 from Microtek, Inc.

TEXAS COMPUTER SYSTEMS
Offers Lowest Prices on
TRS-80
COMPUTERS

Model II 64K $3349 — Free with purchase: 1 Box of 10 Diskettes a $69 Value
Epson Printers $ Call
Model III 16K $849
Model III 32K 2 Disks $2100
Color Computer 4K Lev. I $329
16K Ex. Basic $489
Radio Shack Stereos. Radios Discounted Call for discount on orders over $100.

For fast, efficient service, we can air freight from Dallas to major a/p near you. Call for information.

- Payment Money Order, Cashier's Check Certified Check Personal checks take 3 wks VISA MC add 3%
- Prices subject to change any time
- No tax out-of-state Texans add 5%
- Delivery subject to availability
- Shipping extra quoted by phone

TEXAS COMPUTER SYSTEMS ✓328
Box 951, Brady Texas 76825
Toll Free Number 800-351-1473
Texas Residents 915-597-0673

progressive computing

Z-FORTH IN ROM by Tom Zimmer
5 to 10 times faster than Basic. Once you use it, you'll never go back to basic! $ 75.00
source listing add $ 20.00

OSI FIG-FORTH True fig forth model for 0S65D with fig editor named files, string package & much more $ 45.00

TINY PASCAL Operates in fig-forth, an exceptional value when purchased with forth.
TINY PASCAL & documentation $ 45.00
FORTH & TINY PASCAL $ 65.00

SPACE INVADERS 100% machine code for all systems with 64 chr. video. Full color & sound on C2, 4P & 8P systems. The fastest arcade program available. $ 14.95

PROGRAMMABLE CHARACTER GENERATOR $ 99.95
Use OSI's graphics or make a complete set of your own! Easy to use, comes assembled & tested.
2 Mhz. boards $109.95

PROGRAMMABLE SOUND BOARD $ 74.95
Complete sound system featuring the AY-3-8910 sound chip.
Bare boards available. $ 29.95

32/64 CHARACTER VIDEO MODIFICATION $ 39.95
Oldest and most popular video mod. True 32 chr. C1P, or 32/64 chr. C4P video display. Also adds many other options.

ROMS!!!
Augment Video Mod with our Roms. Full screen editing, print at selectable scroll, and many more features.
Basic 4 & Monitor $ 49.95
Basic 3 $ 18.95
All 3 for $ 65.00

65D DISASSEMBLY MANUAL. by Software Consultants
First class throughout. A must for any 65D user $ 24.95

NUMEROUS BASIC PROGRAMS, UTILITY PROGRAMS AND GAMES ALONG WITH HARDWARE PROJECTS. ALL PRICES ARE U S FUNDS. Send for our $1.50 catalogue with free program (hardcopy) Memory Map and Auto Load Routine.

CHARGE VISA

OSI Software & Hardware ✓202
3336 Avondale Crescent
Windsor, Ontario, Canada N9E 1X6
(519) 969-2500
3281 Countryside Circle
Pontiac Township, Michigan 48057
(313) 373-0468

✓See List of Advertisers on page 194



Braemar's portable MTL 900 mini-cassette system.

tem has a data transfer rate of 2400 baud. Power is normally supplied through the interface cable from the host equipment. Internal ac or battery power supplies are optional. The MTL 900 is priced at $425. Reader service number 471.

Surge Control

A new power surge control unit, designed for use with existing 120 V terminal (multiple outlet) strips, has been introduced by RKS Enterprises, Inc., 643 South 6th St., San Jose, CA 95112. The Surge Sentry Model SS-120-P protects a number of small computers and data communications, medical or other microprocessor-controlled equipment from destructive voltage transients. It plugs into any one of the outlets on an existing terminal strip, providing continuous surge protection through each of the other outlets on that strip. The Model SS-120-P detects and shunts all unwanted or potentially dangerous voltage transients in picoseconds. Price is $69.50. Reader service number 482.

One Megabyte 8/16-Bit Development System

Syst/M Four is an 8085/8088 development system using 1M of static RAM in a single enclosure. The IEEE S-100 system takes advantage of a dual processor CPU card containing a 6-MHz 8085 and a 6-MHz 8088 to allow running either eight- or 16-bit software from a single disk, providing an ideal environment for upgrading eight-bit programs to 16 bits. Standard software includes CP/M 2.2 and CP/M 86 from Digital Research, eight- and 16-bit Pascal compilers from Sorcim, and Trans86 by Sorcim, which allows 8080 or Z-80 source to be translated into 8086 source. Standard hardware includes two double-density eight-inch floppy-disk drives and an eight-inch 10M hard disk. Two programmable interrupt controllers, a real-time clock/calendar with battery backup, three cascadable 16-bit interval timers and a 9511 math processor are also standard. Price is $19,950.


G & G Engineering, 2806 Marina Blvd., San Leandro, CA 94577. Reader service number 469.

Percussion Synthesizer

The Rhythm Box is a new computer peripheral that synthesizes the sounds of seven different percussion instruments—bass drum, wood block, snare drum, short cymbals, long cymbals, hand-clap and tom-tom. It is easy to program in Level II BASIC or assembly language; a single OUT instruction generates any combination of percussion sounds plus a loudness control for rhythmic emphasis. It was designed for game players, computer-music enthusiasts, music teachers and professional musicians who want to create anything from a simple, repetitive rhythmic pattern to a long, continuously varying percussion score. The Rhythm Box can be used alone or with other music peripherals, and a second unit can be added for stereo.

It comes with a phono jack for connection to your audio system, a UL listed power supply, 60-day warranty, user's manual including BASIC and assembly-language software examples, and a wide selection of rhythm charts for every rhythm from waltzes to rock. The Model RBX-S Rhythm Box connects to standard 9600 baud serial interface. Price is $182.

Newtech Computer Systems, Inc., 230 Clinton St., Brooklyn, NY 11201. Reader service number 474.

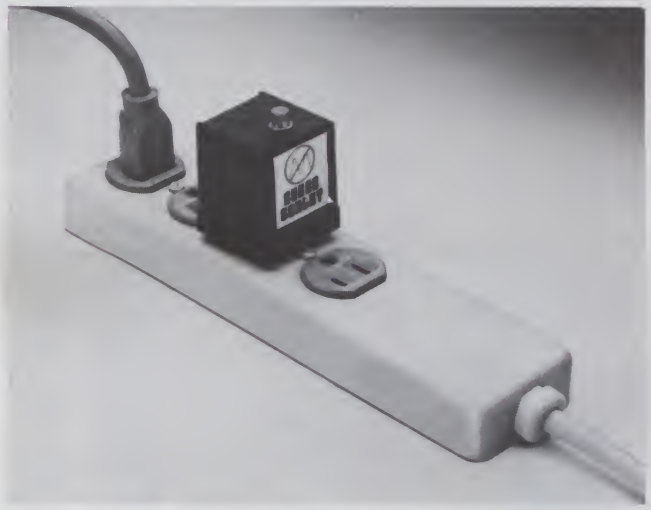

Surge Sentry from RKS Enterprises.



Lauren Kawakami, a part owner of G & G Engineering, with their Syst/M Four development system.

I.E.E.E. 696 ads

S-100 BOARDS

6809 C.P.U. CARD

PROM PROGRAMMING CARD

SOUND EFFECTS CARD

BREADBOARD CARD

& MORE

CALL OR WRITE:

Ackerman Digital Systems, Inc.
110 N. York Rd., Suite 208
Elmhurst, IL 60126 ✓261
(312) 530-8992

Designed for your . . .

TRS-80™

the *PHOTOPOINT*™ Light Pen*

a whole NEW concept in computer application

- Just plugs into your TRS-80 with disk or without! (Does not void warranties.)
- Programs with 3 lines in Basic!
- Comes with two Programs
- Complete instructions!!
- Just point to play!
- Often eliminates confusing keyboard from games, education, or multiple choice.

All you need to get up and running the same day you receive your *PhotoPoint* is included. For only . . .

$19.95 Complete

Order NOW from
MICRO MATRIX
P.O. Box 938
Pacifica, CA 94044

**Dealer inquiries welcomed!*

✓134

CHEAP CHIPS . . . ARE NO BARGAIN

WE'LL BEAT ANY DEAL FOR COMPARABLE CHIPS

BUYING ADD-ON MEMORY? GET THE BEST!!!

Memory failures cost you time and money. Japanese 16k RAM chips have a one-to-ten in-service failure ratio to U.S. chips--from a study by R. Anderson, Computer Div., Hewlett-Packard, reported in ***The Economist***, 4-26-80.

We offer 4116 chips by Fujitsu, NEC, Hitachi, Toshiba and Mitsubishi . . . for most popular computers and expansion memory boards, including:

***Apple *All TRS-80's *New Pet *Heath H-89**
***Superbrain *Expandoram *Many Others**

4116 DYNAMIC RAMS — **THE BEST**
200nsec Plastic $27.70, **Ceramic $37.95**
150nsec Plastic $31.95, **Ceramic $41.95**

STATIC RAMS
2114 450nsec $3.30, 300nsec $3.90; 2101 $2.90.

EPROMS (450 nsec std; ask for hi-speed if required) 2708 $4.80; 2716 5V+12V $9.40; 2716 5V $9.70; 2732 $18.90.

We'll beat any legitimate price for comparable chips. Hi-volume users, dealers, or clubs, ask for quantity discounts. SHIPPING: to $25, $2; to $50, $1; over $50, **FREE.** COD: +$1.40.

DISCOUNTS ON TOTAL: over $100, 5%; over $200, 10%.

MINIS & MICROS INC. • 29486 Trailway
Agoura, CA. 91301 • (213) 342-4535
CA. residents add 6% sales tax ✓391

2 YEAR WARRANTY ★ CALL US ANYTIME

TOP QUALITY CHIPS AT UNBEATABLE PRICES

SOFTWARE AUTHORS AND VENDORS

We are looking for programs of quality and usefulness for the TRS-80* Color Computer and Commodore VIC 20. Of particular interest are programs dealing with home finance and education. Please send documentation and/or sample to:

GENERAL VIDEOTEX CORPORATION
377 PUTNAM AVENUE
CAMBRIDGE, MASS. 02139 ✓392
(617) 491-3393

Publishers of the Kussmaul Encyclopedia™
"So simple even a grownup can use it."™
*TRS-80 is a trademark of Tandy Corp.
Encyclopedia is a trademark of General Videotex Corporation.

FACTORY PRIME STATIC RAM CHIPS

2114 Super Low Power 200ns. 1Kx4 . . . . . $ 2.90
6514 CMOS 300ns. 1Kx4 . . . . . $ 6.90
6116 CMOS 200ns. 2Kx8 . . . . . $22.50
Add $5.00 Handling on Orders Under $200.00

FACTORY PRIME From the same shipments used in GIMIX Professional quality boards

32KB STATIC RAM CARDS
for the SS50 and SS50C BUS
(16KB — $298.12), (24KB — 348.14)
(32KB — $398.15)

NEW! 64KB BATTERY BACK UP CMOS RAM CARDS
Two independently addressable 32KB blocks, each with extended addressing.
(56KB - $994.56), (64KB - $1088.64)

2MHZ 6809 56KB SS50 SYSTEMS $2498.29

DISK SYSTEMS AVAILABLE

GIMIX INC. ✓301

1337 W. 37th Place • Chicago, IL 60609
(312) 927-5510 • TWX 910-221-4055
The Company that delivers.
Quality Electronic products since 1975.
GIMIX® and GHOST® are Registered Trademarks of GIMIX INC.

'68' MICRO JOURNAL ™

6800-6809-68000

★ The only ALL **68XX** Computer Magazine

Foreign Orders—Add:
Air Mail $35.00 /Year-Surface $12.00 /Year

Canada & Mexico Add $5.50 to USA Rate

1-Year **$18.50** 2 Years **$32.50**
3 Years **$48.50**
OK, PLEASE ENTER MY SUBSCRIPTION
Bill my: M/C ☐ — VISA ☐

Card # _____
Expiration Date _____
For ☐ 1-Yr. ☐ 2 Yrs. ☐ 3 Yrs.
Enclosed: $ _____
Name _____
Street _____
City _____
State _____ Zip _____

'68' MICRO JOUNRAL ™
3018 Hamill Road
HIXSON, TN 37343 ✓132

You can keep up with the fast paced world of microcomputing. Subscribe to Kilobaud Microcomputing.

Kilobaud Microcomputing has more articles to keep you informed than any other microcomputing journal—three times more than the leading competitor. Kilobaud Microcomputing has programs that are useable and save you money. Plus Kilobaud Microcomputing has reviews, new products, ads to examine and news columns all designed to keep you up to date.

Subscribe today

IF YOU'VE GOT

OSI

We've got great products for you!

OS-65D V3.2 DISASSEMBLY MANUAL 60 page manual, complete with cross reference listings. Fully commented. **$24.95.**

REF COMMAND UNDER BASIC Lists line numbers, variables, constants for 65D or 65U. **$29.95.**

SPOOLER-DESPOOLER UTILITY Super fast. Frees up screen, feeds data to serial or parallel printers. **$59.95.**

FIG FORTH UNDER OS-65U Runs under multi-user, hard disk systems with all the extras. **$79.95.**

VIDEO ROUTINE Convenient control of variable screen parameters. May be connected to graphics resolution booster. **$24.95** or **$29.95.**

GRAPHICS RESOLUTION BOOSTER Hardware to boost screen resolution by 8 times to 128 x 128. **$49.95.** With video routine and software extensions **$79.95.**

Write or call for free product catalog and get all the details.

SOFTWARE CONSULTANTS
7053 Rose Trail ✓213
Memphis, Tn. 38134
901/377-3503

SURPLUS ELECTRONICS

ASCII  ASCII

TRS-80* COMPATIBLE,
IBM SELECTRIC®-BASED
I/O TERMINAL with
ASCII conversion installed: **$645.00**

Many Other Items Available:
Tape Drives; Cable;
Cassette Drives; Wire; Power Supplies (5 volt 35 amp, others); Displays; Cabinets; Transformers; Heat Sinks; Printers; Components.

Send for free catalog.

WORLDWIDE ELECT. INC.
130 Northeastern Blvd.
Nashua, NH 03062 ✓122

Phone orders accepted using VISA or Master Charge
TOLL FREE 603-889-7661 • 1-800-258-1036
TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation

✓See List of Advertisers on page 194

Edited by Linda Stephenson

CP/M Business Planner
Magic Typewriter
Hard Hat Accounting
Data Abstractions

Business Planning System

Target is a business planning system designed by Advanced Management Strategies, Inc. (AMSI), of Atlanta and now sold by Westico, 25 Van Zant St., Norwalk, CT 06855. Target users can quickly analyze past business activities and project likely future performances. User errors are easily corrected because Target can display or print the entire set of data entries, calculation rules and report specifications. Calculation commands are entered in English sentences. Target makes business planning easier by performing conditional tests on data calculations. It uses functions such as cumulative, minimum, maximum, greater of, lesser of and grow by, which are not found in many other systems. Target is a compiled system running under the CP/M operating system and is intended for use on the TRS-80 Model II, Intertec Superbrain, Zenith Z-89 and Vector System III. Other microcomputers using CP/M and with 56K memory and 200K disk storage can support Target. Price is $195. Reader service number 495.

Versatile Software System

Magic Typewriter version 2.2 provides word processing and database management in one program. As a word processor, it is simple to use: most commands are either single words or mnemonics. The user can move blocks of text, selectively load or delete, find material from disk files without disturbing the file in memory and swap character strings in one line, a block of lines or throughout the entire text, with a single command.

As a database management system, Magic Typewriter lets the user customize the system to his own needs. Records can be up to 200 characters, and output can be custom-formatted. The same address list, for instance, can be printed as a phone list or mailing labels, sorted by city, state, zip code, expiration date or any other criterion the user wants to specify. The system has an extremely rapid sort, and can scan either an entire record or specific fields within a record. A file can be scanned in a few seconds. The price is $175.

California Digital Engineering, Box 526, Hollywood, CA 90028. Reader service number 483.

Accounting Program for Construction Businesses

Charles Mann & Associates, Micro Software Division, 7594 San Remo Trail, Yucca Valley, CA 92284, has announced a new applications package for the construction industry. The Construction Accounting System, for Apple II, Apple II Plus and Apple III computers, is a full General Ledger, Payroll, Job Cost Accounting and Subcontractor Records system. The system also includes its own report preparation system which can be used to design special account reports, proposals, job bids and annual reports.

General Ledger allows the payment of job-related costs on a planned basis corresponding to work schedules or payment receipts. The Payroll system allows for monthly, bimonthly, biweekly or weekly payrolls, with automatic posting to the General Ledger and the Job Cost subsidiary accounts. Job Cost permits continuous inspection of each job's fiscal progress. Jobs can have a custom list of up to 99 expense classifications. The system prepares fiscal reports suitable for project management and lender reimbursement. The Subcontractor system creates subsidiary accounts. Reports easily locate jobs under contract with each subcontractor, change order amounts, payments-to-date by job and contract costs remaining. Posting to the system is automatic and annual preparation of IRS-required 1099 forms is simplified. Price is $359.95. Reader service number 492.

Data Abstraction Language

DATABS is a data abstraction language which runs under CP/M disk-operating systems, and is suitable for control and systems programming. The built-in types of DATABS are Boolean, character, single-byte integer, double-byte integer and string. Data abstractions allow the implementation of user-defined types using a dynamic storage mechanism. Data abstractions are a step beyond structured programming. Programs created using DATABS are easier to design, understand and modify. DATABS supports UNIX-style command line arguments and I/O redirection with < and >. A stream abstraction allows terminal and disk input/output. A system with at least 40K is required.

Package includes a CP/M-compatible disk containing the compiler, built-in type and run-time support library, stream abstraction and command line processor, along with a 73-page user's manual. The price is $49.50.

Softronics, 36 Homestead Lane, Roosevelt, NJ 08555. Reader service number 484.

Music and Animation

Rainbow Writer is a graphics, text, music and animation computer-program-development aid which runs on the Apple II and Apple II Plus. It uses simple commands and menu selections to create special effects featuring color, animation, letters, shapes and sounds. Rainbow Writer's large-scale graphics are particularly suitable for generat-

ing text and animation for educational applications, and its sound effects help to maintain a child's interest and participation in the program. Rainbow Writer creates animation by using two distinct areas of memory in the Apple that are used to produce images on the television monitor. Rainbow Writer rapidly shifts the image-making back and forth between the two areas to create the impression of movement.

Users can define their own character fonts, or choose among nine sizes and 18 different colors of upper/lowercase English and Greek letters. Musically, Rainbow Writer offers six chromatic octaves, and special tonal effects such as note sustain. Sequential notes can be stored on disk for playback as a tune on the Apple's internal speaker. The price is $39.95.

Personal Software, Inc., 1330 Bordeaux Drive, Sunnyvale, CA 94086. Reader service number 499.

Job Cost System Now in PL/1

Microcomputer Consultants, PO Box T, 1623-A 5th St., Davis, CA 95617, has completed conversion of its Job Cost Control and Analysis System (JCC) to PL/1-80. JCC is suitable for use in any job-oriented business. It allows the user to track and control expenditures of jobs in progress, and to monitor the profitability of each job. Potential cost overruns are identified early so that corrective action can be taken. JCC can be used to control the Jobs Accounts Receivable. It provides information on employee performance suitable for use in employee profit-sharing plans.

Software written in PL/1 offers several major advantages to end users. It is fast, reducing processing time. A PL/1 program is already compiled, and takes up less RAM than a similar program written in BASIC. All invalid entries are detected as soon as they are made, and the operator receives an easily-understood explanation of what went wrong. The new version of JCC utilizes the Micro B + file-access routine from Faircom. Micro B + provides fast file-access time, and eliminates the need to sort or reorganize files. JCC runs under the CP/M 2.2 operating system, and requires at least 56K of RAM. Eight-inch, single-sided, single-density diskette is $600. Reader service number 488.

Graphing Program for the Apple

Muse Software, 330 N. Charles St., Baltimore, MD 21201, is offering Data Plot for 48K Apple microcomputers with Applesoft in ROM. Easy-to-use menu-driven options provide a graphing tool that can be used immediately by anyone who needs to plot numerical information. The user's manual is written in a tutorial format, with step-by-step pictures that match actual sample data files contained on the program disk. Plot displays range from single line or bar charts to multiple line, additive bars, as well as mixed line and bar formats. Scatter diagrams and pie charts are easily created. Basic statistics are calculated for each display. Automatic and manual scaling and labeling are provided. The disk costs $59.95. Reader service number 491.

Database for Apple Literature

A rapid-retrieval database for the complete Apple literature through 1980 has been developed. Each entry in the database consists of the article title, author name, periodical name, date of issue and page numbers. A search program on the disk asks the user to input a word of interest, such as ROM or GRAPHICS. A search then begins through five years' accumulation of data on disk, and a list of entries is printed out on screen or printer. The product is intended for users with large numbers of magazine back issues who want to retrieve Apple articles quickly. Annual updates will be available. The price for the database on mini-floppy diskette is $60. It requires 48K of RAM and Applesoft in ROM.

Connecticut Information

WORDPROPACK

WORDPROPACK and JINSAM are trademarks of Jini Micro-Systems, Inc.
WordPro is a trademark of Professional Software, Inc.

OFFICIALLY APPROVED BY COMMODORE

"This module is much more powerful than you can imagine."

Robert Baker, February, '81 KILOBAUD

With WORDPROPACK, JINSAM's WORDPRO interface, you obtain the ultimate "state of the art" business tool. And, WORDPROPACK is just one of seven accessory modules and systems available with JINSAM Data Manager.

JINSAM is Commodore approved. JINSAM is available for all Commodore 32K microcomputers.

Send only $15 for your own 84K 5 program demonstration system or

SEE YOUR NEAREST COMMODORE DEALER FOR A DEMONSTRATION

JINI MICRO-SYSTEMS, INC.

P.O. Box 274 KW ● Riverdale, N.Y. 10463
PHONE: (212) 796-6200

353

See List of Advertisers on page 194

Systems, 218 Huntington Road, Bridgeport, CT 06608. Reader service number 486.

Apple Communications Packages

Two new communications programs are available from Microcom, Inc., 89 State St., Boston, MA 02109. Micro-Courier lets owners of Apple II microcomputers transmit charts, graphs, correspondence, VisiCalc reports and entire programs to other Apple computers over standard phone lines. These electronic mail transmissions can be sent automatically, allowing the owner to take advantage of low night phone rates. The program is menu-driven and simple to use.

Micro-Telegram is for any business that uses TWX, Telex and Mailgrams. It lets an Apple II computer access Western Union services worldwide. You can send Mailgrams, send and receive TWX, Telex and international cables, and receive Infomaster up-to-the-minute news, stock, foreign exchange, gold, futures, sports and ski reports. You can also edit messages on the screen and send them automatically. Micro-Courier and Micro-Telegram are each priced at $250. Reader service number 487.



The Micro-Telegram program from Microcom.



Micro-Courier package from Microcom.

Graphics Language for PET

A new interactive language for PET/CBM microcomputers is available from Abacus Software, PO Box 7211, Grand Rapids, MI 49510. Vigil (Video Interactive Game Interpretive Language) is an easy-to-learn graphics and game language that lets you quickly create interactive applications. Vigil features more than 60 commands to manipulate graphics figures on the screen, double-density graphics and access to two event timers. Vigil is available on cassette, and is ready to run on any 40-column PET/CBM with at least 8K of memory. The price is $35. Reader service number 498.

PET Program Printing

Program Printer provides PET users with formatting and printing of BASIC programs. It places each BASIC statement on a separate print line and inserts blanks to improve clarity. It also breaks lines of multiple BASIC statements onto separate print lines.

There are three versions of Program Printer available. One version is used to print to an IEEE device via the GPIB, and sells for $25. The version used to output to an RS-232 ASCII printer, at any rate from 50 to 4800 baud, is priced at $75. The Program Printer used with an IBM Selectric 2741 or COPE 1030 printer/terminal sells for $125. The Program Printer package includes a user's manual and floppy diskette, plus a backup diskette.

PhD Associates, Inc., 107 Fordwich Crescent, Rexdale, Ontario, M9W 2T6, Canada. Reader service number 489.

Phone Bill Analyzer

Long Distance Analyzer, a business program for disk-based TRS-80s, streamlines accounting for long-distance telephone costs. Calls are grouped and totalled by number to help you cost-account, bill clients and investigate unfamiliar numbers. Matching your bill with your file of recognized numbers, the program identifies where your calls go. Your usage patterns are analyzed by area code, state and WATS zone. The "recognized number" file prints out as a directory. Minimum requirements are 16K, Level II and one disk drive; printer is optional. Disk for Models I and III is $135. Model II disk is $155.



Program Printer from PhD Associates.

IN THE BEGINNING WAS...

THE WORD™
© OASIS SYSTEMS 1981

$75.00 COMPLETE

The WORD is a software toolbox for *Spelling Checking/Correction and Wordcounting*, the perfect companion to your CP/M™ Word Processing System. It includes...

- Ultra-fast spelling checking program with
- 40,000 word dictionary
- "Lookup" program finds possible correct spellings
- Fast, accurate word counting program

OASIS SYSTEMS
2765 REYNARD WAY, SAN DIEGO, CA. 92103 (714) 291-9489

Golden Braid Software, PO Box 2934, Sarasota, FL 33578. Reader service number 490.

Disk Operating System

MuDOS is a CP/M-compatible operating system offering higher throughput, increased reliability and extra professional features for both single-user and multiple-user environments. MuDOS is ideal for use with the MuSYS Net/80 and EXP/80 network slave processors. The system may be customized to any Z-80 hardware configuration and used in place of CP/M, MP/M and CP/Net. Program loading under MuDOS is six times faster than CP/M. File processing functions average three to five times faster. MuDOS uses the extra registers and instructions available on the Z-80 to speed processing of operating system calls. It features a buffer manager, a totally reentrant file manager and optional multiple print queuing. Price is $300 for the minimum system configuration.

MuSYS, 1451 Irvine Blvd., Suite 11, Tustin, CA 92680. Reader service number 496.

Four Atari Game Programs

Manhattan Software, PO Box 35, Pacific Palisades, CA 90272, has begun issuing a series of programs for the Atari computer. Gin Rummy 3.0, with color card graphics and sound, plays a full regulation game of Gin, and can hold its own against even skilled Gin players. Priced at $19.95, the program requires 32K and one joystick.

Casino Blackjack/Counter, a simulation of playing at a casino table, has card graphics to show five hands dealt, and the user plays the center hand while the computer plays the rest. The program teaches card-counting, which is claimed to give the player a statistical advantage over the house in some situations. Priced at $19.95, for 24K and one joystick.

Labyrinth Run is a test of skill and coordination, in which the player uses the joystick to guide a fast-moving runner through twists, turns, reverses and slaloms, with thunderous crashes when the runner hits a wall. Three skill levels. $14.95, for 16K memory and one joystick.


Concentration, with full-color graphic symbols, is a computer version of the classic match-the-card game. Two-person competition, in 16K or 24K. Priced at $14.95, the game requires two joysticks. Reader service number 485.

Bowling System for PET/CBM

A complete scoring system for bowling league secretaries is now available from Harry H. Briley, Box 2913, Livermore, CA 94550. The programs run on a 32K PET with disk and printer, and will handle scratch and handicap bowling leagues with up to 24 teams. A smaller version will handle 12 teams on a 16K



MuDOS from the MuSYS Corporation.



SPECIAL DELIVERY

WORDPROCESSING
- POWER -
for the TRS-80®

"...If you're presently looking for a mailing list processor, this represents the current state of the art."
80 MICROCOMPUTING - 80 REVIEWS - JULY 1980

MAILFORM is data entry at its best, just fill in the form! FAST, EASY to use functions include: search, sort, extract, page forward and back. 'Transparent cursor', insert/delete characters, and MORE!

MAILRITE prints 'personalized' form letters by inserting information from MAILFORM into Electric Pencil®, Scripsit®, or BASIC text files. Print letters, labels, even envelopes! Boldface, underscore, change margins, pause, print 'unprintable' characters, and MORE!

XTRA! includes: MAILFORM; MAILRITE - with capability of printing variable text from a 'key' file; MAILABEL - 1, 2, 3, or 4 across label printer; and MAILSORT - sort a full 40 track double density data diskette in only 48K!

ALL MACHINE LANGUAGE
means unsurpassed
SPEED, RELIABILITY & EASE OF USE

For VISA, Master Card & COD orders only
Call NOW - TOLLFREE
(800) 824-7888
ASK FOR OPERATOR 203
California (800) 852-7777
Hawaii & Alaska (800) 824-7919
For more information call (214) 233-3998
(Requires min 32K single disk drive)

FOR THE MODEL I & III
SPECIAL DELIVERY $125
XTRA SPECIAL DELIVERY ..$199
FOR THE MODEL II
SPECIAL DELIVERY $199
(Requires Mod II DOS version 2.0)
TRS-80 is a registered trademark of Tandy Corp.

VISA master charge

software concepts
385
13534 Preston Rd. Suite 142
Dallas, Texas 75240


Dealer Inquiries invited

See List of Advertisers on page 194

FOR ONLY $129.95 Learn Computing From The Ground Up

Build a Computer kit that grows with you, and can expand to 64k RAM, Microsoft BASIC, Text Editor/Assembler, Word Processor, Floppy Disks and more.

EXPLORER/85



1. Plug in Netronics's Hex Keypad/Display
2. Add Level B to convert to S100
3. Add 4k RAM
4. Plug in Level E here; accepts *Microsoft*, BASIC or Editor/Assembler in ROM
5. Add two S100 boards
6. Add you own custom circuits (prototyping area)
7. Connect terminal


Here's the low cost way to learn the fundamentals of computing, the all-important basics you'll need more and more as you advance in computer skills. For just $129.95 you get the advanced-design Explorer/85 motherboard, with all the features you need to learn how to write and use programs. And it can grow into a system that is a match for any personal computer on the market. Look at these features: *8085 Central Processing Unit*, the microprocessor "heart" of the Explorer/85. (Join the millions who will buy and use the 8080/8085 this year alone!).... *Four 8-bit plus one 6-bit input/output ports* from which you can input and output your programs, as well as control exterior switches, relays, lights, etc. ... a cassette interface that lets you store and reload programs you've learned to write ... deluxe 2,000 byte operating system/monitor makes it easy to learn computing in several important ways: • It allows simpler, faster writing and entering of programs • It permits access by you to all parts of the system so you can check on the status of any point in the program • It allows tracing each program step by step, with provision for displaying all the contents of the CPU (registers, flags, etc.) • ... and it does much more!

You get all this in the starting level (Level A) of the Explorer/85 for only **$129.95.** Incredible! To use, just plug in your 8VDC power supply and terminal or keyboard/display — if you don't have them, see our special offers below.

☐ Level A computer kit (Terminal Version) ... **$129.95** plus $3 P&I.*
☐ Level A kit (Hex Keypad/Display Version) ... **$129.95** plus $3 P&I.*

LEVEL B — This "building block" converts the motherboard into a two-slot S100 bus (industry standard) computer. Now you can plug in any of the hundreds of S100 cards available.

☐ Level B kit ... **$49.95** plus $2 P&I.*
☐ S100 bus connectors (two required) ... **$4.85** each, postpaid.



LEVEL C — Add still more computing power; this "building block" mounts directly on the motherboard and expands the S100 bus to six slots.

☐ Level C kit ... **$39.95** plus $2 P&I.*
☐ S100 bus connectors (five required) ... **$4.85** each, postpaid.

LEVEL D — When you reach the point in learning that requires more memory, we offer two choices: either add 4k of a memory directly on the motherboard, or add 16k to 64k of memory by means of a single S100 card, our famous "JAWS."

Level D kit: (CHECK ONE) ... ☐ 4k on-board ... **$49.95** plus $2 P&I.* ☐ 16k S100 "JAWS" ... **$149.95** plus $2 P&I.* ☐ 32k S100 "JAWS" ... **$199.95** plus $2 P&I.* ☐ 48k S100 "JAWS" ... **$249.95** plus $2 P&I.* ☐ 64k S100 "JAWS" ... **$299.95** plus $2 P&I.*

LEVEL E — An important "building block:" it activates the 8k ROM/EPROM space on the motherboard. Now just plug in our 8k Microsoft BASIC or your own custom programs.

☐ Level E kit ... **$5.95** plus 50¢ P&I.*

Microsoft BASIC — It's the language that allows you to talk English to your computer! It is available three ways.

☐ 8k cassette version of Microsoft BASIC: (requires Level B and 12k of RAM minimum; we suggest a 16k S100 "JAWS" — see above) ... **$64.95** postpaid.
☐ 8k ROM version of Microsoft BASIC: (requires Level B & Level E and 4k RAM; just plug into your Level E sockets. We suggest either the 4k Level D RAM expansion or a 16k S100 "JAWS.") ... **$99.95** plus $2 P&I.*
☐ Disk version of Microsoft BASIC: (requires Level B, 32k of RAM, floppy disk controller, 8" floppy disk drive) ... **$325** postpaid.

TEXT EDITOR/ASSEMBLER — The editor/assembler is a software tool (a program) designed to simplify the task of writing programs. As your programs become longer and more complex, the assembler can save you many hours of programming time. This software includes an editor program that enters the programs you write, makes changes, and saves the programs on cassettes. The assembler performs the clerical task of translating symbolic code into the computer-readable object code. The editor/assembler program is available either in cassette or a ROM version.


☐ Editor/Assembler (Cassette version: requires Level "B" and 8k (min.) of RAM — we suggest 16k "JAWS" — see above) ... **$59.95** plus $2 P&I.*
☐ Editor/Assembler (ROM version, supplied on an S100 card; requires Level B and 4k RAM (min.) — we suggest either Level D or 16k "JAWS") ... **$99.95** plus $2 P&I.*

8" FLOPPY DISK — A remarkable "building block." Add our 8" floppy disk when you need faster operation, more convenient program storage, perhaps a business application, and access to the literally thousands of programs and program languages available today. You simply plug them into your Explorer/85 disk system — it accepts all IBM-formatted CP/M programs.

☐ 8" Floppy Disk Drive ... **$499.95** plus $12 P&I.*
☐ Floppy Controller Card ... **$199.95** plus $2 P&I.*
☐ Disk Drive Cabinet & Power Supply ... **$69.95** plus $3 P&I.*
☐ Drive Cables (set up for two drives) ... **$25.00** plus $1.50 P&I.*
☐ CP/M 2.2 Disk Operating System, includes Text Editor/Assembler, dynamic debugger, and other features that give your Explorer/85 access to thousands of existing CP/M-based programs ... $150.00 postpaid.

NEED A POWER SUPPLY? Consider our AP-1. It can supply all the power you need for a fully expanded Explorer/85 (note: disk drives have their own power supply). Plus the AP-1 fits neatly into the attractive Explorer steel cabinet (see below).

☐ AP-1 Power Supply kit (8V @ 5 amps) in deluxe steel cabinet ... **$39.95** plus $2 P&I.*



NEED A TERMINAL? We offer you choices: the least expensive one is our Hex Keypad/Display kit that displays the information on a calculator-type screen. The other choice is our ASCII Keyboard/Computer Terminal kit, that can be used with either a CRT monitor or a TV set (if you have an RF modulator)

☐ Hex Keypad/Display kit ... **$69.95** plus $2 P&I.*

☐ ASCII Keyboard/Computer Terminal kit featuring a full 128 character set, u&l case, full cursor control, 75 ohm video output, convertible to baudot output, selectable baud rate, RS 232-C or 20 ma.I/O, 32 or 64 character by 16 line formats ... **$149.95** plus $3 P&I.*



☐ Steel Cabinet for ASCII Keyboard/Terminal ... **$19.95** plus $2.50 P&I.*
☐ RF Modulator kit (allows you to use your TV set as a monitor) ... **$8.95** postpaid.
☐ 12" Video Monitor (10MHz bandwidth) ... **$139.95** plus $5 P&I.*
☐ Deluxe Steel Cabinet for the Explorer/85 ... **$49.95** plus $3 P&I.*
☐ Fan for cabinet ... **$15.00** plus $1.50 P&I.*



ORDER A SPECIAL-PRICE EXPLORER/85 PAK — THERE'S ONE FOR EVERY NEED.

☐ **Beginner Pak** (Save $26.00) — You get Level A (Terminal Version) with Monitor Source Listing ($25 value) AP-1, 5-amp. power supply, Intel 8085 Users Manual .... (Reg. $199.95) SPECIAL **$169.95** plus $4 P&I.*
☐ **Experimenter Pak** (Save $53.40) — You get Level A Hex Keypad/Display Version) with Hex Keypad/Display, Intel 8085 User Manual, Level A Hex Monitor Source Listing, and AP-1, 5-amp. power supply .... (Reg. $279.95) SPECIAL **$219.95** plus $6 P&I.*
☐ **Special Microsoft BASIC Pak** (Save $103.00) — You get Levels A (Terminal Version), B, D (4k RAM), E, 8k Microsoft in ROM, Intel 8085 User Manual, Level A Monitor Source Listing, and AP-1, 5-amp. power supply .... (Reg. $439.70) SPECIAL **$329.95** plus $7 P&I.*
☐ **Add a Rom-Version Text Editor/Assembler (Requires levels B and D or S100 Memory)** ... **$99.95** plus $2 P&I.*

Starter 8" Disk System – Includes Level A, B floppy disk controller, one CDC 8" disk-drive, two-drive cable, two S100 connectors; just add your own power supplies, cabinets and hardware ... ☐ (Reg. $1065.00) SPECIAL **$999.95** plus $13 P&I.* ☐ 32k Starter System, **$1045.95** plus $13 P&I.* ☐ 48k Starter System, **$1095.95** plus $13 P&I.* ☐ 64k Starter System, **$1145.95** plus $13 P&I.*
☐ Add to any of above Explorer steel cabinet, AP-1 five amp. power supply, Level C with two S100 connectors, disk drive cabinet and power supply, two sub-D connectors for connecting your printer and terminal .... (Reg. $225.95) SPECIAL **$199.95** plus $13 P&I.*
☐ **Complete 64K System** Wired & Tested ... **$1650.00** plus $26 P&I.*
☐ Special! Complete Business Software Pak (Save $625.00) — Includes CP/M 2.2 Microsoft BASIC, General Ledger, Accounts Receivable, Accounts Payable, Payroll Package ... (Reg. $1325) SPECIAL **$699.95** postpaid.

*P&I stands for "postage & insurance." For Canadian orders, double this amount.

Continental Credit Card Buyers Outside Connecticut:

TO ORDER Call Toll Free: 800-243-7428 KB7

To Order From Connecticut, or For Technical Assistance, Call (203) 354-9375

CP/M is a reg. trademark of Digital Research

★ (Clip and mail entire ad) ★

SEND ME THE ITEMS CHECKED ABOVE

Total Enclosed (Conn. Residents add sales tax): $_____
Paid by:

☐ Personal Check ☐ Cashier's Check/Money Order

☐ VISA ☐ MASTER CARD (Bank No. _____)

Acct. No. _____ Exp. Date _____

Signature _____

Print Name _____

Address _____

City _____

State _____ Zip _____

NETRONICS Research & Development Ltd.
333 Litchfield Road, New Milford, CT 06776

PET, using cassette data storage.

Entry of weekly scores results in a scored and handicapped printed summary. Provision is made for forfeits, blinds, partial absences, snapout errors, postponements, team ties, individual ties, subs, name changes, drops, ineligibles, messages, display of secretary's lane and lane assignments anywhere in a 98-lane house. A year-end sweeper program that runs off the final data disk is available, as is a complete archive program that will read each week's disk record for data on each bowler. This data will provide a custom summary at the end for each league member and team. Prices start at $40. Reader service number 494.

Recover Erased CP/M Files

What do you do after entering "ERA*.BAS" instead of entering "ERA*.BAK", besides cuss? Now the UNERA program can be used to recover one or more of those erased programs. Just enter "UNERA (filename)" and the UNERA program will recatalog the (filename) back on the disk directory. The UNERA program can also work its way through a disk directory and display each erased file name, allowing the user to recatalog the file if desired. Another handy feature is that the program lets the user list the program action on the printer. The UNERA program works on both multidisk and single-disk systems that use a standard CP/M disk directory. The eight-inch disk in standard CP/M or 5-1/4-inch disk for North Star CP/M is $36.50.

Elliam Associates, 24000 Bessemer St., Woodland Hills, CA 91367. Reader service number 493.

Word Processing

Select is an easy-to-use word processing system that includes a built-in interactive tutorial system designed to train a new operator in about 90 minutes. It operates with single-key mnemonics. To create a new document, type C; to delete, insert, move, copy, append or to key any of the other commands, simply enter the first letter of that command. All of Select's commands are explained on the first line of the screen. Select includes an integrated spelling dictionary, which is called up by typing S. Tell the speller the name of the document to be corrected, and Superspell compares the contents of the document with its dictionary at 10,000 words per minute. Superspell then reports how many words in the text are incorrect, and which words they are. It then takes you to the text containing the errors, so you can replace the misspelled words one at a time.

Select produces a screen image of tabs, margins, paragraph indentations and line justifications, including automatic centering and left and right margin justification. It also features word-wrap, pagination using either words or numbers, and easily-inserted, logical commands for boldface, underline, subscripts and superscripts. Select for Z-80-based microcomputers is priced at $595; the Apple version is $395.

Select Information Systems, Inc., 919 Sir Francis Drake Blvd., Kentfield, CA 94904. Reader service number 497.

Data Management

Info80 is an automatic information filing and information management system designed to run on the TRS-80 Model I and Model III. The system creates an encyclopedia of information and references which can be quickly located at electronic speeds. It supports continuously-variable record input length, and automatically creates and extends disk files. Info80 features absolute cross-referencing with an infinitely expandable database. Two global commands locate either general or specific information, automatically spanning any number of diskettes. Info80 is available in object code from Bluebird's Computer Software, 2267 23rd St., Wyandotte, MI 48192. The price is $100 on data diskette, or $115 on a TRSDOS diskette. Reader service number 466.

LOWEST PRICE - BEST QUALITY

NORTH STAR



North Star Horizon 2

2-5¼ Disk Drives
32K Double Den
Factory assem. & tested
Factory guaranteed
List $3695

only **$2697**

POWERFUL NORTH STAR BASIC FREE
SUPERB FOR BUSINESS & SCIENCE

FACTORY ASSEMBLED & TESTED		LIST	ONLY
HORIZON-2-64K-DOUBLE DEN		$4195	$3062
HORIZON-2-32K-QUAD DENSITY		$3995	$2916
HORIZON-2-64K-QUAD		$4495	$3281
HORIZON RAM ASSM	16K = $279		32K = $479
HORIZON RAM ASSM	48K = $679		64K = $879
HORIZON DISK DRIVE SALE			
DOUB DEN		SAVE!	$ 445
NORTH STAR HARD DISK 18 Mb		$5375	$3923
NORTH STAR TIME SHARING MULTI-USER			CALL

SUPERBRAIN

ZENITH






SUPERBRAIN QD 64K
List $3995 only $2995

Z-89 48K
List $2895 only $2299

TERMINALS Z-19 $725

INTERTUBE III only **$725**

DYNABYTE COMPUTER—SAVE—PHONE



EPSON MX-80—PHONE
ANADEX 9501 $1349
NEC PRINTER $2639
TRACTOR,
THIMBLE,
RIBBON
DIP-81 $395
TEC LETTER QUAL $1599

InterSystems

ITHACA INTERSYSTEMS 2A



Z-80A CPU 4 MHz
64K Dynamic RAM
Front panel
V I/O—with interrupts
FDCII Disk Controller
20 slot motherboard

CALL FOR PRICE—
TOO LOW TO ADVERTISE!

PASCAL/Z + THE FASTEST PASCAL $375
Z-8000 & CACHE BIOS—POWERFUL—PHONE
8086 16 BIT CPU & SUPPORT CARD SEATTLE $695
CALIFORNIA COMPUTER 2210A ONLY $1795

MORROW 8" DISK

DISCUS 2D + CP/M® 600K ONLY $929
DISCUS 2 + 2 + CP/M® 1.2 MEGA B. $1240
ADD DRIVES 2D = $650 2 + 2 = $975
2D-DUAL + CP/M® ONLY $1540

FREE MBASIC FROM MORROW!!



MORROW HARD DISK
26,000,000 BYTES!!
LIST $4995 ONLY $3919
CP/M® IS INCLUDED!

SAVE ON MEMORY AND PROGRAMS

SYSTEMS MEMORY 64K A & T 4mHz	$590	WORD STAR	$315
SYSTEM MEMORY 64K BANK SELECT	$740	SPECTRUM	$269
ITHACA MEMORY 8/16-bit 64K	$845	COMPUPRO	SAVE
SEATTLE MEMORY 8/16 BIT 16K	$249	EZ-CODER Translates English to BASIC	$71
SSM KITS Z-80 CPU	$221	ECOSOFT FULL ACCOUNTING PKG	$355
VIDEO BRD V83 4Mhz	$412	BOX OF DISKETTES	$29
ANADEX PRINTER DP-9500-1	$1349	SECRETARY WORD PROCESSOR	The Best! $99
CAT NOVATION MODEM	$169	GOFAST NORTH STAR BASIC OPTIMIZER—FAST	$71
ECONORAM 2A 8K ASSM	$179	Which Computers are BEST? BROCHURE	FREE
NSSE 1-22 & P01 TERRIFIC PROGRAMS	ONLY $10. EACH	North Star Documentation refundable	w/HRZ $35
NORTHWORD $329 MAILMAN $246			
INFOMAN	$411		

TARBELL COMPUTER-PHONE

AMERICAN SQUARE COMPUTERS BEATS ADV. PRICES

square American Computers

56

919-889-4577 KIVETT DR. JAMESTOWN N.C. 27282 919-883-1105

® CP/M is a registered trademark of Digital Research, Inc.

Color Your Apple-II With This Micro Paint Set

Micro-Painter from Datasoft

Micro-Painter is a program that lets you "paint" bounded areas—any area completely bounded by a black line—on your television, using any of 21 colors.

The program, written by Bob Bishop, is for the Apple-II with 48K or an Apple-II Plus disk, 13-sector system. It includes a 5-1/4 inch floppy disk, plus a 32-page instruction manual. It is packaged in an attractive box protected by plastic shrink wrapping, and retails for $35.

To get the hang of Micro-Painter, you choose from a selection of full-screen pictures drawn in black and white. You then use Micro-Painter to change the white areas to the color of your choice.

It is indeed fascinating to watch Micro-Painter in action. In its normal mode of operation you position a cursor anywhere on the screen, using your paddles or a joystick. You select the color that you want to paint with, using the Apple keyboard. Then, you "paint" simply by pressing the button on your paddle or joystick. When this is done, the color that you selected rapidly expands (it seems like magic!) from the cursor point to fill the entire bounded area surrounding the cursor. You can then move the cursor to another bounded area and repeat the process.

Once an area has been "painted" with a color, you cannot repaint that area with a different color. (You may, however, save a master copy of a picture while it is in the black and white stage. Then, you can recall this master and paint it as many times as you want, using different colors each time.)

Micro-Painter is able to come up with 21 shades of color by blending the six basic colors that the Apple is able to generate in the high-resolution mode. Essentially the trick consists of using alternating colors in alternating pixels to produce a checkerboard arrangement that the eye perceives as a particular shade of color. For example, dark blue is produced by alternating pixels of blue and black.

Some shades are achieved by alternating the color of rows of pixels. For example, blue-violet is produced by displaying a row of pixels using the color blue alternated with a row using the color violet.

It is important to realize that the software does not give the hardware any more capability than it inherently has. When reading advertisements for the Micro-Painter it is easy to assume that the software somehow lets the computer produce more colors than the manufacturer says it is able to produce. It is really a matter of semantics in some respects. At the pixel level, the Apple-II will still only be producing six standard colors when Micro-Painter is in operation. However, at the practical level, the pixel-by-pixel blending of various combinations of the basic colors produces the 21 shades that are touted as colors by the program's promoters.

It always takes two keystrokes to specify a "painting" color. For instance, if you want to specify dark blue, you press the D key followed by the B key. (You can also accomplish this by pressing the B key and then the D key.) Since 21 shades of color may be specified, and each of these may be specified two ways, 42 keystroke combinations can be used to specify colors. Six pages in the manual present the keystrokes required to produce each shade. The large number of pages used is the result of illustrating the actual pixel interlacing patterns of the primary colors used to produce each shade.

The only real criticism I have of this package—and I mention this only as a constructive suggestion—is that it would be nice if the keystrokes required to call out the various shades of color were all summarized on a single page, or, better yet, on a small card. Such a card could be placed on the computer console, and would make initial operation of the package more convenient. Indeed, the rest of the commands associated with the use of Micro-Painter might be placed on such a card. I frankly think that people would truly appreciate the inclusion of such an item in the package a lot more than they are likely to appreciate the six crayons and the magnifying glass that are now included as gimmicks.

Micro-Painter has a special mode of operation that the producer calls "microscope world." In this mode a small portion of the normal screen is magnified so that you can view and alter parts of a drawing on a pixel-by-pixel basis. This enables the computer artist to do precise touch-ups, so to speak. All it takes to switch from the normal viewing/painting mode to the touch-up mode is a press of the space bar on the Apple's keyboard. Thus, it is easy to make a few minor changes at the pixel level, then switch back to see how it affects the overall picture in the regular viewing mode.

You can practice learning how to use Micro-Painter by painting the pictures provided on the disk that holds the program.

What do you do when you think you have had enough practice and want to create your own painted pictures? Why, you just draw your own pictures. You can do this using a graphics tablet. Or, you can draw pictures using a joystick or paddles using the BASIC program supplied in the Micro-Painter manual, if you have Applesoft BASIC on ROM in your system.

If you have a graphics tablet, chances are that your system will draw white lines upon a black background. Since Micro-Painter uses black lines as boundaries of areas to be painted, inverse and fix commands are provided as part of Micro-Painter to convert such drawings to the format required by the program.


So there you have it. With Micro-Painter and your Apple-II you can draw and paint anything you can imagine on your TV screen, using high-resolution graphics. You can save the black and white master of a picture and color it a thousand different ways. Thus, you can experiment with color combinations to your heart's content.

This is a first-class piece of software. Bob Bishop has done another outstanding job of providing a highly useful, functional and well-engineered package. If you need this kind of capability, the package to do it with is here: Micro-Painter.

Nat Wadsworth
Seymour, CT

Save On Radio Shack®

TRS-80™ Computers



Buy Direct From

Pan American Electronics Incorporated

↙71

Discounts • Free Shipping
TOLL FREE ORDER NUMBER
• 800/531-7466 •

Texas & Principle No. 512/581-2765
Telex Number 767339
Dept. 47, 1117 Conway Ave.
Mission, Texas 78572

SEE OUR NEW Showroom & Warehouse in the Dallas - Ft. Worth Metroplex, 2912 N. Main, Ft. Worth, Texas

TRS-80 is Trademark of Tandy Corp.

GO PIGGYBACK!



CENTRONICS

ADD lowercase with our PLUG-IN piggyback board!

9WX7H Dot Matrix $135
5WX7H Dot Matrix $ 95

TWO complete character sets on board:
96 character ASCII **PLUS** choice of
128 character APL, TRS-80/H-19 Graphics or
Scientific. (Customer defined: add $50/set).

Most printers convertible: specify logic board #



SYDNEY SEZ:
Shop Comparatively!

DSE ↙212 **Digital Systems Engineering**

12503 King's Lake Drive, Reston VA 22091 (703) 620-2994

ALSO AVAILABLE: New Centronics and Integral Data Systems printers at 15-20% below list; also, used printers of several makes. **Call for information!**

MasterCard, VISA, Check, MO, PO — All products waranteed 90 days

Storm Coming?


How many times have your plans revolved around the weather? Now you can turn your TRS-80 into a weather forecaster, and stop getting caught in the rain!!

CLIMATE-COMP was created by National Weather Service Meterologist, author and editor David Carman.

THE WEATHER FORECASTER program will give you a short range forecast for your area. Enter a few simple measurements, easily obtained from newspapers or the U.S. Weather Service, to receive a short range forecast for the next six hours.

THE WEATHER PLOT program is the result of years of carefully collected data. At your command are records, charts, graphs, facts and figures on local weather for every major city in the United States. Choose your area of the country and the data files will release a flood of information. Each city is listed with its monthly rainfall, monthly and yearly average temperature, average wind speed, snowfall, heating and cooling degree days, annual average sunshine, humidity and record-breaking temperatures.

CLIMATE COMP for all the information you need to know what the weather has in store for you.



Cassette based: system requires 16K, level II, Pkg. no. 0102R $19.95. Disk based: system requires 32K one disk drive, Pkg. no. 0316RD $24.95.

TO ORDER:
Call toll-free 1-800-258-5473
- orders only -
In New Hampshire
dial 1-603-924-7296


*A trademark of Tandy Corporation

Instant Software™

PETERBOROUGH, N.H. 03458 ↙75

CENTRONICS® 737

the missing link: ...your COMPUTER



E xternal
T extformatting
I nterface

ETI's own **microprocessor intelligence** can put all the power of your 737 Printer at your fingertips...

ETI's pioneering design (patents pending) allows you to **control all the options** of this powerful printer **with simple commands** right from Basic or the body of your wordprocessing text.

Provides **maximum printing speed** with *mainframe-like* dedicated peripheral control and programmability.

Compatible with most popular wordprocessing packages and microcomputer hardware.

Features:
- access to all six fonts of the 737 printer
- true proportional spacing with justification
- superscript, subscript, underlining
- user definable spacing, line centering, form feed
- UPPER/lowercase support also for UPPER-only systems
- optional use of BASIC as a simple but flexible wordprocessor
- no additional cables—Centronics-like edge-card connector

introductory price: $147.

order now directly from us (check, MO, Visa, MC) or your local printer dealer
(N.J. residents please add 5% tax)

master charge

microdome ↙248
CORPORATION
Denville, New Jersey 07834
P.O. Box 392 (201) 627-8554

VISA

↙See List of Advertisers on page 194

4MHZ, DOUBLE DENSITY, COLOR & B/W GRAPHICS . . THE LNW80 COMPUTER



When you've compared the features of an LNW80 Computer, you'll quickly understand why the LNW80 is the ultimate TRS80 software compatible system. LNW RESEARCH offers the most complete microcomputer system at an outstanding low price.
We back up our product with an unconventional 6 month warranty and a 10 days *full refund policy*, less shipping charges.

LNW80 Computer $1,450.00
LNW80 Computer w/B&W Monitor & one 5" Drive $1,914.00
All orders must be prepaid, CA residents please include 6% sales tax.
Contact us for shipping charges

* TRS80 Product of Tandy Corporation.
** PMC Product of Personal Microcomputer, Inc.

COMPARE THE FEATURES AND PERFORMANCE

FEATURES	LNW80	PMC-80**	TRS-80* MODEL III
PROCESSOR	4.0 MHZ	1.8 MHZ	2.0 MHZ
LEVEL II BASIC INTERP.	YES	YES	LEVEL III BASIC
TRS80 MODEL 1 LEVEL II COMPATIBLE	YES	YES	NO
48K BYTES RAM	YES	YES	YES
CASSETTE BAUD RATE	500/1000	500	500/1500
FLOPPY DISK CONTROLLER	SINGLE/ DOUBLE	SINGLE	SINGLE/ DOUBLE
SERIAL RS232 PORT	YES	YES	YES
PRINTER PORT	YES	YES	YES
REAL TIME CLOCK	YES	YES	YES
24 X 80 CHARACTERS	YES	NO	NO
VIDEO MONITOR	YES	YES	YES
UPPER AND LOWER CASE	YES	OPTIONAL	YES
REVERSE VIDEO	YES	NO	NO
KEYBOARD	63 KEY	53 KEY	53 KEY
NUMERIC KEY PAD	YES	NO	YES
B/W GRAPHICS, 128 X 48	YES	YES	YES
HI-RESOLUTION B/W GRAPHICS, 480 X 192	YES	NO	NO
HI-RESOLUTION COLOR GRAPHICS (NTSC), 128 X 192 IN 8 COLORS	YES	NO	NO
HI-RESOLUTION COLOR GRAPHICS (RGB), 384 X 192 IN 8 COLORS	OPTIONAL	NO	NO
WARRANTY	6 MONTHS	90 DAYS	90 DAYS
TOTAL SYSTEM PRICE	$1,914.00	$1,840.00	$2,187.00
LESS MONITOR AND DISK DRIVE	$1,450.00	$1,375.00	---

LNW80

- BARE PRINTED CIRCUIT BOARD & MANUAL $89.95

The LNW80 - A high-speed color computer totally compatible with the TRS-80*. The LNW80 gives you the edge in satisfying your computation needs in business, scientific and personal computation. With performance of 4 MHz, Z80A CPU, you'll achieve performance of over twice the processing speed of a TRS-80*. This means you'll get the performance that is comparable to the most expensive microcomputer with the compatibility to the world's most popular computer (TRS-80*) resulting in the widest software base.

FEATURES:
- TRS-80 Model 1 Level II Software Compatible
- High Resolution Graphics
  - RGB Output - 384 x 192 in 8 Colors
  - NTSC Video or RF MOD - 128 x 192 in 8 Colors
  - Black and White - 480 x 192
- 4 MHz CPU
- 500/1000 Baud Cassette
- Upper and Lower Case
- 16K Bytes RAM, 12K Bytes ROM
- Solder Masked and Silkscreened

LNW SYSTEM EXPANSION

- BARE PRINTED CIRCUIT BOARD AND MANUAL $69.95
WITH GOLD CONNECTORS $84.95

The System Expansion will allow you to expand your LNW80, TRS-80*, or PMC-80** to a complete computer system that is still totally software compatible with the TRS-80* Model 1 Level II.

FEATURES:
- 32K Bytes Memory
- 5" Floppy Controller
- Serial RS232 20ma I/O
- Parallel Printer
- Real Time Clock
- Screen Printer Bus
- On Board Power Supply
- Solder Masked and Silkscreened

LNDoubler & DOS PLUS 3.3D

- Assembled and Tested W/DOS PLUS 3.3D.....$175.00

Double-density disk storage for the LNW Research's "System Expansion" or the Tandy's "Expansion Interface". The LNDoubler™ is totally software compatible with any double density software generated for the Percom's Doubler***. The LNDoubler™ provides the following outstanding features.

- Store up to 350K bytes on a single 5" disk
- Single and double density data separation
- Precision write precompensation circuit
- Software switch between single and double density
- Easy plug in installation requiring no etch cuts, jumpers or soldering
- 35, 40, 77, 80 track 5" disk operation
- 120 day parts and labor Warranty

*** Doubler is a product of Percom Data Company, Inc.

DOS PLUS 3.3D

Micro Systems software's double density disk operating system. This operating system contains all the outstanding features of a well developed DOS, with ease in useability.

KEYBOARD

LNW80 KEYBOARD KIT $84.95

The Keyboard Kit contains a 63 key plus a 10 key, P.C. board, and remaining components.

CASE

LNW80 CASE $84.95

The streamline design of this metal case will house the LNW80, LWN System Expansion, LNW80 Keyboard, power supply and fan, LNDoubler™, or LNW Data Separator. This kit includes all the hardware to mount all of the above. Add $12.00 for shipping

PARTS AVAILABLE FROM LNW RESERARCH
- 4116 - 200ns RAM
  - 6 chip set $26.00
  - 8 chip set $33.50
  - 16 chip set $64.00
  - 24 chip set $94.00
  - 32 chip set $124.00
- LNW80 "Start up parts set" LNW80-1 . . . . . $82.00
- LNW80 "Video parts set" LNW80-2 . . . . . $31.00
- LNW80 Transformer LNW80-3 . . . . . $18.00
- LNW80 Keyboard cable LNW80-4 . . . . . $16.00
- 40 Pin computer to expansion cable $15.00
- System Expansion Transformer $19.00
- Floppy Controller (FD1771) and UART (TR1602) . . . $30.00

LNW RESEARCH CORPORATION ✓198

2620 WALNUT
TUSTIN CA. 92680

ORDERS & INFO. NO. 714-544-5744
SERVICE NO. 714-641-8850

VISA MASTER CHARGE ACCEPTED

UNLESS NOTED ADD $3 FOR SHIPPING

CORRECTIONS

Michael Grady (PO Box 27575, Escondido, CA 92027), author of "Micros Say the Darn'dest Things," (April 1981, p. 92) writes to say that he omitted any means of calling up VB$ verbs (lines 440–530) in his program listing. Although the program works perfectly well as it is, to see some sentences with VB$ verbs appear on the screen, just add the following lines to the program:

```
1261  X = FN R(X)
1262  IF X = <4 THEN X = FN R(X): VP$ = VBS(X):
      KY = 1: GOTO 1320
1341  IF KY = 1 THEN KY = 0: VP$ = VP$ + JS(2):
      GOTO 1570
```

The "Dial-up Directory" column in the April 1981 issue (p. 16) mistakenly credits Digital Equipment Corporation as authors of the CP/M Operating System. Of course, it should have read Digital Research, Inc. (Pacific Grove, CA), who originally wrote the CP/M Operating System for the Heath H-89.

Dr. E. Stanton Maxey, author of "Tracking the Planets," March 1981, p. 130, notes that "the Gregorian conversion, for a reason not clear to me, fails by +1 days for the entire month of September 1900. Otherwise, it is accurate. Listing 1 is accurate for the entire period 1868-1981."

There is an error in the hex dump listing that affects the screen display by not printing the last two characters in "Save It with CASSY," April 1981, p. 41. Location $0F1F_{16}$ should be changed from BD to 8D. With this change, the program works fine.

Dr. Michael Bazaral ("AIM for Total Control," May 1981) informs us that the name of the president of RNB Enterprises is Raymond Bennet, not Michael G. Bennet, as was printed in his article on p. 104.

Jaime Eyzaguirre, a regular follower of the Micro Quiz column, was quick to point out that May's quiz answer contained an error. X(i) should read A(i) on page 243.

```
10 'The Gregorian conversion as published
20 'in Kilobaud March 1981 pp 133
30 'lines 2830 through 2870 fails
40 'for September 1900.
50 'The following has been thoroughly
60 'checked and is accurate.
2830 IJD=367*IY
2840 IJD=IJD-7*(IY+(IM+9)\12)\4
2850 IJD=IJD-3*((IY+(IM-9)\7)\100+1)\4
2860 IJD=IJD+(275*IM\9)+ID+1721029#
2870 IJD=IJD-.5#'half day diff in standard
```

Listing 1.

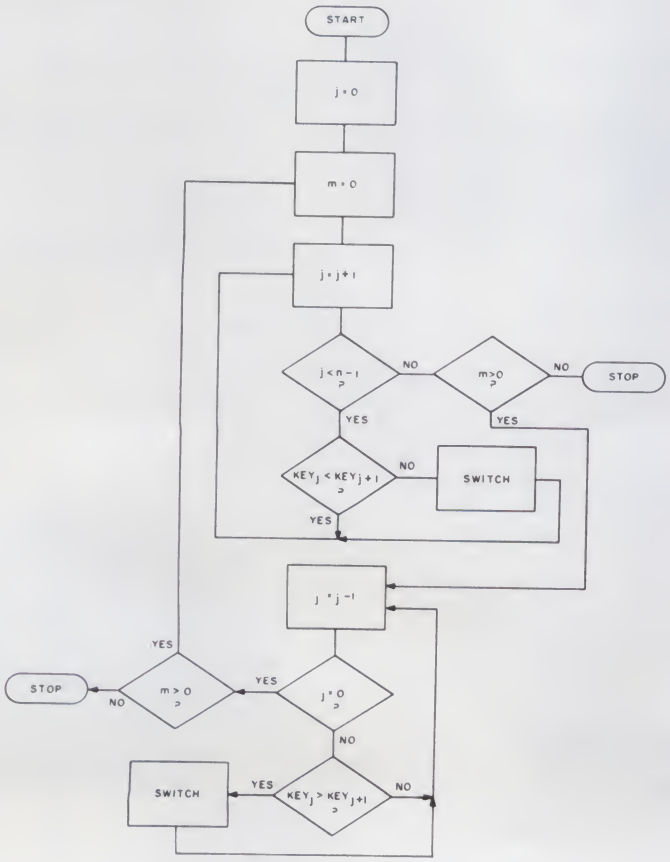


Fig. 1. Two-way bubble sort.

Several of our readers have written in to point out that the captions identifying the two flowcharts (pp. 148 and 149, April 1981, "A Better Bubble Sort") have been switched. Also, the two-way bubble sort flowchart has a line missing at the bottom of the flowchart in the published diagram. It is correct as shown in Fig. 1.

Coauthor Warren A. Harrison states that, concerning the "efficiency" of the bubble sort: "Quicker sorts than the bubble sort and its cousins are available, but the difference is negligible for small lists. Because we usually sort a larger group of data than just a key (e.g., a record), most micros have difficulty in accommodating a larger list than 40 or 50 elements.

"As an example, consider an 80-byte record. Fifty of these would require over 4000 bytes of memory when you include the bookkeeping required to build an array or matrix. Therefore, most sorting tasks with over 50 elements use external sorts such as the good ol' merge sort or radix sort, or one of their cousins, and an external storage device such as tape or disk. This is common practice with even the big machines which may have 'unlimited in-core storage' via virtual memory. Many extremely efficient external sorts exist. However, for the size of the list which we would normally use an internal sort on, the slowness of the bubble sort is not that much of a problem."

Basic Business Software
H-8 Programming for Beginners
Build Your Own Micro

Basic Business Software


E. G. Brooner
Howard W. Sams & Co., Inc., 1980
Softcover, 142 pp., $9.95

The rapid development of the electronics industry has created a paradox in the computer market—we have the hardware, but lack the software to use the equipment to its potential. The business field is probably the most affected industry of all, since the user usually has a small mathematical background with little or no knowledge of computer science, relying mainly on off-the-shelf software. *Basic Business Software* is an excellent guide for the business person who finds himself or herself in this situation.

Ernest Brooner, the president of a computer consultation firm in Kalispell, MT, has written this book for the business person who is considering changing to a computer system, or a person who already has, and who has a basic understanding of computers. He deals with the problems of obtaining satisfactory software and equipment that will allow the user to expand as his business increases. *Basic Business Software* will be most useful when used in conjunction with the North Star Horizon and with computers using Microsoft BASIC.

Chapters 1–4 deal with the purchase of the actual computer and peripheral equipment necessary to make the system practical. As Brooner states, "Although a video terminal is sufficient for hobby uses, a serious business must have a 'hard copy,' as computer persons usually refer to anything printed on paper. And while the hobbyist could fuss with the eccentricities of cassette tape, the disk was the only medium of storage both reliable enough and cheap enough for . . . small businesses," thus making a printer and disk system integral parts of a functional business system.

Brooner also says that software should not be purchased unless the user has seen the program in actual use. Software, as Brooner points out, is the most difficult component of a computer to select.

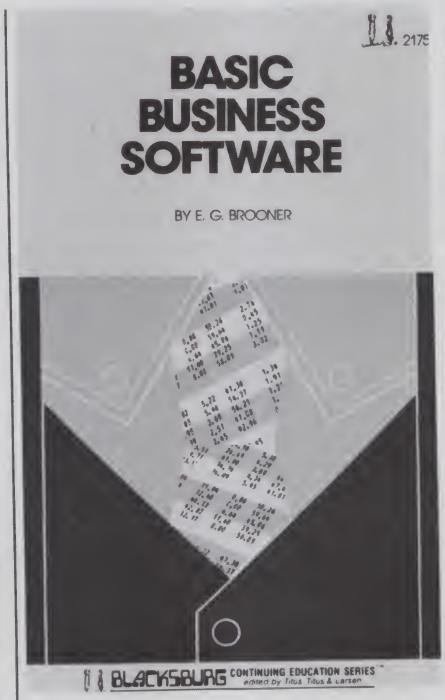

Chapter 4 deals primarily with one of the most essential parts of operation of a computer—customizing purchased software and writing individual programs. To a partially skilled programmer, writing programs designed especially for his needs may be much easier and cheaper than customizing standard software. This is done if, and only if, the programmer takes an organized approach to solving the problem, and knows the abilities of his machine. Business programs as a rule do not require complex mathematics, only basic operations. However, the programmer must have adequate knowledge of sorting techniques and should design the program in a logical manner.

Chapter 5 develops the concepts introduced in the latter chapter through a program, Namelist, which sorts names and addresses in alphabetical order through shell sorting, a technique that arranges data in a certain order as the data is being printed, rather than in storage.

Chapters 6–8 provide several programs involving payrolls, inventories and general ledgers. The text instructs the reader on developing specialized programs of the same type, providing necessary information and possible bugs. The last two chapters introduce computer modeling and the currently hot item, word processing.

Whether a person is considering converting to computers, has just purchased a system and wishes to increase its capacity, or is just interested in computers, *Basic Business Software* by E. G. Brooner is a valuable tool.

Paul D. Tyler
Salt Lake City, UT

H-8 Programming for Beginners

Ron Santore, Don Inman and Bob Albrecht
dilithium Press, 1980
$8.95, paperback

Owners of fully-equipped H8 systems may be astonished to learn that a barebones H8 can be educational and fun. The *Heath Operation Manual* does little to encourage this view although assemblers of the kit will recall the thrill of seeing the initial test message displayed on the LED array, the result of entering a program through the front panel keyboard. This was followed by a memory test routine, another machine-language program. About here you may have been overcome by an urge to understand how these programs work. Here is a book that will help satisfy that curiosity.

This book, written by three experienced microcomputer educators, is a short course in machine-language programming, designed specifically for the H8 computer. As the title suggests, it assumes that the reader has no previous knowledge of programming. It does assume that he has an H8 computer with 4K of memory. No terminal, cassette or disk system is required.

Everything is explained in easily un-

derstood language from bits and bytes in chapter one, through addressing, the PAM-8 monitor and progressing through

```
040.307  041 356 003  LXI H, DODA
040.312  205          ADD L
040.313  157          MOV L,A
040.314  176          MOV A,M
040.315  366 200      ORI 200Q
040.317  062 023 040  STA 040.023
040.322  311          RET
```

Correction to subroutine 1 of Dice program.

```
040.337  041 356 003  LXI H, DODA
040.342  205          ADD L
040.343  157          MOV L,A
040.344  176          MOV A,M
040.345  366 200      ORI 200Q
040.347  062 022 040  STA 040.022
040.352  311          RET
```

Correction to subroutine 2 of Dice program.

```
040.103  117          MOV C,A
040.104  315 260 003  CALL INPUT SUBROUTINE
040.107  271          CMP C
040.110  372 150 040  JM
040.113  302 165 040  JNZ

040.162  303 104 040  JMP
040.177  303 104 040  JMP

040.120  076 100      MVI A,100Q
040.122  315 140 002  CALL BEEP
040.125  076 100      MVI A,100Q
040.127  315 053 000  CALL DELAY
040.132  025          DCR D
040.133  302 120 040  JNZ
040.136  303 100 040  JMP

041.013  346 007      ANI,007
041.015  311          RET
```

Changes to HiLo. Remove time delays from output subroutines 1 and 2 by inserting 311 (RET) at 040.312 and 040.342.

the 8080 op code list, with a heavy sprinkling of exercises, questions and simple programming assignments. The appendix includes 21 pages of answers to questions that appear throughout the text. Other items include 8080 op code definitions, an op code reference table, a brief description of the hexadecimal number system and an ASCII code table.

Game programs are used through the entire book to illustrate programming instructions and techniques. Program complexity increases as new op codes are introduced and culminate in Dice, HiLo and Stars. These final games are, of course, quite primitive, but they do serve as an example of what can be done without a video terminal, printer or any kind of mass storage.

It is, perhaps, unfortunate that programming deficiencies appear in Dice and HiLo. But the beginning programmer can get some real-world experience by figuring out what has to be changed in these two programs to make them run as intended. It is this debugging process that best teaches the important details of programming. (See Listings.)

The descriptive paragraph about the book, appearing on the back cover, indicates that "it not only covers assembly-language programming but also Benton Harbor BASIC." Strictly speaking, assembly-language programming requires the use of an assembler program. Doing it by hand is really machine-language programming, which this book covers effectively. BASIC is not covered, or even mentioned. A minimum H8 system can't handle BASIC.

Chesney Twombly
Kennebunk, ME

TRS-80 Interfacing, Book 2

Jonathan A. Titus, Christopher A. Titus and David G. Larsen
Blacksburg Continuing Education Series
Indianapolis, Howard W. Sams & Co., Inc., 1980
$10.95

Because of the computer's popularity, users of the TRS-80 are faced with an undifferentiated and overheralded output of publishing, much of it by novices and most of it priced at $20 or more. The Blacksburg series has been a continuing and notable exception, with more than two dozen titles covering digital logic, analog circuitry and microcomputer hardware and software.

TRS-80 Interfacing, Book 2, continues in that tradition: down to business, full of facts and written with concerted clarity. Each chapter begins with its objectives—what will be discussed, described, designed and built—and, if the reader is attentive, succeeds in every one.

Book 1 of the series presented the basic concepts of interfacing, a description of the Z-80 processor, breadboarding, software controls and a group of experiments (see the review by Ed Neister, *80 Microcomputing*, September 1980, p. 20). *Book 2* is more intense. It describes open-collector devices, peripheral drivers and transistor arrays and shows complete pin-out diagrams, data and sample applications. Chapter 1 concludes with a discussion of interfacing to house current (and some of the circuit protection necessary), and a list of manufacturers.

The second chapter is the book's star. It deals with the process of real-world, real-time interfacing: analog-to-digital and digital-to-analog conversions and their use. D/A integrated circuits are described, interfaced to the TRS-80 and run through BASIC software. Accuracy is discussed in terms of both the number of bits used in the conversion, and the stability of the power supply and reference voltage. In an interesting turnabout, an interface is shown that uses its own references and accuracy to control a programmable power supply for another piece of equipment!

An interface, plus BASIC and assembly-language software to drive it, is described to run an X-Y graphic plotter. Linear and sine-function programming is demonstrated.

The chapter continues with analog-to-digital conversion; this process, which is more complicated than its converse, is detailed. Eight- and 12-bit converters are put to work measuring temperature and light intensity, along with an exhaustive rundown of the software considerations, including the potential for errors and their solutions. The chapter lists converter manufacturers.


Chapter 3 gives the interfacing process its important perspective, including how the data is sampled, scaled, averaged, filtered and otherwise manipulated to produce accurate and usable results. Readers must grit their teeth and plunge into the mathematics in this chapter, because the authors make clear that responsible results cannot be achieved without correct handling of the raw data produced with the interfacing they have described.

The authors turn from real-world interfacing to machine interfacing. Chapter 4 is a very substantial description of communication and remote control with the computer using parallel-to-serial and serial-to-parallel conversion. Synchronous, asynchronous and addressable receiver/transmitter chips are described, data and pin-outs are presented, along with working circuits and software.

The authors describe the formats, or protocols, of data transmission, including baud rates; start, data and stop bits; and conversions of data in various forms to ASCII. Significantly, the control of D/A and A/D converters in remote locations is demonstrated. The chapter concludes with BASIC and assembly-language software to operate transmission chips.

The main text of the book concludes

Model 6800CL4N CalClock/TIMER



IT'S A HARDWARE CALENDAR/CLOCK

- Keeps date and time without servicing by the computer
- Day-of-week, month/day/year, hour:min:sec (12/24hr.+auto Leap Year)
- Hands off setting/control/access of ALL functions via software
- On-card battery and charging circuit keeps time for months, power off

WITH AN INTERVAL TIMER INCLUDED

- For (TSC/Flex2/9® compatible) printer spooling, multi-tasking, etc.

Fully assembled & tested*	$ 99.95	5" Disk (Flex2☐ Flex9☐)®	$ 10.00
Complete kit*	$ 69.95	Goldplated buss connectors	$ 6.00
Bare board*	$ 35.00	Shipping & handling	$ 3.00

* FULLY DOCUMENTED: instructions; diagrams; theory; more than 20 pages of sample software (automatically puts date in Flex2/9® date buffer, adds time-of-day to assembly listings, maintains constant, current time+date display on top line of CRT). Batteries not included. All IC's socketed.

® FLEX is the registered trademark of Technical Systems Consultants, Inc.

COMPUWARE Corporation
P.O. Box 2710
Cherry Hill, NJ 08003
609-428-2309
↙197

Dealer & Volume Discounts
New Jersey buyers: ADD 5%
Terms: CASH, M/C or Visa
Flex9®☐ Flex2®(default)☐



NEW! for the '89 from

MAGNOLIA MICROSYSTEMS
↙234

DOUBLE DENSITY DISK CONTROLLER

for both 5¼" & 8" drives
only $595 complete
including CP/M™2.2

MAGNOLIA MICROSYSTEMS, INC
2812 Thorndyke W., Seattle 98199
(206) 285-7266 (800) 426-2841

CP/M is a trademark of Digital Research.

No. 6 UNBELIEVABLE OPPORTUNITY!

If You've Written a Useful Program-- We'd Like to Publish It!

We want programs for INDUSTRIAL applications:

JOB COST ESTIMATES
INDUSTRIAL (PROCESS) CONTROL
JOB TRACKING
MACHINE SCHEDULING

Get published and earn royalties! Write for our free Programmer's Kit today.

INSTANT SOFTWARE, INC. ↙75
Submissions Dept.
Peterborough, NH 03458

with a chapter on TRS-80 interrupts. As users of the computer know, the Z-80 has three powerful interrupt modes; they are often disappointed to discover that the designers of the TRS-80 only permitted one such mode (probably the weakest of the three) to be used. Chapter 5 talks about this problem, presents simple mode 1 interrupt examples, and concludes with some hard-wired modifications to the TRS-80 that allow the use of the remaining interrupt modes.

References are given with each chapter, but the extensive appendices presented in *Book 1* are not repeated; only an ASCII chart and a single data sheet are presented here.

In summary, *TRS-80 Interface, Book 2*, is not only an important extension of *Book 1* of its own series, but an expert application manual for home, industrial and laboratory use.

Dennis Bathory Kitsz
Roxbury, VT

Mostly BASIC: Applications for Your PET

Howard Berenbon
Howard W. Sams & Co., 1980
Softcover, $10.95

Twenty-eight chapters, each containing at least one program written specifically for the PET. Real-time programs such as a telephone dialer and a digital stopwatch. Educational programs including foreign-language flash cards. Business programs such as depreciation and amortization schedules. Home utilities like a recipe calculator and a message-taker. Microcomputer hex-to-decimal conversion. A tarot card reader program. Quite an impressive package for $10.95! Is this *the* book for PET owners to have, especially with so few program books available for the PET?

Any collection of programs, especially one written for a specific system, needs to be evaluated from two points of view: the usefulness of the programs and the quality of the programming. Such a book, to be worthwhile, should be valuable to a nonprogrammer. The directions for program entry and operation should be clear and unequivocal. The programs should run on the system without needing any modification, and they should do what they are supposed to do.

Second, a person who has some understanding of the system should be able to learn programming technique by studying the listings in the book. One expects that the author writes efficient programs and uses good programming technique. He should have some interesting wrinkles in the programs from which a reader can learn. The programs should be better than an average reader could write.

Unfortunately, I cannot say that this book scores well either in the usefulness of the programs or the elegance of the programming. Some of the programs in the first section, for example, require an interface through the PET user port. A schematic and parts list are given, but nothing is said about how to construct the interface and very little about how to connect it to the user port. It would require more knowledge than a PET beginner would possess to get these programs running.

The text and instructions with each program are generally clear, but there are some glaring faults. One program's description tells the reader to press control-C to stop the run, and the PET does not have a control key!

Not all the programs do what they are supposed to do. The Digital Stopwatch program does not keep accurate time—it loses 14 seconds per minute. Many of the applications programs are trivial. They perform functions one could perform faster by hand than on a computer.

The programming style is not a good model from which to learn. Two examples: in many programs the author uses a series of lines such as:

```
100 INPUT A
110 IF A=1 THEN 560
120 IF A=2 THEN 600
130 IF A=3 THEN 640
140 IF A=4 THEN 655
```

instead of the much simpler one-liner: 100 INPUT A: ON A GOTO 560,600,640, 655. Likewise, none of the INPUTs are bulletproofed in any of the programs, a necessity when writing for inexperienced PET users!

Several programs use the RND (random) function. The author has chosen to use RND(0) for the seed, instead of the much more truly random sequence generated by RND(-TI).

These quirks and others, including the fact that no attention has been paid to making sure that the PRINT statements come out right on the screen, lead me to conclude that these programs were not, in fact, developed on a PET. It appears to me that they were written on some other computer—perhaps a large mainframe—and checked to see that they conformed to Microsoft BASIC syntax. I do not have the impression that they were actually checked out on a PET. If they had been, the obvious problems would have been evident and easily corrected before publication.

I do not wish to leave the impression that this book would not be useful to anyone. It only costs as much as one good program on tape, and any person may find a program in it which fills a specific need. If a PET owner knows enough about programming to read a listing and be sure it will do the job, he ought to look at the listings in this book. If he can get two programs out of it, it is a bargain. But I could not recommend this book to a person with no PET programming experience.

Brian S. Klinger
Rye, NH

How To Build Your Own Working Microcomputer

Charles K. Adams
Tab Books, 1980
Softbound, $9.95

On the cover of this book is the statement, "A step-by-step, start-to-finish guide to putting together a complete, working microcomputing system!"

My evaluation after reading and studying the book is, "Don't buy this book."

The author takes an 8080 chip set, LEDs and switches and creates a working computer that resembles very closely an Altair or an Imsai computer. Starting with a now-obsolete CPU for a machine base is not the most logical way to construct a computer from scratch. Unless you happen to have an 8080 chip set on hand, with irresistible urge to do something with your chips, don't bother.

A very similar approach to these same problems was taken by Dr. Norm Thagard in two articles published in *Microcomputing* ("Home-Brew Z-80 System," June and July, 1978, p. 26 and 80). However, his design uses the Z-80 as the machine base instead of the 8080. The article is much shorter, better-written and to the point. If you need to learn the 8080 code for some reason, building Norm's Z-80 design is more logical. And at least the Z-80 is still in current production.

In all fairness to author Adams, this presents a problem to every author. He writes a book that may be obsolete before he can get his work into print. This field of microcomputers is moving with a pace that is almost unbelievable. The minimum delay in getting anything published in magazines is about four months, and in book form is even longer. In four to six months anything done now could become obsolete in that time.

I got turned off in the introduction. When you give a book to a teacher to evaluate, please don't leave the verb out of a sentence. This seldom bothers normal reading techniques, but when a teacher has to reread a sentence several times to try to make the sentence convey intelligence, and has to invent the verb for that sentence, you create a framework that makes it very difficult to see how you will teach newcomers to build something as complex as a computer.

Again, in all fairness to author Adams, these errors may be attributed to the production staff, and may not be the author's fault. But as any of us know who have had work published, the printed error is the responsibility of the author, without regard to the actual source that created the error. If you intend to teach newcomers how to build a computer via the printed page, then the errors (all of them) had better be insignificant, and they had better be few.

There are many errors in the book. Some are insignificant, but some are so severe that author Adams can expect many, many letters from builders requesting help. I had two 5 × 8 cards filled with errors that would need explaining to one of my students if he or she were to build this computer using this book. I still had not reached the end of the first phase of the design of the machine, so I quit taking notes on errors that I might have to answer. None of my students were going to build this design if I could talk them out of it.

At the time this book arrived for my evaluation, I was working on a Z-80 design, and since I have no software experience at all with the Z-80 or the 8080, I did use many of the programs that author Adams gives in the book to build some software experience. I am pleased to report that all of the software I tried worked fine.

So unless you have an 8080 chip set that "must be put into operation," and you are far, far beyond the novice or beginner's stage with your hardware (or you have an electronics instructor immediately available to answer all your questions) or you are willing to write author Adams several times to get his help in building his design, use your $10 to better advantage.

George Young
Sierra High School
Tollhouse, CA



VIP's Call A.E.I. ✓96

VIP's customarily need top quality and service within stringent budgetary limits. Naturally, they call A.E.I.

...For software, firmware, or hardware; For custom systems assistance, connectors, interface boards and service; For peripherals, including printers, CRT's, disc drives, or modems; For as little as one part such as a cable or connector, or as much as an entire national computer complex for a multi-branch company.

Item: A.E.I. tests virtually every* item sold, before shipping.

Item: A.E.I. initializes every piece of software, and makes a copy. If you have a problem, A.E.I. can check to locate the problem by using the in-house duplicate, saving you time.

Item: A.E.I. has in-house expertise on every item offered.

Item: A.E.I. prices are competitive with the lowest, no-service, no in-house expertise dealer.

40% OF ALL A.E.I. SALES ARE TO PUBLIC AND SEMI-PUBLIC INSTITUTIONS.

A partial list** of A.E.I. customers who purchased during the last quarter of 1980 includes: University of Nebraska, University of Virginia, U.S. Dept. of Interior, University of Kentucky, University of California, Massachusetts Institute of Technology, U.S. Air Force, Naval Air Development Center, Brown University, University of Oregon, University of Utah, Ohio State University, University of Southern California, California State Dept. of Water Resources, University of Michigan, and Princeton University.

In the private sector, an equal number of major national organizations purchased during the same period.

You can call A.E.I. too!

*With our normal fast shipping, we have time to test; expedited shipment may preclude testing.
**A.E.I. does not wish to imply that any of these fine organizations endorse A.E.I., merely that A.E.I. is proud to have them as customers.

Automated Equipment, Inc.
18430 Ward Street, Fountain Valley, California 92708 (714) 963-1414 (Outside of California (800) 854-7635)

Communication Arts, Huntington Beach, Ca.

✓See List of Advertisers on page 194

CALENDAR

Personal Computer Show

The 4th Personal Computer World Show will be held at the Cunard Hotel, Hammersmith, London, from Sept. 10–12. Further information can be obtained by writing Timothy Collins, Personal Computer World Show, 11 Manchester Square, London W1E 2QZ.

IEEE Computer Society Conference

"Productivity—An Urgent Priority" is the theme of the IEEE Computer Society Compcon Fall '81 to be held Sept. 14–17 at the Capital Hilton Hotel, Washington, DC. Contact Compcon Fall '81, PO Box 639, Silver Spring, MD 20901, 301-589-3386.

/usr/ Group

The Unix commercial association /usr/ group will meet July 9–10 at the Los Angeles Marriott Hotel to discuss the needs of users and vendors of systems which use Unix operating systems and the C programming language. The two-day meeting will feature speakers, break-out group sessions and committee discussions. For more information, write /usr/ group, PO Box 8570, Stanford, CA 94305.

Computer Summer Camp

This summer youngsters can again sign up for an overnight camp in Moodus, CT, where the main activity will be computers. This unique recreational and educational experience is directed by Dr. Michael Zabinski, Professor at Fairfield University.

The 1981 National Computer Camp will feature two one-week sessions: July 19–24 and July 26–31. The campers, ages 10–17, will have small group instruction and hands-on experience.

For information, contact Michael Zabinski at 203-795-9069, or write to Computer Camp, Grand View Lodge, Box 22, Moodus, CT 06469.

London Micro Show

The 1981 Microcomputer Show will be held July 29–31, 1981, at the Wembley Conference Centre, London, England. A conference program running concurrently with the exhibition will highlight micro applications in business, production and education. Proposed topics for conference sessions include hardware availability, software packages and development, automatic test equipment, robotics and process control.

The 1981 Microcomputer Show is organized by Online Conferences, also the organizers of Viewdata 80, the first world conference on viewdata, videotext and teletext.

Potential exhibitors should contact Jeff Wolf at 800-227-3477; in Canada and California, call 415-474-3000 or write TMAC, 680 Beach St., Suite 428, San Francisco, CA 94109.

Los Angeles Shows

The Business and Personal Computer Sales Expo and the Los Angeles Business Show will be held at the Los Angeles Convention Center from July 9–11. For further information, contact Produx 2000, Inc., Box 2000, Bala Cynwyd, PA 19004.

Microcomputers for Managers

Exhibits and seminars to assist managers in the selection and use of microcomputers will be held in Denver, CO, on July 22–23. For further information, contact International Seminars, Inc., PO Box 7029, University Station, Provo, UT 84602, 801-375-7379.

Summer Computer Camp

Computer Camp East is recruiting instructors to teach programming (APL, BASIC, LOGO, Pascal) and to supervise the use of microcomputers (Apple II, PET, Atari 800, TI 99/4) for coed campers (ages 10–17). The four two-week sessions run from June 29 to July 10, July 13 to July 24, July 27 to August 7 and August 10 to August 21 at the following sites: East Haddam, CT (residential camp), West Hartford, CT (day camp), Hyannis, MA (day camp), Boston, MA (day camp), and Amherst, MA (day camp). Send resume to Professor Howard A. Peelle, Director, Instructional Applications of Computers, School of Education, University of Massachusetts, Amherst, MA 01002.

Computer Arts Festival

The Personal Computer Arts Festival, held in conjunction with the Personal Computing '81 Show at the Philadelphia Civic Center, August 28–30, will feature technical sessions, demonstrations and exhibits, as well as the annual computer music concert and computer graphics film/video show. Computer musicians and artists who would like to speak, exhibit or perform at the festival should contact PCAF '81, Box 1954, Philadelphia, PA 19105.

National Computer Shows

The National Computer Shows has announced its fall schedule of trade and public expositions for manufacturers, OEMs, distributors, dealers and retailers selling small, medium and large computers for business, industry, government and education. The shows feature office systems, data and word processing equipment, telecommunications equipment, electronic typewriters, computers for scientific and engineering applications, microcomputers, computer graphics, computer peripherals, accessories, supplies and software. The shows are: the Second Annual Midwest Computer Show, Sept. 10–13, at Chicago's McCormick Place; the Second Annual Mid-Atlantic Computer Show, Sept. 24–27, at Washington's DC Armory; the Third Annual Northeast Computer Show, Oct. 15–18, at Boston's Hynes Auditorium; and the Southeast Computer Show, Oct. 29–Nov. 1, at the Atlanta Civic Center. Contact the National Computer Shows, 824 Boylston St., Chestnut Hill, MA 02167, 617-739-2000.

Software Info '81

Software Info '81, the National Software Package Conference and Exposition, will be held Sept. 14–17 at Chicago's Merchandise Mart Expocenter. Software product exhibits, seminars and speeches are slated. For more information, contact Software Info, 1730 N. Lynn St., Suite 400, Arlington, VA 22209, 703-521-6209.

Please have calendar announcements in our hands at least two months before the issue in which they are to appear (i.e., by May 1 for the July issue, which comes out at the end of June). Send them to the attention of the Managing Editor (Kilobaud Microcomputing, 80 Pine St., Peterborough, NH 03458).

PERSPECTIVES

(from page 226)

you will be because your best talents are being used.

After you've completed your self-analysis and understand where your greatest strengths lie, it is time to look for the job that will utilize them. If your analysis shows that you enjoy dealing with people and are receptive to individuals' stated needs and can be persuasive, perhaps a sales position is for you. If you find you are creative, enjoy tinkering and like teaching children, you may find your services are desperately needed by electronic toy makers. If you are a stickler for detail, have artistic abilities and have the patience of Job, you may be a natural for masked ROM code layout and integrated circuit design.

When you have a good idea what you have to offer an employer, look at ads in technical magazines and newspapers like *Electronic Design*, *Computer Decisions* and *Electronic News*. You'll be amazed at the number of ads aimed directly at microcomputer personnel these days. Unless you're now a major banking executive or the like, I'll bet you'll be surprised at the salaries listed, too.

Some of the positions listed will require college degrees. Don't let this intimidate you if you don't have one. Some companies will consider certain types of experience just as valuable. Many have entry-level positions where experience can be built. Furthermore, you might be amazed at the similarities between artistic floor tile design and computer schematic design. So whatever your past experience, there is probably a field where it is applicable. Again, it's up to you to decide where your particular talents lie.

Before you rush right off and apply for a job, do some study first.

Before you rush right off and apply for a job, do some study first. Read a book or two that pertains to your area. If you want to be a Z-80 programmer, knowing about a few different authors' approaches to floating point arithmetic would be very impressive to an employer. Study to get there. A microcomputer course taken at a local college could really be a plus in your favor (even if you already have a degree). Don't forget to go over past issues of *Kilobaud Microcomputing* for choice tidbits in your field.

Become an active member in your local computer club. Give a presentation about any areas you may feel comfortable with. Others will learn and appreciate it. You certainly will expand your knowledge that way.

The Search Begins

Once you are properly prepared through analysis and study, it is time to find that big job. Although the want ads can give you ideas of generally what's available and who's looking, by the time it hits print, the position has already been offered to hundreds of people. Companies would rather find people internal to their organization or through referrals than go to the expense of open advertising. In his book, *Guerilla Tactics in the Job Market*, Tom Jackson observes that on any given day, 85 percent of all jobs available are not advertised. I highly recommend that any serious job hunter read this book.

A better approach than passively watching the papers and technical magazines is to actively look for a position. Al-

WP6502®
the finest word processor for
OHIO SCIENTIFIC
New Powerful Version 1.3

WP6502 is accepted as being the best word processor for OSI computers. That was version 1.2. Now there's Version 1.3! V1.3 is the ultra simple, professional and powerful version of WP6502. In addition to the exclusive features that made V1.2 the leader, V1.3 has built-in memory and disk tests, headers, true proportional justify, print from anywhere, super-simple editing, and on and on. On cassette and disk (65D or 65U). Priced from $50 to $250.

Get Our Brochures FREE!


We are not just word processing either! As the most reputable name in OSI software, Dwo has been constantly asked to release non-word processing software. Finally we have! Games, utilities and business applications that are absolutely the best (we guarantee it).

Dwo Quong Fok Lok Sow ✓87
23 East 20th Street
New York, NY 10003
(212) 673-6310



Radio Shack Dealer #R491

MODEL III
LEVEL III BASIC
26-1062



$825.00

WE ACCEPT CHECK, MONEY ORDER, OR PHONE ORDERS WITH VISA OR MASTER CHARGE. SHIPPING COSTS WILL BE ADDED TO CHARGE ORDERS. DISK DRIVES, PRINTERS, PERIPHERALS, AND SOFTWARE—YOU NAME IT, WE'VE GOT IT. WRITE OR CALL FOR OUR COMPLETE PRICE LIST.

C & S ELECTRONICS, LTD. 32 EAST MAIN ST. MILAN, MICH. 48160
✓79 (313) 439-1508 (313) 439-1400

C & S ELECTRONICS MART IS AN AUTHORIZED RADIO SHACK DEALER #491

✓See List of Advertisers on page 194

though you may not realize it, if you have completed the self-analysis and study phases, you are in better shape than about 90 percent of the job hunters on the market today. Not only do you know what your best talents are, but you have also decided how they can best be used. Employers are quick to recognize an individual who knows his talents. Such a person not only knows what he wants for himself, but what he can offer an employer. This type of person is much rarer than you may think.

Although answering an ad in today's paper may turn up the perfect job, look in last year's paper and see who was hiring in your chosen field. Do some research on that company's work. Call their field service representatives or branch offices. Feel out these contacts for leads toward the type of position you want.

Call the head of the department you think you'd like to work for. Tell him you're interested in his line of work and would like an opportunity to discuss this new field and its future with him. Rather than asking him for a job interview for you, ask to interview him as an expert in his field. After getting his opinion of that line of work, describe how you feel particularly suited to work in the field and ask what you need to do to get started. Ask if he knows anyone who would be interested in hiring you.

When inquiring about jobs you will almost always be asked for a resume. Have one ready at all times. Avoid personnel departments as much as possible and deal directly with line managers. These are the people who really understand the positions available and have the final say in hiring. I have often thought personnel departments—bless their corporate souls

Avoid personnel departments and deal directly with line managers.

—to be the curse of modern technology. The people who run them are not technically oriented and will assume a round peg (you) is looking for a square hole (their company).

Placement agencies may be of some interest or use to you, but only if they are fee paid. There is enough demand for microcomputer professionals that companies will pay agency fees. Do not mess with one that tries to dip into your pockets. Generally, I have found agencies to be run by the same type of people that man personnel offices. There is a sad lack of understanding of the growing microcomputer field openings among most personnel agencies. Again, this stems from nontechnically oriented people trying to match capabilities of one name with the needs of another, the sum total of which is meaningless (except for revenue) to them. If you have technical understanding and want to open a personnel agency, I would be interested in sharing some ideas with you.

If you are asked in for an interview with a company, be sure to dress carefully and professionally. While your dress cannot guarantee getting the position you want, improper dress may well guarantee not being able to.

The professional hiring process has nothing to do with favors. There is no need to be nervous. If a company takes the time to ask you in for an interview, it is because they believe you may be of value to them. They hope to profit from the job you can do. If you have done your self-analysis and study, you'll be way ahead of the game and can tell them why you know you can do the job, and even point to achievements from your past that prove it.□

This publication is available in microform.



University Microfilms International

Please send additional information
Name _____
Institution _____
Street _____
City _____
State _____ Zip _____

300 North Zeeb Road
Dept. P.R.
Ann Arbor, Mi. 48106
U.S.A.

30-32 Mortimer Street
Dept. P.R.
London W1N 7RA
England

DEALERS... SELL

kilobaud MICROCOMPUTING


Selling Kilobaud MICROCOMPUTING, the most complete journal of microcomputing, brings the computer enthusiast through your door. Once he's in your store, you can sell him anything.

For information on selling Kilobaud MICROCOMPUTING, call 603-924-7296 and speak with Ginnie Boudrieau, our bulk sales manager, or write to her at Kilobaud Microcomputing, 80 Pine Street, Peterborough, NH 03458.

Our dealers are telling us that Kilobaud MICROCOMPUTING is the hottest-selling computer magazine on the newsstand, so call today and join the ranks of dealers who make money with KM.

kilobaud MICROCOMPUTING

80 PINE STREET PETERBOROUGH NH 03458

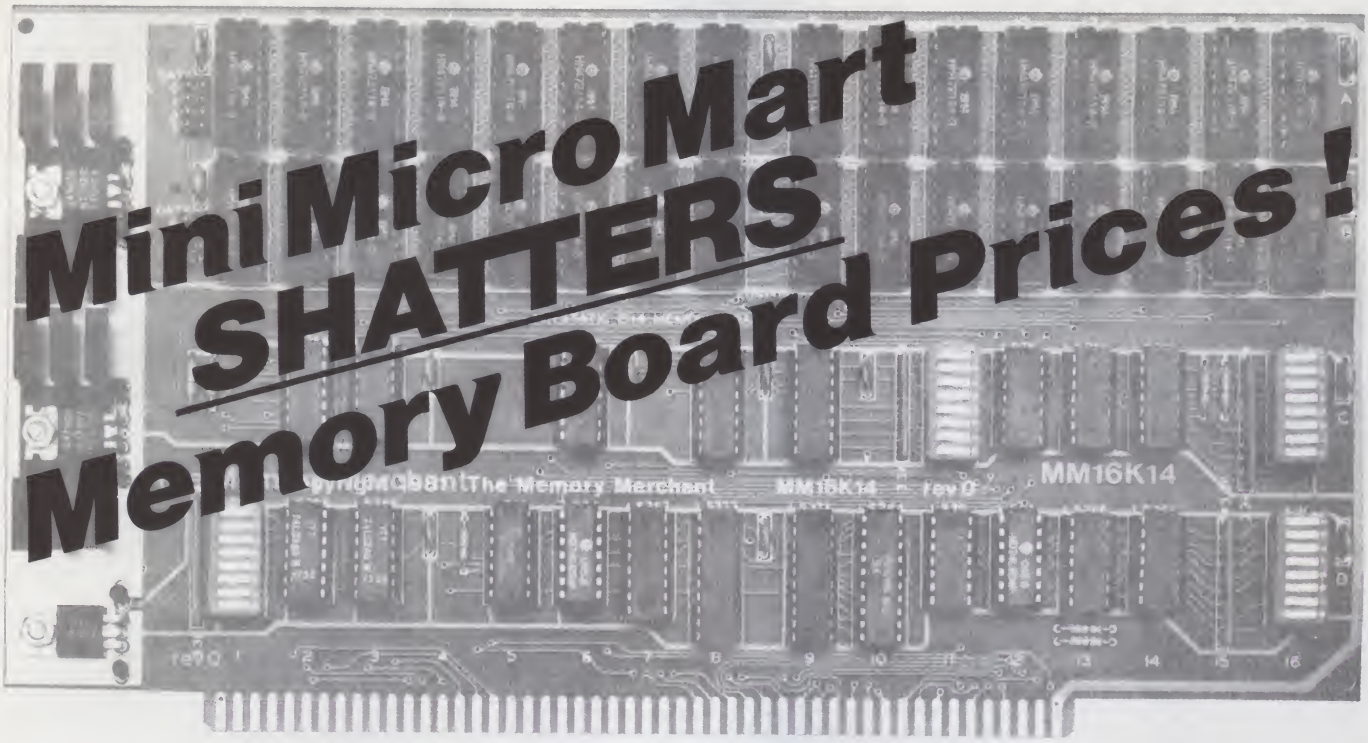

16K Static Ran Board from Memory Merchants

- Low power 16K Static RAM (2114)
- Extended address - 24 bit
- Four independent 4 K blocks
- Bank select logic
- Runs with:
  2 Mhz 8080, 4 Mhz Z80, 5 Mhz 8085

One of the 4K has "windowing" capability — any or all of the 1K sub-blocks may be removed from the memory block.

POWER:
5 v. (nominal 8V on S-100 bus)

ORGANIZATION:
Dip switch selection allows independent placement of any of the 4K blocks to any 4K boundary.

Dip switch control of windows.

BANK SELECT:
DIP switch array allows bank select port to be placed anywhere in I/O space. Jumper slide allows complete flexibility in choosing enable/disable within bank select port. DIP switch selection allows board to be enabled or disabled on power-on reset.

EXTENDED ADDRESS:
Independent DIP switch allows board to be addressed in any of the 256 64K extended address pages.

PHANTOM DISABLE/ENABLE:
Via DIP switch.

SPEED:
300 ns low power 2114 1Kx4 static memory chips. Compatible with 4 Mhz Z80, 5 Mhz 8085, and 2 Mhz 8080's.

DESIGN FEATURES:
Low power Schottky TTL circuitry. All input and outputs fully buffered. Meet specifications of IEEE 696 (S-100 standard).

CIRCUIT BOARD:
Highest quality FR4 epoxy glass material, solder mask, legend. Fully socketed.

Fully assembled and tested, with extended burn in. Serialized board.

WARRANTY
Estended warranty 6 months, no repair; instant replacement.

only $189

The Best Prices and Deliveries

CALIFORNIA COMPUTER
64K Dynamic RAM
ONLY $499

SYSTEM DESIGN
(Formerly Measurement Systems & Controls)
64K Dynamic RAM

DM6400 List $795 . . . . . SPECIAL $599
DMB6400 w/Bank Select Special
List $995 . . . . . SPECIAL $799
Cromix adapter for above $44

238

Mini Micro Mart, Inc. 1618 James Street, Syracuse, NY 13203
(315) 422-4467 TWX 710-541-0431

Terminals and Printers

ZENITH data systems
Z19 Video Terminal



List $995

OUR PRICE
$799

Limited Time

Intertec

NEW INTERTUBE III

List $995 **ONLY $749**

12" display, 24 x 80 format, 18-key numeric keypad, 128 upper/lower case ASCII characters. Reverse video, blinking, complete cursor addressing and control. Special user-defined control function keys, protected and unprotected fields. Line insert/delete and character insert/delete editing, eleven special line drawing symbols.

TELEVIDEO TVI-912C



Upper and lower case, 15 baud rates: 75 to 19,000 baud, dual intensity, 24 x 80 character display, 12 x 10 resolution. Numeric pad. Programmable reversible video, auxiliary port, self-test mode, protect mode, block mode, tabbing, addressable cursor. Microprocessor controlled, programmable underline, line and character insert/delete. "C" version features typewriter-style keyboard. List $950

CALL FOR PRICE

920C (with 11 function keys, 6 edit keys and 2 transmission mode keys, List $1030
CALL FOR PRICE

950C List $1195 . . . . . CALL FOR PRICE

HAZELTINE 1500

Call For Price



1410 w/numeric keypad, List $900 . . . . . CALL
1420 w/lower case and numeric pad . . . . CALL
1510, List $1395 . . . . . CALL
1520, List $1650 . . . . . CALL

SOROC



IQ-120
List $995
SPECIAL
$729

IQ135
$749

IQ-140 List $1495
SPECIAL $1149

CENTRONICS
PRINTERS

NEW 730, parallel, friction, tractor $599
NEW 737 parallel, friction, tractor $799
779-2 w/tractor (same as TRS-80 Line Printer I), List $1350 . . . . . $799
704-9 RS232 180CPS $1595
704-11 Parallel 180CPS $1695


NEC SPINWRITER™



Terminal/Keyboard as well as RO Printer Only models available.

CALL FOR PRICES!

PAPER TIGER

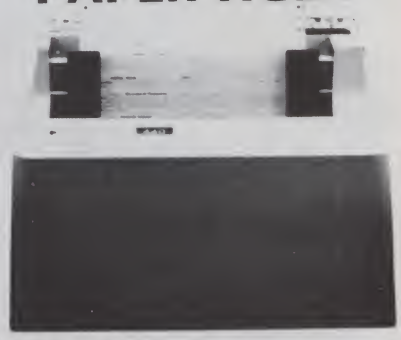

IDS 445 PAPER TIGER $698
IDS 445G PAPER TIGER
Buffer w/graphics option, incl. buffer . . . $789

NEW IDS 460/560
QUALITY PRINTING AT MATRIX SPEED — LOGIC SEEKING PROPORTIONAL SPACING
w/auto test justification

NEW IDS PAPERTIGER 460 List $1295 . . $1099
NEW IDS PAPERTIGER 460G List $1394 . $1149
NEW IDS 560G List $1794 . . . . . $1499
TRS-80 cable $45

TI-810



TI-810 Basic Unit, $1895 . **$1595**
TI-810 w/full ASCII (Lower case), vertical forms control, and compressed print . **$1795**
TI-820w/lower case List $1995 . . . . . $1645
TI-820w/full ASCII, forms control, compressed print . . . . . List $2150 . $1795
TI-745 Complete printing terminal with acoustic coupler, List $1695 . . . . **$1399**

ANADEX
DP9500/DP9501 PRINTERS

DP-9500, List $1650 . . . . . **$1349**
DP-9501, List $1650 . . . . . ***$1349***

ANADEX DP-8000
80-Col. Dot Matrix. **$849**

OKIDATA
Microline 80 List $599 **ONLY** $499
Tractor Feed Option **$109**
Serial interface . . . . . **$ 99**
Microline 82 List $799 $679
Microline 83 List $1260 $1069

AXIOM IMP I **$699**

Epson MX-80 List $645 . . . . . **$499**

Above prices reflect a 2% cash discount (order prepaid prior to shipment). Add 2% to prices for credit card orders, C.O.D.'s, etc. Prices are f.o.b. shipping point. Prices are subject to change and offers subject to withdrawal without notice. **WRITE FOR FREE CATALOG.**

MiniMicroMart, Inc.

✓226

VISA

master charge

1618 James Street, Syracuse NY 13203 (315) 422-4467 TWX 710-541-0431

Computers, Disk Systems

ZENITH data systems



Z89-FA
List $2895
OUR PRICE
$2395

NOW IN STOCK!

Z-89GA
List $2595, Less Disk $2149
A-87 Two Drive
Minifloppy System List $1195..... **$989**
Z-47DA..... **$3695**
8" Two Megabyte Disk System
List $3695..... $3059

INTERSYSTEMS
formerly ITHACA AUDIO

The new Series II CPU Board features a 4 MHz Z-80A CPU and a full-feature front panel. 20-slot actively terminated motherboard, with 25 amp power supply (50/60 Hz operation, incl. 68 cfm fan). DPS-1. CALL



COMPLETE SYSTEM with InterSystem 64K RAM, I/O Board and double density disk controller board. Full 1-year warranty. CALL



NEW! CROMEMCO SYSTEM ZERO/D

A complete 64K Computer with Double Density Disk Controller ..... List **$2995**
OUR PRICE $2545

Companion Disk drive for above — **Quad Density** — Total of 780 Kilobytes of storage on the two drives. ..... **List $1295**
OUR PRICE $1099

Only **$3644** for a complete 64K Disk System

SUPERBRAIN
By INTERTEC



64K Double or Quad Density units available. Uses two Z-80 CPU's. Commercial-type terminal with 12" monitor. Dual double density minifloppies. Over 350 kilobytes of storage (twice that with quad density drives). Two serial RS232 ports, I/O ports standard. Expandable with optional S-100 interface. Comes with CP/MTM 2.2 operating system. MiniMicroMart can supply a wide range of CP/M development and application software.

w/64K Double Density, List $3495 .. **$2869**
w/64K Quad Density, List $3995..... **$3395**



HEWLETT PACKARD
HP-41CV
AVAILABLE NOW!
$259.

DYNABYTE
DB 8/1



DB 8/1-64 — 64K RAM SYSTEM WITH Z80 CPU and 2 serial and 1 parallel I/O. List $3395, Disc. $2850 OUR PRICE $2795

HEWLETT PACKARD **HP-85A**
Desk-Top Computer
List $3250



$2749

F.O.B. shipping point. All prices subject to change and all offers subject to withdrawal without notice. Advertised prices are for prepaid orders. Credit card and C.O.D. 2% higher. C.O.D. may require deposit.

MORROW
THINKER TOYS® DISCUS M26™

26 megabytes of formatted storage
List $4,995 **$4,199**




THINKER TOYS® DISK SYSTEMS
Now includes CP/M® 2.2

Discus 2D, List $1199	$998
Discus 2D, dual-drive, List $1994	$1669
Discus 2 + 2, A&T, List $1549	$1299
Dual Discus 2 + 2, A&T, List $2748	$2299

All Morrow floppy disks include CP/M® 2.2 and Microsoft Basic 80

MORROW



List $3695
DISCUS M-10
10 Megabyte Wirchester
OUR PRICE
$3095

NEW! CROMIX FROM CROMEMCO
A New UNIX Like Disk Operating System.
With true multi-user, multi-tasking capabilities
List $295 ..... **OUR PRICE $249**

NEW! DOUBLE DENSITY CONTROLLER BOARD FROM CROMEMCO
With built-in diagnostics
16 FDC Controller, List $595 **OUR PRICE $505**

— WRITE FOR FREE CATALOG —

Mini Micro Mart, Inc.

1618 James Street, Syracuse, NY 13203
(315) 422-4467 TWX 710-541-0431

By R. M. Dumse

Is Your Future In Micros?

Career Opportunities Abound

Is your hobby time more productive than your time at work? Does it offer more personal satisfaction? Do you look forward to your hobby while on the job?

If you spend more than two hours a week playing with, reading about, programming or otherwise being involved in your microcomputer, odds are you are suffering from hidden talent. Furthermore, if you find those hours more satisfying than the 40 or so you spend on your life's work, it may be time for a career change. Exciting, new professional positions are immediately available. The decision is yours. You may find your future in microcomputers. Realizing this helped me enter the most satisfying job I've ever had. At the same time, I've doubled my salary in less than three years.

Even without knowing it, nearly everyone is now affected by microprocessors. The digital wristwatch, the electronic TV game, the timer on the microwave oven, the traffic lights and a host of other devices you see and use every day are based on microprocessors. And we've only just begun!

If you are one of the individuals who has taken the time to buy a microcomputer, you've participated in a billion dollar business that didn't exist five years ago. That kind of growth can mean only one thing—thousands and thousands of new jobs.

These positions are available in vastly different areas, too. Hardware design and programming are two large areas, but there are endless possibilities. Applications, testing, product evaluation, sales, marketing analysis, project leaders, management and store operator positions are just a few. Many of the engineering jobs are found in California and the sun belt, but are not restricted to that region by any means. Sales positions are everywhere, and as the momentum of the microcomputer revolution continues to increase, other openings will spring up.

R. M. Dumse (4781 Sanbert, Placentia, CA 92670) is an applications engineer and R6500 series designer course instructor at Rockwell International. He represents their line of four-, eight- and 16-bit processors and support devices at trade shows and customer interviews.

Employed or Self-Employed?

Because there are several excellent idea and "how-to" books on working for yourself (i.e., Don Lancaster's *The Incredible Secret Money Machine* and Joe Weisbecker's *Home Computers Can Make You Rich*), it is not my intention to cover the area of self-employment. This certainly does not mean it is not desirable or profitable. It certainly can be, and I know individuals who are becoming rich doing it. Before you decide to go into business for yourself though, look up your local computer store operator. Buy him a cup of coffee, and he'll probably be delighted to sober you with his problems.

An important question you may ask yourself is, "Who are the people filling these new jobs?" If your first reaction is those with years of experience, think again. Professionals with over four years' experience in microprocessors are as scarce as hens' teeth. Remember, micros did not exist until the mid-seventies. It takes time for new professionals to join the ranks.

Surprisingly, most of the "pre-micro" computer specialists are ill-prepared to jump into a micromarket. Take programmers as an example. The largest percentage of the last decade's programmers worked in high-level, business-oriented languages. Many are set in their ways and have no intentions of changing. The greatest applications of micros will not be in the business field, but in the scientific area. Software will be needed for special applications, voice generators, simulators, data collection, real-world monitoring and control. These are, typically, written in low-level codes such as assembler, machine and scientific languages. (BASIC, FORTH and C, for example.)

Many of the applications involving real-time processing are interrupt-driven and require input/output procedures. They may also require a minimal understanding of hardware. Any hobbyist who has ever successfully interfaced his micro to a printer or display, has added a real-time clock or written animated software for his micro, has an immense advantage and understanding over a more "conventionally experienced" programmer.

Analysis and Study

Since there are so many types of jobs available, your first step will be deciding which ones appeal to you. A very important part of this will come from soul-searching. You must identify your unique set of talents. You will only be satisfied when your best talents are properly used.

I highly recommend the self-analysis outlined by Bernard Haldane in his book, *How to Make a Habit of Success*. You should list the major accomplishments of your life on a sheet of paper. They may or may not have anything to do with your life's work; the only thing that matters is that they give you satisfaction and a good feeling. Then list the key qualities in each item; for example, resourcefulness, creativity, problem solving, management, etc. You should quickly begin to see a pattern developing. These key factors repeated over and over again are your hidden talents demanding expression.

This analysis is very important in deciding your future. It works because while everyone has thousands of experiences each day, some stand out as being milestones in our lives. Even though two people may do the same thing the same way, one will mark the event in his mind as a crowning achievement, while the other simply remembers it (if at all) as only an ordinary happening. You remember your greatest accomplishments because they have meaning to you. Your memory is trying to tell you something; that is, this is the kind of thing that will make you happy. The more you do it, the happier

(continued on page 221)

If you write software, write Digital Research.

We can help you bring your products to market.

Independent Software Vendors (ISV's) are the key to solving the software crunch in the 1980's. To help you bring your products to market, Digital Research introduces the ISV Support Plan — designed to assist you in:

Developing Your Product

- ☐ With the fast and powerful PL/I-80™ Programming System
- ☐ ISV Seminars covering high level applications programming

Getting Established in Your Market

ISV Seminars cover:

- ☐ Designing a marketing strategy
- ☐ Advertising
- ☐ Writing Manuals
- ☐ Assuring software security
- ☐ Supporting and updating products


On-Going Support Includes:

- ☐ Legal and technical information
- ☐ Distribution channels
- ☐ Printing facilities
- ☐ Free product listing in our Applications Software Catalog

All this plus the world's largest software marketplace — the CP/M® customer base.

So why do it alone? Write Digital Research. We'll send you our free brochure detailing the ISV Support Plan.

DIGITAL RESEARCH®
P.O. Box 579
Pacific Grove, CA 93950
(408) 649-3896
TWX 910 360 5001

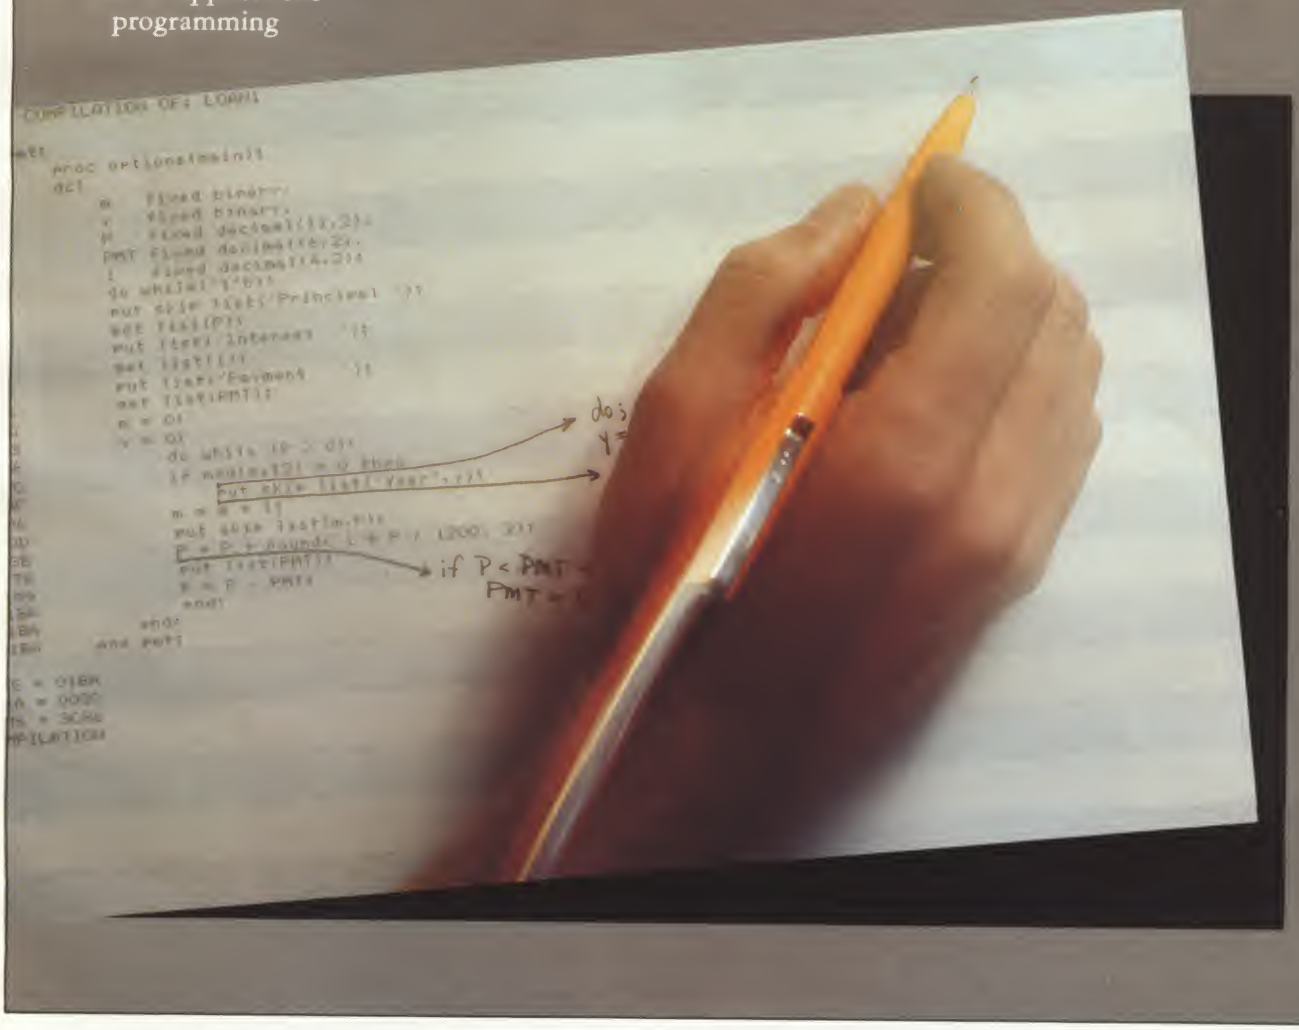

See List of Advertisers on page 210

A cost effective 10 megabyte system from the leader in Winchester based microcomputers.



C2-D
$6,795

Ohio Scientific has put a low-cost, high-performance 8″ non-removable hard disk together with its popular desk-top microcomputer system. This yields approximately 10 megabytes of fast hard disk capability at a tremendous cost/performance benefit over floppy based microcomputer systems.

C3-D

The 10 megabyte system is also available with the added advantage of triple microprocessors — the 6502A, 68B00 and Z-80A. This allows you to make maximum use of Ohio Scientific's extensive software library as well as programs offered by independent suppliers and publishers. $7,600.

C2-D
Standard Features

- 52K RAM
- 8″ floppy disk drive for program transport and backup.
- OS-65U small business operating system.
- 9-digit precision BASIC by Microsoft.
- Available in OEM quantities at attractive discounts.

For literature and the name of your local dealer, CALL 1-800-321-6850 TOLL FREE.

OHIO SCIENTIFIC

a MASCOM Company

1333 SOUTH CHILLICOTHE ROAD, AURORA, OH 44202 • (216) 831-5600